

Hooded Roof Propeller Fans

Belt and Direct Drive

Exhaust, Supply and Reversible



BUILDING VALUE IN AIR.



February
2024


Hooded Roof Propeller Fans

Exhaust Supply/Reversible Belt and Direct Drive



Table of Contents

Model Comparison.....	3	Material Data	11
Standard Construction Features.....	4-5	Model Number Code	11, 18
Options and Accessories.....	6-7	Direct Drive	11
High Wind & Hurricane	7	Belt Drive	18
Seismic.....	7	Performance Pages	12-49
Vari-Green® Options.....	8	Typical Specifications	50-51
Reversible Models	9	Basics of Fan Selection.....	52
Dimensional Data.....	10		

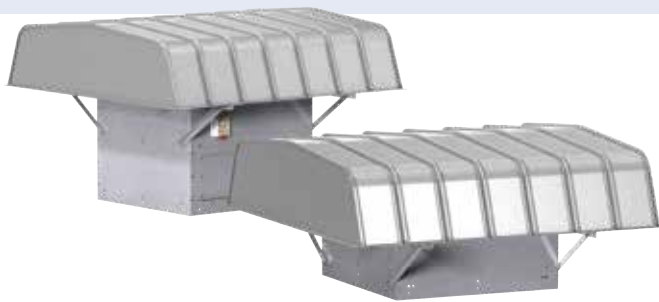

From general ventilation of factories and warehouses to industrial duty, the range of construction and performance capabilities offered in this catalog represent the most comprehensive hooded propeller roof fan line available.

Regardless of fan size, performance or duty level, all Greenheck hooded propeller roof fans are built to perform with the same high standards of reliability and durability.

Exhaust, supply and reversible models are available in belt or direct drive. Filtered supply is also available. Propellers are available in fabricated steel, fabricated aluminum or cast aluminum. Drive frames and panels are constructed to match the level of duty and the motor size.

Greenheck offers a complete line of accessories, which include protective guards, tall bases, dampers, disconnect switches and special coatings.



Greenheck Fan Corporation certifies that the RE2, RCE3, RS2, RCS3, RBE, RBCE, RBS, RBCS, RBF and RBCF models shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



Hooded Propeller Roof Fan models are listed for electrical (UL/cUL 705) File no. E40001

*UL is optional and must be specified

Performance as cataloged is assured.

Enjoy Greenheck's extraordinary service, before, during and after the sale.

Greenheck offers added value to our wide selection of top performing, energy-efficient products by providing several unique service programs.



Our Quick Delivery program ensures shipment of in-stock products within 24 hours of placing your order. Our Quick Build made-to-order products are manufactured in 1-3-5-10-15 or 25-day production cycles, depending upon its complexity.



Greenheck's free Computer Aided Product Selection program CAPS®, rated by many as the best in the industry, helps you conveniently and efficiently select the right products for the challenge at hand.



Our 3D service allows you to download, at no charge, easy-to-use AutoDesk® Revit® 3D drawings for many of our ventilation products.



Find out more about these special services at greenheck.com

Model Comparison

Exhaust Supply/Reversible Belt and Direct Drive

Direct Drive Fan Selection





Two propeller and drive frame combinations are available. These models are designed and constructed for applications with static pressure ranges up to 1 in. wg. Models RE2 and RS2 are available with welded and die formed steel blades, while models RCE3 and RCS3 offer a cast aluminum propeller. For low sound applications, it is best to select the largest fan with the lowest RPM to meet the performance requirements. This ensures the tip speeds will be as low as possible.

Construction Levels		Models - Performance Pages				Size Range Wheel Diameter	Performance	Propellers	
		Exhaust	Supply	Filtered	Reversible				
Level 2	Fully welded steel or die formed steel blades	RE2 pg 12	RS2 pg 14	—	—	18 to 54 in. (457 to 1372 mm)	Up to 44,000 cfm (74,756 m ³ /hr) and up to 1 in. wg (249 Pa)	Level 2	
Level 3	Cast aluminum airfoil blades	RCE3 pg 13	RCS3 pg 15	*RPDRF	*RPDR pg 16-17	20 to 54 in. (508 to 1372 mm)	Up to 46,000 cfm (78,155 m ³ /hr) and up to 1 in. wg (249 Pa)	Level 3	

*Reversible performance is equivalent in the exhaust and supply mode.

Belt Drive Fan Selection

Application requirements for sound and static pressure determine propeller type. Propellers are available in fabricated steel or cast aluminum.

Construction Levels		Models - Performance Pages				Size Range Wheel Diameter	Performance	Propellers	
		Exhaust	Supply	Filtered	Reversible				
Level 1	Galvanized steel blades riveted to the hub	RBE pg 19-25	RBS pg 28-34	RBF pg 37-43	—	20 to 54 in. (508 to 1372 mm)	Up to 30,000 cfm (50,970 m ³ /hr) and up to 5/8 in. wg (156 Pa)	Level 1	
Level 2	Dual thickness galvanized steel blades riveted to the hub	RBE pg 19-25	RBS pg 28-34	RBF pg 37-43	—	20 to 60 in. (508 to 1524 mm)	Up to 53,000 cfm (90,048 m ³ /hr) and up to 3/4 in. wg (19 Pa)	Level 2	
Level 3	Fabricated, fully welded and gusseted steel blades	RBE pg 19-25	RBS pg 28-34	RBF pg 37-43	—	24 to 72 in. (610 to 1829 mm)	Up to 87,000 cfm (149,513 m ³ /hr) and up to 1 in. wg (249 Pa)	Level 3	
Level 3	Cast aluminum airfoil blades	RBCE pg 26-27	RBCS pg 35-36	RBCF pg 44-45 *RPBRF	*RPBR pg 46-49	24 to 72 in. (610 to 1829 mm)	Up to 87,000 cfm (149,513 m ³ /hr) and up to 1 in. wg (249 Pa)	Level 3 - Cast	

Belt Drive Blade Designs




L Propeller: Swept, steeply pitched blade design. These propellers typically run at lower RPMs and generate low sound levels making them the best selection for sound critical applications or applications requiring the best combination of

both air and sound performance. Typically used when the static pressure is 0.5 in. wg (13 mm) or less.



H Propeller: Straight, moderately pitched blade. It is designed for applications where static pressures are above 0.5 in. wg (13 mm). These propellers typically run at higher RPMs and generate slightly higher sound levels than the “L” propellers.

Superior Hood Design

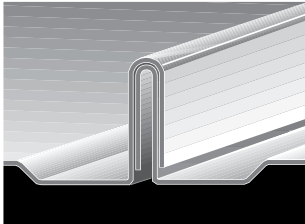

Greenheck's interlocking rib design combines four material thicknesses with I-beam design principles producing a hood far superior in strength to conventional designs (an important feature in high snow or wind load regions). Formed channels adjacent to the ribs provide water drainage to ensure weather tightness.

Hoods are available in galvanized steel, painted steel, or aluminum construction. Hood support angles are heavy-gauge galvanized steel. Hood panels and supporting frame members are shipped loose to the field.

Construction Features

- **Fan hoods** and **bases** are constructed of galvanized, aluminum, steel, or painted steel as specified. Hood panels are arched and precision roll-formed for strength and weather tightness. Hoods are field bolted to heavy-gauge support angles. Bases include prepunched mounting holes.
- **Propellers** are constructed with fabricated steel or cast aluminum blades and hubs. All propellers are statically and dynamically balanced. Reversing fan propellers are designed to produce a high level of efficiency over a broad selection range. Tapered airfoil blades are cast of aluminum alloy. The reversible propeller is designed to move air in both the exhaust or supply modes.
- Permanently lubricated, sealed ball bearing pillow block **bearings** are 100% factory tested and are designed specifically for air handling applications with a minimum (L_{10}) life in excess of 100,000 hours (L_{50} average life of 500,000 hours) at maximum cataloged operating speeds.
- **Fan shafts** are precisely ground and polished steel sized so the first critical speed is at least **25% over the maximum operating speed**. Close tolerances where the shaft makes contact with the bearing result in longer bearing life.
- Heavy-duty ball bearing **motors** are carefully matched to the fan load.
- **Drives** shall be sized for a minimum of 150% of driven horsepower. **Pulleys** shall be fully machined cast iron, keyed and securely attached to propeller and motor shafts. **Motor sheaves** shall be adjustable for final system balancing. **Belts** are static-free and oil resistant.
- **Drive frames** (belt drive fans) or **motor support frames** (direct drive fans) and panel assemblies are constructed of heavy-gauge steel.
- **Fan panels** are constructed of heavy-gauge steel with a deep-formed inlet venturi. Reversible fans are constructed of heavy-gauge steel with a double venturi for efficient airflow.

Access and Service

Periodic maintenance requires accessibility to fan components such as motors, belts, pulleys and propellers located under the hood. Greenheck's hooded roof propeller fan design incorporates many service-friendly features which reduce maintenance time and promote proper servicing. These features include:

- **Hinged Hood** - Sizes 36 and smaller can be hinged by removing two of the four hood fasteners. The hood may then be laid over on the roof deck while servicing.
- **Removable Hood** - Sizes 36 and larger allow for complete removal of the hood by removing the four hood fasteners.
- **Removable Birdscreens** - Inspection of fan components is quick and easy by removing the quick-release birdscreen sections on either end of the unit while leaving the hood in place. Birdscreens are constructed of 1/2 inch galvanized steel mesh. Filters are optional. Access for sizes 42 and larger is from underneath the hood by removing the birdscreen or filters.



Filtered Supply

Filtered supply fans (models RBF, RBCF, RPDRF, and RPBRF) with 2-inch aluminum mesh, washable filters are available for applications where contaminants must be removed from supply air. Basic hood and fan construction is similar to the nonfiltered models.



Filter removal for cleaning or replacement can be easily done by opening the hood and sliding the filters out of the open end racks. In fan sizes 36 and larger, access panels on either end of the hood are provided to allow filter removal without raising the hood.

Easy Field Assembly of Hoods




Fans ship in kitted sections— assembled fan module, hoods and supporting structural components – for easy assembly. Hood assembly requires no special tools or training. Each fan comes with complete illustrated assembly and installation instructions.

Reversible Fans

Ventilation requirements are often subject to daily or seasonal changes in temperature. Greenheck's reversible fans (models RPDR, RPBR, RPDRF, and RPBRF) are designed for non-ducted systems or those with short duct runs and offer the ability to either exhaust or supply air on demand to maintain comfortable working conditions. By exhausting excess heat or supplying fresh outside air, the reversing fan saves cooling costs. Fewer fans required on the job mean lower initial costs and lower installation costs with fewer roof penetrations.

One Fan – Two Functions

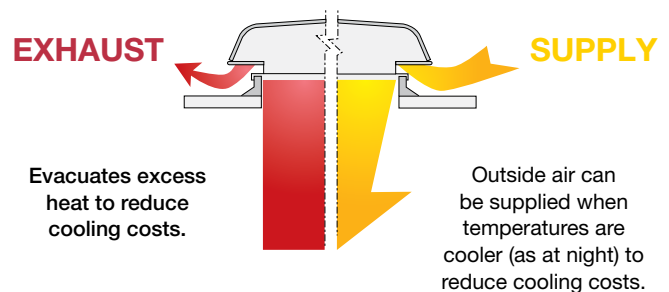


Tall Base –

Tall bases are recommended for installations that include a gravity damper or a motorized damper and greatly simplifies installation and servicing. The damper components are factory assembled as part of the tall base and shipped as a single unit reducing field assembly time and costs. Inspection, service and cleaning of the damper, actuator and linkages are made easy with an access door including two cam latches with plated steel handles and a slide-out rack. Tall bases provide the necessary minimum spacing between the propeller and the damper. The tall base increases the standard height to provide additional weather tightness from rain and snow intake due to the elevated hood. There is ample space within the tall base for ease of initial electrical wiring.




Tie-Down Feature – In locations where strong winds may occur, cable tie-downs are recommended to secure fans to the roof structure to prevent damage to the hood. Cables are by others.

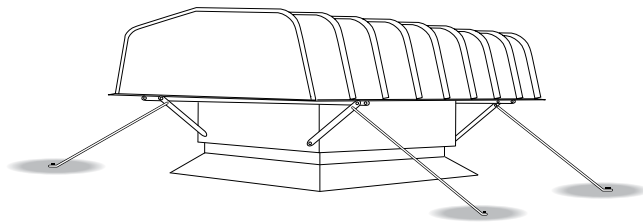

Four galvanized steel brackets are provided as standard on all hooded propeller roof fans as cable attachment tie-down points at the ends of each hood support rail.

Safety Guards – Safety guards mounted to the fan inlet are recommended to protect the fan and nearby personnel in non-ducted applications. The installer should provide a safety guard if not ordered with the fan.

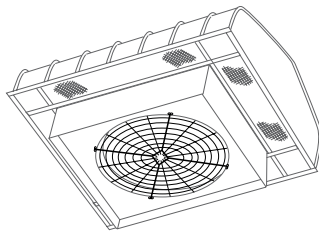


Hood Insulation – Fiberglass insulation attached to the underside of the hood to minimize condensation and reduce sound is available in either 1/2-inch or 1-inch thicknesses.

Aluminum Housings – Aluminum exterior construction is available for the hood sections and bases of all models. Aluminum housings can also be coated with decorative or protective finishes.

Roof Curbs – Prefabricated roof curbs are available to reduce installation time and costs by ensuring compatibility between the fan, the curb and the roof opening. All curbs are available in steel or aluminum construction and are lined with fiberglass insulation to prevent condensation and reduce sound levels. See Greenheck's roof curb catalog for complete details.

Curb Cap Stripping – Rubber curb cap stripping attached to the underside of the curb cap is available to provide a seal between the fan and the roof curb.

Insect Screen Base – Insect screen bases are available for applications where the building must be insect free, as in food processing operations. Construction is steel or aluminum with a fine mesh aluminum screen. The base includes an access door to allow easy removal of the screen section for cleaning and periodic inspection.

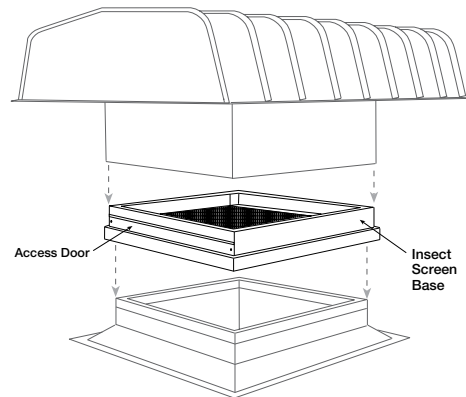

Coatings – A wide variety of coatings and colors are available. Greenheck coatings and resistance charts can be found in the Performance Coatings Commercial and Industrial Fans color chart and in our Coatings Application Guide.



Permatector™ is our standard coating. Typically used for applications that require corrosion resistance in indoor and outdoor environments. Color is RAL 7023 concrete grey.



Hi-Pro Polyester is resistant to salt water, chemical fumes and moisture in more corrosive atmospheres. It has superior chemical resistance, excellent abrasion and outdoor UV protection. This coating has protective qualities that exceed Air Dry Heresite. Color RAL 7023 concrete grey is standard; choose from standard decorative colors or color match any color.



Extended Lubrication Lines – Extended lubrication lines allow for fan shaft bearing lubrication without disassembling the unit or removing the hood. Lubrication lines with grease fittings extend from the fan shaft bearings to the exterior of the fan base.

Lifting Lugs – Four heavy-gauge steel brackets are available to provide lifting points when raising the fan to the roof.


Disconnect Switches – Toggle type and heavy-duty disconnect switches are available for positive electrical shut-off and safety in servicing fans. The following switches are available to meet individual electrical requirements and can be factory-mounted or shipped loose for field mounting. Wiring from the motor to the disconnect box is provided with factory-mounted disconnect switches.

- NEMA-1 for general purpose
- NEMA-3R for rain resistance
- NEMA-4 for watertight
- NEMA-3R and NEMA-4 for heavy-duty
- NEMA-7 and NEMA-9 for Class 1 and Class 2 hazardous locations and explosion resistant applications.



UL/cUL 705 – All belt and selected direct drive fans with totally enclosed, TE standard efficiency, single-speed motors are available with the UL/cUL 705 listing for electrical.

1-Point Wiring – Available when the following items are selected: a tall base, common voltages on the motor and the actuator, and disconnect mounted and wired. The wires are pulled from the motor and the actuator on the damper to the disconnect box. (Hard-wiring of the components to the disconnect switch is by others.)

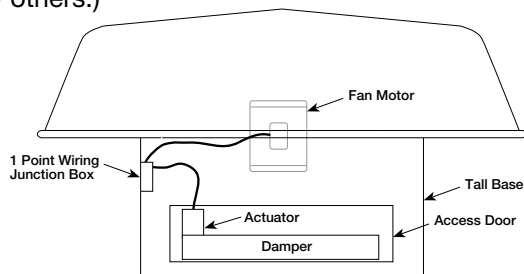


Exception: When a specific voltage is not available on the actuator, Greenheck will provide a hard-wired transformer to the actuator. Greenheck will then pull the wires from the transformer to the disconnect box.

Wiring Pigtail – Available only in conjunction with factory-mounted disconnect switches. Liquid-Tite wiring extends beyond the fan and allows direct hook-up to the power supply. This eliminates field wiring within the fan. Internal or external power supply can be specified.

End Switches – Factory-mounted end switches allow the damper to open completely before the fan is energized. This reduces back pressure and brake horsepower load on the fan motor at start-up.


Dampers – Backdraft dampers (also called gravity dampers) allow airflow in one direction and prevent reverse airflow for use in the exhaust or intake HVAC systems. Backdraft dampers can either be operated by gravity (where pressure or velocity opens and closes the damper) or motorized to open and close when required. *When the damper is not factory-installed in a tall base, the damper is to be installed under the roof curb to provide adequate distance from the fan.*

• **Backdraft Dampers Exhaust and Supply Gravity or Motorized**

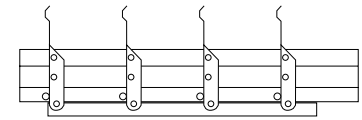


Backdraft Damper Gravity

Backdraft dampers are constructed with a galvanized steel frame and aluminum blades with vinyl blade seals. Gravity dampers open by pressure differential and close by an adjustable spring.

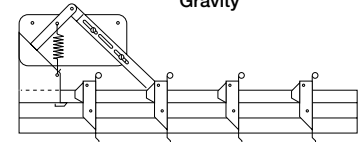

Backdraft Damper Motorized

• **Heavy-duty Backdraft Dampers Exhaust and Supply Motorized**

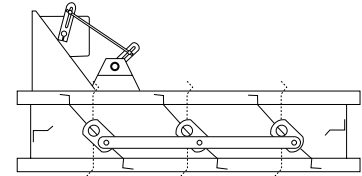

Heavy Duty Backdraft Damper - Motorized

These dampers have heavy-galvanized steel frames and blades and are available in standard leakage, low leakage and insulated low leakage configurations. Heavy-duty backdraft dampers handle higher volumes of air than standard backdraft dampers. Ultra-low leakage dampers with extruded aluminum blades are available with galvanized steel or extruded aluminum frames. All low leakage dampers include vinyl blade and jamb seals.

High Wind and Hurricane Ratings – All certified rooftop prop models are tested to both Miami-Dade County and the state of Florida high wind standards for use in hurricane zones. Sizes up to a 48-inch prop on unfiltered models and up to a 42-inch prop on filtered models are available with the high wind ratings. For more information see Miami-Dade County NOA 23-1122.03 and Florida Product Approval FL41781.

Seismic-Rated Fans – All certified rooftop prop fans are tested and certified to the worst-case scenario seismic conditions for use anywhere in the United States. All fans are shaker table tested and certified to California HCAI seismic standards as well as IBC 2006 and 2009 standards. For more information, see California HCAI certification - OSP-0113-10.



Motors

Greenheck's electronically commutated (EC) Vari-Green® (VG) motor combines motor technology, controllability and energy efficiency into one single low maintenance unit. When combined with Greenheck fans, the VG motor offers variable volume capability and energy efficiency without using a variable frequency drive (VFD). The Vari-Green motor has built-in overload and temperature protection, so it does not require a stand-alone motor starter for protection.

Dial-on Motor Control – A potentiometer (dial-on motor control) is mounted on the motor for easy speed adjustment for system balance. Simply turn the dial; there are no belts and pulleys to adjust.

Control Wire Inputs – The motor accepts a 0-10 VDC signal from Building Automated Systems or other controls to adjust motor speed.

Controls

Hand/Off/Auto (HOA) – Provides the hand/off/auto functionality of a motor starter and allows for easy integration into other building systems. Set fan speed at this control (hand mode), stop the fan (off mode), or have another control toggle the fan on/off (auto mode). Two auto modes are available. The first allows a user to set the fan speed on the control and turn the fan on/off remotely. The second allows a user to turn the fan on remotely and pass a 0-10V signal from another control for a speed reference. 24V is also available for powering other controls.

Remote Dial – Allows for remote, manual airflow adjustments. Wall plate with dial may be mounted in a standard 2x4 inch electrical junction box.

Two Speed Control – Control allows motor RPM to set at two independent speeds (high or low). Meets minimum airflow requirements with the ability to bump up to high speed in an emergency to meet maximum airflow requirements, or reset down to low speed for energy conservation.

Constant Pressure Control – Control Vari-Green motor via static (variable volume) or velocity (constant CFM) pressure on the inlet or outlet side of the fan. Available with duct or room probes for use in:

- Multifamily structures – Apartments, condos, hotels, utility rooms, residential kitchens and bathrooms.
- Institutional facilities – Schools, prisons, multistory office buildings, bathrooms.

Air Quality - VOC – Control a Vari-Green motor via changes in volatile organic compounds (VOCs). VOCs are gasses that are emitted from humans, building materials, perfumes, foods, and furniture off-gassing. The range is 0-2000 CO₂ PPM equivalent.

- Institutional facilities – Schools, courthouses, hospitals, bathrooms, waiting rooms, cafeterias.
- Commercial buildings – Office spaces, conference rooms, bathrooms, break rooms.

Air Quality - Temperature and Humidity – Control a Vari-Green motor via changes in temperature, humidity, or both. The range is 32 to 120°F and 0 to 100% relative humidity.

- Multifamily structures – Apartments, condos, hotels, bathrooms, utility rooms.
- Commercial buildings – Office buildings, office spaces, conference rooms, utility rooms, bathrooms.



Reversible Models Only


Filter Performance


For reversible models, RPDRF and RPBRF, with 2-inch washable aluminum filters, use the filter performance graph below to determine the static pressure drop added by the filters. The filter loss is included in the performance data and no calculation will need to be determined for the RBF and RBCF models.

The airflow (CFM) and the desired fan size must be known to determine the pressure drop added by the filters.

Example: Size 42-inch RPDRF for 20,000 cfm at 0.125 in. wg.

- On the graph below, locate the 20,000 cfm line and read upward to its intersection with the 42-inch curve. Read left to the static pressure (in. wg), in this case 0.14 in. wg.
- Add 0.14 in. wg from the filter chart to the original 0.125 in. wg for a total of 0.265 in. wg.
- Using the RPDR-42 performance table on page 17, 20,000 cfm at 0.265 in. wg falls into the 5 hp range at 1025 frpm. In a supply mode you do not want to exceed 600 frpm to prevent intake of moisture.

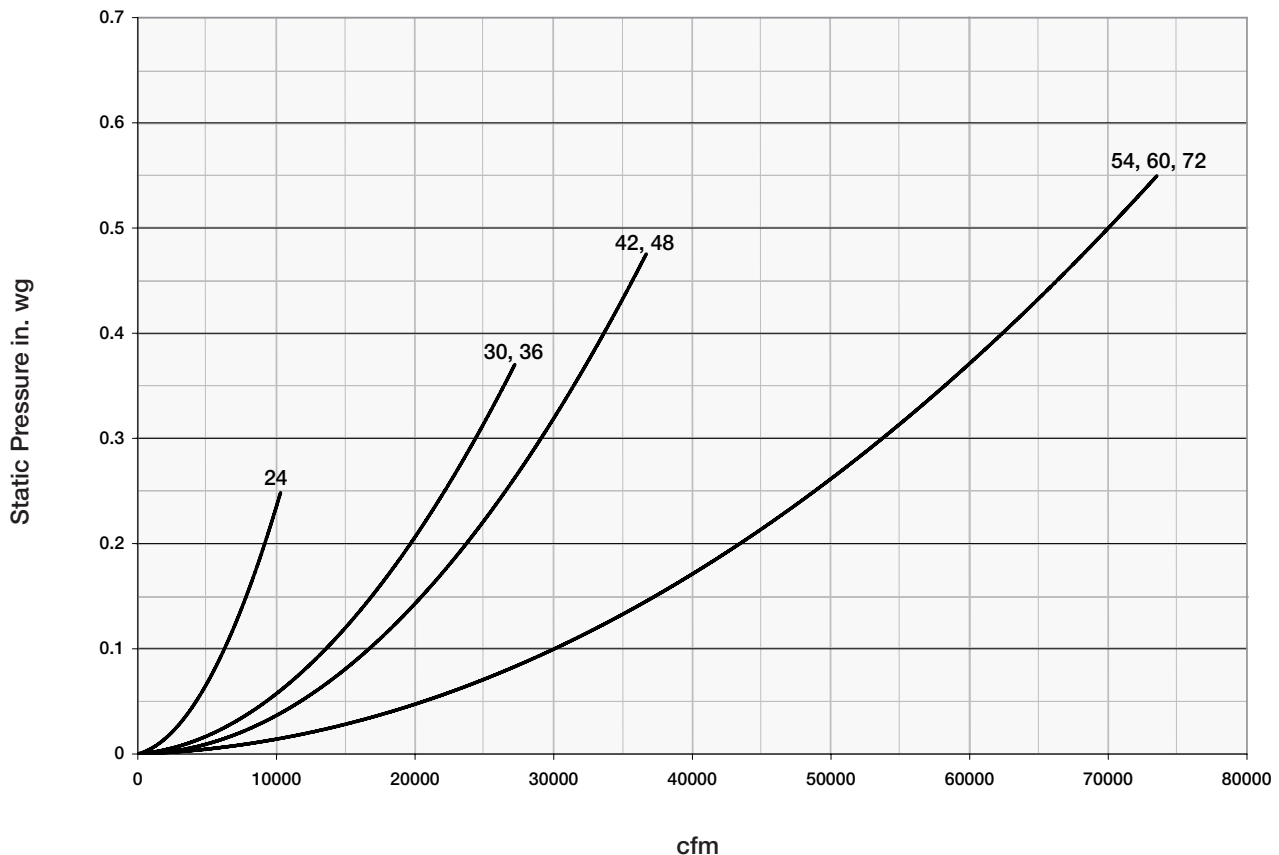

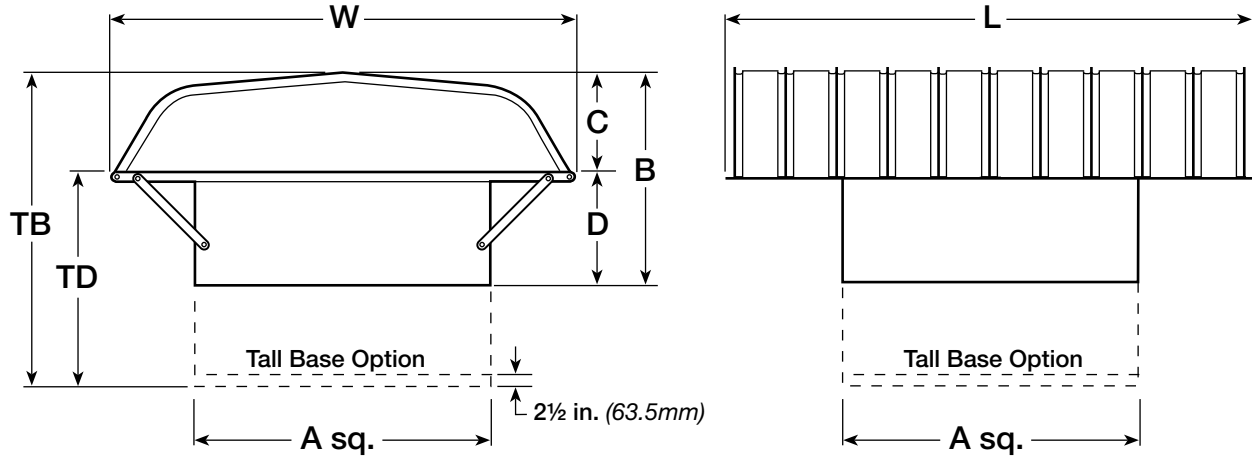

Exhaust / Supply RE2, RS2, RCE3, RCS3, RBE, RBS, RBF, RBCE, RBCS, RBCF

(Belt Drive Sizes 20-72 Direct Drive Sizes 18-54)

Fan Size	A*	C	Standard Base		Tall Base		Standard Hood	Filtered Hood	Damper Size*	Roof Opening*
			B	D	TB	TD	W x L	W x L		
18	28-1/4 (718)	13 (330)	23 (584)	10 (254)	40-1/4 (1022)	27-1/4 (692)	48 x 51 (1219 x 1295)	—	18 (457)	20-1/2 (521)
20	30-1/4 (768)	16 (406)	27 (686)	11 (279)	44-1/4 (1124)	28-1/4 (718)	54 x 51 (1372 x 1295)	54 x 51 (1372 x 1295)	20 (508)	22-1/2 (572)
24	34-1/4 (870)	18 (457)	29 (737)	11 (279)	46-1/4 (1175)	28-1/4 (718)	66 x 63 (1676 x 1600)	66 x 63 (1676 x 1600)	24 (610)	26-1/2 (673)
30	40-1/4 (1022)	20 (508)	34 (864)	14 (356)	51-1/4 (1302)	31-1/4 (794)	75 x 75 (1905 x 1905)	78 x 87 (1981 x 2210)	30 (762)	32-1/2 (826)
36	46-1/4 (1175)	22 (559)	39-1/2 (1003)	17-1/2 (445)	56-3/4 (1441)	34-3/4 (883)	88 x 87 (2235 x 2210)	94 x 87 (2388 x 2210)	36 (914)	38-1/2 (978)
42	52-1/4 (1327)	24 (610)	42-1/2 (1080)	18-1/2 (470)	59-3/4 (1518)	35-3/4 (908)	86 x 99 (2184 x 2515)	93 x 99 (2362 x 2515)	42 (1067)	44-1/2 (1130)
48	58-1/4 (1480)	24 (610)	43-1/2 (1105)	19-1/2 (495)	60-3/4 (1543)	36-3/4 (933)	93 x 111 (2362 x 2819)	112 x 111 (2845 x 2819)	48 (1219)	50-1/2 (1283)
54	64-1/4 (1632)	26-1/2 (673)	49 (1245)	22-1/2 (572)	66-1/4 (1683)	39-3/4 (1010)	112 x 111 (2845 x 2819)	124 x 123 (3150 x 3124)	54 (1372)	56-1/2 (1435)
60	70-1/4 (1784)	26-1/2 (673)	50 (1270)	23-1/2 (597)	67-1/4 (1708)	40-3/4 (1035)	124 x 123 (3150 x 3124)	136 x 135 (3454 x 3429)	60 (1524)	62-1/2 (1588)
72	82-1/2 (2096)	29 (737)	53 (1346)	24 (610)	70-1/4 (1784)	41-1/4 (1048)	136 x 135 (3454 x 3429)	136 x 147 (3454 x 3734)	72 (1829)	74-1/2 (1892)

Reversible RPDR, RPBR, RPDRF and RPBRF


24	34-1/4 (870)	18 (457)	32 (813)	14 (356)	46-1/4 (1175)	28-1/4 (718)	66 x 63 (1676 x 1600)	66 x 63 (1676 x 1600)	24 (610)	26-1/2 (521)
30	40-1/4 (1022)	20 (508)	34 (864)	14 (356)	51-1/4 (1302)	31-1/4 (794)	74 x 75 (1880 x 1905)	78 x 87 (1981 x 2210)	30 (762)	32-1/2 (826)
36	46-1/4 (1175)	21 (533)	38-1/2 (978)	17-1/2 (445)	55-3/4 (1416)	34-3/4 (883)	76 x 87 (1930 x 2210)	94 x 87 (2388 x 2210)	36 (914)	38-1/2 (978)
42	52-1/4 (1327)	24-1/2 (622)	43 (1092)	18-1/2 (470)	60-1/4 (1530)	35-3/4 (908)	86 x 99 (2184 x 2515)	100 x 99 (2540 x 2515)	42 (1067)	44-1/2 (1130)
48	58-1/4 (1480)	24-1/2 (622)	44 (1118)	19-1/2 (495)	61-1/4 (1556)	36-3/4 (933)	100 x 111 (2540 x 2819)	112 x 111 (2845 x 2819)	48 (1219)	50-1/2 (1283)
54	64-1/4 (1632)	27 (686)	49-1/2 (1257)	22-1/2 (572)	66-3/4 (1695)	39-3/4 (1010)	112 x 111 (2845 x 2819)	124 x 123 (3150 x 3124)	54 (1372)	56-1/2 (1435)
60	70-1/4 (1784)	27 (686)	50-1/2 (1283)	23-1/2 (597)	67-3/4 (1721)	40-3/4 (1035)	124 x 123 (3150 x 3124)	136 x 135 (3454 x 3429)	60 (1524)	62-1/2 (1588)
72	80-1/4 (2038)	29 (737)	53 (1346)	24 (610)	70-1/4 (1784)	41-1/4 (1048)	136 x 135 (3454 x 3429)	136 x 147 (3454 x 3734)	72 (1829)	74-1/2 (1892)

All dimensions shown in inches (millimeters); *square dimensions


Fan Size	Minimum Material Gauges				Fan Panel	Drive Frame Channel	Belt Drive Shaft Size	Max Motor Frame Size		Approximate Weight (lbs)	
	Base		Hood					Belt	Direct	Galv.	Alum.
	Galv.	Alum.	Galv.	Alum.							
Level 1, Models: RBE, RBS and RBF											
20	20	0.080	22	0.40	18	11	3/4	145T	-	195	165
24	20	0.080	22	0.40	18	11	3/4	145T	-	235	200
30	20	0.080	22	0.051	18	11	3/4	184T	-	280	240
36	20	0.080	22	0.051	16	11	3/4	184T	-	320	275
Level 2, Models: RBE, RBS, RBF, RE2 and RS2											
18	20	0.080	22	0.040	18	14	-	-	56	185	160
20	20	0.080	22	0.040	18	11	3/4	145T	145T	210	180
24	20	0.080	22	0.040	18	11	3/4	145T	184T	245	210
30	20	0.080	22	0.051	18	11	1	184T	184T	285	245
36	20	0.080	22	0.051	16	11	1	184T	215T	330	280
42	20	0.080	22	0.051	16	10	1 1/4	184T	256T	450	385
48	20	0.080	22	0.051	16	10	1 1/4	184T	256T	645	550
54	18	0.100	22	0.051	16	10	1 1/4	184T	256T	805	685
60	18	0.100	22	0.051	14	10	1 1/2	215T	-	935	795
Level 3, Models: RBE, RBCE, RBS, RBCS, RBF, RBCF, RCE3 and RCS3											
20	20	0.080	22	0.040	18	11	3/4	-	145T	220	190
24	20	0.080	22	0.040	18	11	3/4	145T	184T	260	225
30	20	0.080	22	0.051	18	11	1	184T	184T	295	250
36	20	0.080	22	0.051	16	11	1	184T	215T	340	290
42	20	0.080	22	0.051	16	10	1 1/2	215T	256T	465	395
48	20	0.080	22	0.051	16	10	1 1/2	215T	256T	670	570
54	18	0.100	22	0.051	16	10	1 1/2	256T	256T	825	705
60	18	0.100	22	0.051	14	10	1 3/4	256T	-	970	825
72	18	0.100	22	0.051	12	10	2	256T	-	1145	970
Reversible, Models: RPDR, RPBR, RPDRF and RPBRF											
24	18	0.064	24	0.040	-	-	-	-	-	260	225
30	18	0.064	24	0.040	-	-	-	-	-	295	250
36	18	0.064	24	0.040	-	-	-	-	-	340	290
42	18	0.080	22	0.051	-	-	-	-	-	465	395
48	18	0.080	22	0.051	-	-	-	-	-	670	570
54	16	0.100	22	0.051	-	-	-	-	-	825	705
60	16	0.100	20	0.051	-	-	-	-	-	970	825
72	16	0.100	20	0.051	-	-	-	-	-	1145	975

Direct Drive Model Number Code

The model number system is designed to completely identify the fan. The correct code letters must be specified to designate direct drive with exhaust or supply air configuration. The remainder of the model number is determined by the size and performance selected from the following pages.

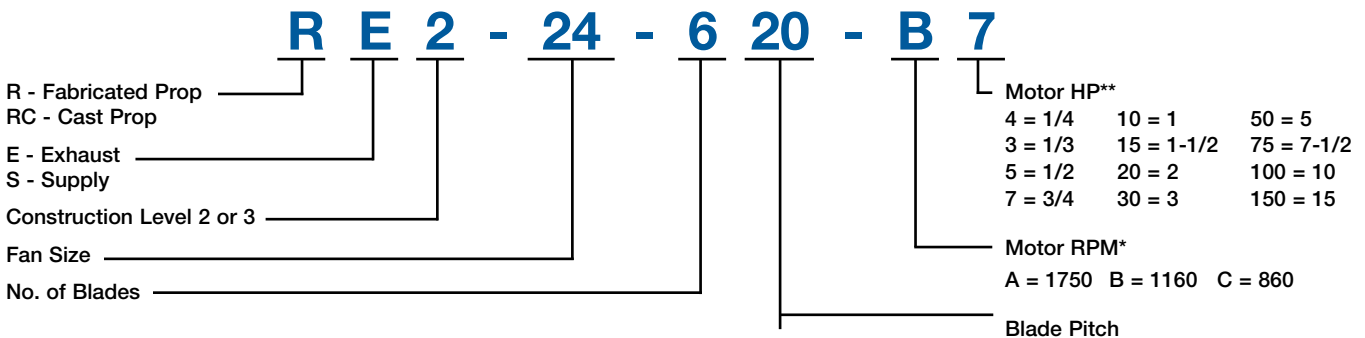

Reversible Model Number Code

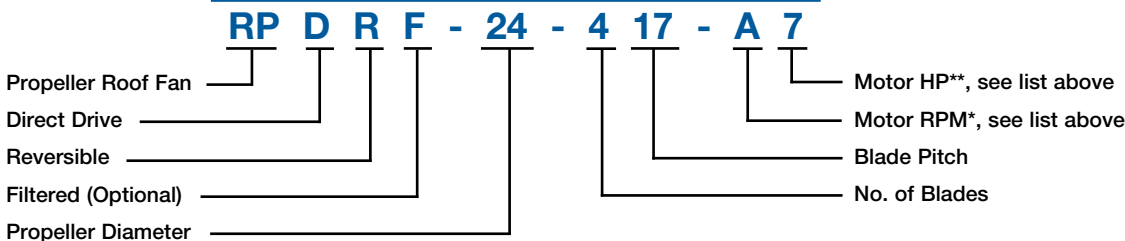

Direct Drive Exhaust

RE2-18—54



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00
RE2 Performance Limits																
RE2-18-423-B6	1/6	1160	0.19	12.9	2742	2414	2323	2232	2041	1822	1597	1177				
RE2-18-432-B4	1/4		0.29	15.0	3116	2825	2739	2632	2416	2203	1983	1549	656			
RE2-18-440-B3	1/3		0.39	16.9	3386	2996	2886	2774	2557	2378	2163	1720				
RE2-18-411-A4	1/4	1750	0.30	22	2901	2688	2628	2567	2450	2333	2216	2027	1707			
RE2-18-415-A3	1/3		0.38	23	3367	3144	3087	3030	2915	2797	2674	2473	2057	1625		
RE2-18-421-A5	1/2		0.58	24	3981	3765	3711	3659	3553	3444	3328	3146	2787	2390	1857	1373
RE2-20-414-B6	1/6	1160	0.20	15.7	3080	2725	2626	2525	2294	1999	1680	1303	781			
RE2-20-421-B4	1/4		0.29	17.9	3645	3244	3140	3034	2785	2500	2253					
RE2-20-427-B3	1/3		0.39	18.9	3970	3574	3474	3359	3089	2809	2558	2126				
RE2-20-404-A4	1/4	1750	0.30	28	3089	2848	2789	2730	2603	2474	2335	2129	1783	1392	1107	
RE2-20-408-A3	1/3		0.40	29	3674	3451	3395	3339	3192	3064	2930	2709	2317	1883	1546	903
RE2-20-412-A5	1/2		0.58	30	4373	4155	4101	4037	3900	3766	3633	3425	3006	2531	1986	1477
RE2-20-418-A7	3/4	1750	0.91	32	5145	4913	4855	4795	4671	4547	4417	4218	3764	3287	2784	1922
RE2-20-424-A10	1		1.17	34	5780	5507	5439	5370	5232	5093	4946	4725	4324	3807	3463	
RE2-20-435-A15	1-1/2		1.87	36	6483	6222	6157	6092	5936	5774	5606	5338	4911	4495	3955	2613
RE2-24-617-C4	1/4	860	0.28	16.7	4535	3976	3811	3631	3192	2684	2144					
RE2-24-621-C3	1/3		0.37	19.6	4958	4380	4209	4033	3657	3154	2589					
RE2-24-631-C5	1/2		0.57	20	5761	5091	4880	4675	4303	3832	3361	2238				
RE2-24-620-B7	3/4	1160	0.83	24	6551	6095	5977	5859	5605	5326	5062	4604	3805			
RE2-24-627-B10	1		1.15	26	7340	6909	6772	6634	6370	6116	5850	5412	4579			
RE2-24-601-A7	3/4		0.80	37	4919	4716	4664	4608	4497	4386	4252	4039	3641	3300	3011	2403
RE2-24-606-A10	1	1750	1.18	40	6559	6338	6283	6228	6107	5974	5841	5631	5227	4799	4350	3497
RE2-24-612-A15	1-1/2		1.72	41	7990	7710	7640	7570	7432	7298	7164	6931	6463	6036	5515	4532
RE2-24-616-A20	2		2.22	42	8958	8723	8665	8606	8489	8355	8210	7991	7598	7157	6658	5501
RE2-30-618-C7	3/4	860	0.86	24	9151	8466	8278	8090	7698	7283	6828	6026	4525	3297		
RE2-30-625-C10	1		1.15	29	10117	9405	9223	9041	8591	8088	7590	6776	4600	3708	2714	
RE2-30-635-C15	1-1/2		1.80	33	11552	10704	10497	10289	9821	9289	8615	7635	5280	4396		
RE2-30-605-B7	3/4	1160	0.88	31	7628	7235	7135	7028	6815	6565	6304	5900	5162	4381	3619	2214
RE2-30-609-B10	1		1.19	31	9129	8716	8612	8503	8286	8069	7803	7378	6637	5731	4753	3241
RE2-30-615-B15	1-1/2		1.80	33	11481	10986	10863	10739	10502	10266	10025	9609	8808	7956	6936	4815
RE2-30-620-B20	2	1160	2.31	34	12763	12327	12219	12110	11885	11552	11219	10706	9843	8931	7789	5540
RE2-36-608-C7	3/4		0.83	28	9860	9164	8969	8775	8357	7916	7431	6714	5296	3823	2471	
RE2-36-612-C10	1		1.18	30	12054	11324	11115	10906	10447	9960	9470	8710	7230	5332	3779	
RE2-36-618-C15	1-1/2	1160	1.70	32	14330	13477	13241	13005	12532	12053	11543	10674	9238	7414	5518	2870
RE2-36-600-B10	1		1.18	35	8001	7528	7397	7244	6942	6663	6380	5949	5216	4615	3929	2501
RE2-36-606-B15	1-1/2		1.79	37	12216	11724	11597	11450	11155	10860	10559	10106	9374	8466	7496	5502
RE2-36-609-B20	2	1160	2.23	39	13970	13475	13352	13228	12959	12677	12395	11915	11057	10069	9136	6883
RE2-36-615-B30	3		3.51	41	17695	17217	17098	16978	16739	16434	16097	15589	14632	13650	12637	10360
RE2-42-602-C10	1	860	1.10	31	8248	7498	7326	7146	6774	6440	6113	5624	4774	3819	2896	
RE2-42-608-C15	1-1/2		1.63	33	13322	12666	12501	12333	11997	11616	11210	10604	9558	8326	7157	4615
RE2-42-612-C20	2		2.30	34	16659	15900	15709	15508	15105	14703	14245	13550	12384	11184	9794	7321
RE2-42-618-C30	3	1160	3.53	38	20833	19931	19704	19458	18964	18471	17975	17215	15982	14526	13096	10298
RE2-42-627-C50	5		5.75	42	24809	24003	23801	23600	23188	22562	21916	20827	19325	17993	16421	12586
RE2-48-405-C15	1-1/2	860	1.69	44	16467	15471	15228	14984	14497	13940	13377	12489	10775	8986	7113	3487
RE2-48-409-C20	2		2.35	46	20499	19443	19185	18930	18422	17854	17274	16341	14660	12904	10993	6665
RE2-48-413-C30	3		3.40	49	24743	23533	23242	22969	22421	21857	21148	20084	18501	16720	14919	10781
RE2-48-421-C50	5	860	5.89	54	30865	29709	29420	29131	28491	27794	27098	26120	24429	22624	20654	16320
RE2-54-409-C50	5		5.54	54	33516	32232	31911	31590	30975	30361	29747	28562	26470	24499	22503	17879
RE2-54-415-C75	7-1/2	860	8.67	55	41470	40161	39834	39507	38758	37868	36978	35722	33672	31561	29317	24635

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.

*Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG												
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00	
RS2 Performance Limits																	
RS2-18-424-B6	1/6	1160	0.19	19.3	2891	2638	2569	2479	2248	1987							
RS2-18-433-B4	1/4		0.28	22	3401	3131	3050	2949	2705	2389	1970						
RS2-18-440-B3	1/3		0.37	23	3779	3515	3345	3184	2870	2514	2139						
RS2-18-412-A4	1/4	1750	0.28	31	3065	2908	2869	2828	2744	2646	2534	2299	1867	1453	1120		
RS2-18-415-A3	1/3		0.38	32	3575	3414	3372	3322	3222	3121	3011	2825	2365	1705	1367		
RS2-18-422-A5	1/2		0.60	33	4191	4010	3965	3921	3838	3755	3672	3476	3060	2486	1933		
RS2-20-416-B6	1/6	1160	0.19	22	3242	2926	2843	2747	2499	2093	1686	1182					
RS2-20-422-B4	1/4		0.29	25	3916	3590	3503	3408	3154	2819	2324						
RS2-20-428-B3	1/3		0.38	26	4426	4065	3956	3845	3553	3217	2721						
RS2-20-405-A4	1/4	1750	0.30	37	3240	3013	2954	2895	2781	2669	2503	2247	1856	1402	1017		
RS2-20-407-A3	1/3		0.38	38	3610	3401	3339	3276	3151	3025	2898	2698	2182	1717	1309		
RS2-20-413-A5	1/2		0.60	40	4572	4384	4337	4289	4168	4047	3929	3759	3267	2666	2041		
RS2-20-419-A7	3/4	1750	0.84	41	5501	5288	5235	5181	5068	4955	4838	4636	4204	3493	2521		
RS2-20-425-A10	1		1.13	43	6322	6081	6021	5961	5844	5727	5603	5360	4882	4223	2858		
RS2-20-436-A15	1-1/2		1.74	45	7281	7060	7005	6950	6797	6590	6384	6078	5478	4613	3190		
RS2-24-618-C4	1/4	860	0.30	19.7	5012	4529	4410	4225	3766	3006	2303	1395					
RS2-24-622-C3	1/3		0.38	23	5548	5060	4930	4747	4237	3498	2597	1486					
RS2-24-633-C5	1/2		0.56	24	6685	6088	5898	5631	4939	4282							
RS2-24-622-B7	3/4	1160	0.90	30	7484	7130	7042	6947	6755	6564	6188	5634	4132	2725			
RS2-24-628-B10	1		1.19	31	8420	8059	7969	7875	7635	7377	6936	6215	4722				
RS2-24-603-A7	3/4		0.88	45	5590	5393	5344	5295	5183	5054	4925	4691	4252	3785	3268	2414	
RS2-24-606-A10	1	1750	1.11	48	6756	6483	6414	6346	6209	6098	6001	5788	5413	4985	4300	3312	
RS2-24-612-A15	1-1/2		1.79	49	8444	8220	8164	8108	7995	7863	7726	7520	7168	6712	6066	4691	
RS2-24-617-A20	2		2.28	50	9766	9571	9522	9473	9375	9278	9180	8988	8573	8124	7622	5925	
RS2-30-619-C7	3/4	860	0.87	29	9970	9435	9295	9143	8840	8429	7901	6696	4374	2697			
RS2-30-625-C10	1		1.18	33	11577	10998	10827	10653	10305	9897	9394	8224	5457	3057			
RS2-30-635-C15	1-1/2		1.79	37	13519	12942	12793	12586	12173	11650	10817	9403	5733				
RS2-30-605-B7	3/4	1160	0.87	36	8004	7540	7435	7332	7126	6902	6673	6233	5354	4407	3352	1580	
RS2-30-609-B10	1		1.14	37	9179	8819	8729	8639	8428	8195	7961	7599	6750	5625	4593	2558	
RS2-30-616-B15	1-1/2		1.77	38	12118	11712	11610	11509	11290	11054	10818	10434	9776	8376	6930	4186	
RS2-30-621-B20	2	1160	2.37	40	14207	13783	13676	13570	13357	13134	12912	12578	11654	10472	8760	5010	
RS2-36-608-C7	3/4		0.87	31	10368	9770	9600	9429	9075	8655	8115	7149	5418	3563	2147		
RS2-36-613-C10	1		1.20	35	12782	12206	12062	11918	11564	11197	10688	9697	7557	5309	3431		
RS2-36-619-C15	1-1/2	1160	1.77	35	15784	15145	14985	14825	14447	14067	13552	12421	10134				
RS2-36-605-B15	1-1/2		1.75	41	12229	11775	11661	11547	11259	10962	10667	10228	9282	8226	7132	4819	
RS2-36-609-B20	2		2.29	45	14617	14216	14116	14016	13791	13527	13264	12865	12081	10911	9590	6806	
RS2-36-615-B30	3	860	3.39	47	18477	18083	17984	17885	17688	17491	17273	16871	16101	15051	13502	10029	
RS2-42-604-C10	1		1.16	34	10410	9823	9634	9429	9028	8661	8297	7759	6722	5524	4352	1892	
RS2-42-609-C15	1-1/2		1.73	37	14918	14214	14034	13846	13472	13068	12633	11992	10917	9514	8123	4949	
RS2-42-613-C20	2	860	2.37	38	18043	17419	17263	17107	16759	16391	16008	15173	13993	12440	10921	7062	
RS2-42-619-C30	3		3.54	40	22564	21911	21747	21584	21224	20822	20419	19797	18338	16086	14475	10641	
RS2-42-628-C50	5		5.58	44	28326	27511	27307	27104	26702	26309	25916	25326	22814	20699	18517	13889	
RS2-48-406-C15	1-1/2	860	1.70	48	17653	16860	16662	16434	15581	15003	14426	13452	11664	9604	7461	3219	
RS2-48-409-C20	2		2.26	50	21078	20184	19961	19671	19079	18489	17903	16873	14822	12789	10588	6065	
RS2-48-413-C30	3		3.34	54	26137	25150	24903	24644	24095	23547	22998	21787	19847	17768	15750	9811	
RS2-48-421-C50	5		5.87	57	34260	33175	32904	32633	32087	31474	30860	29847	27391	25101	22890	16888	
RS2-54-410-C50	5	860	5.90	58	36501	35366	35082	34798	34221	33593	32965	32024	30461	28032	25102	19450	
RS2-54-415-C75	7-1/2		8.48	59	44221	43095	42813	42532	41969	41406	40758	39766	37897	35653	32852	27125	

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG												
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00	
RPDR Performance Limits																	
RPDR-24-625-C4	1/4	870	0.25	18.4	4562	3760											
RPDR-24-632-C3	1/3		0.35	13.1	5200	4035	3655	3216	2503								
RPDR-24-421-B3	1/3	1160	0.35	27	5069	4492	4324	4153	3575	2962							
RPDR-24-429-B5	1/2		0.56	28	6062	5389	5164	4921	4092	3372							
RPDR-24-623-B5			0.56	26	5765	5300	5173	5020	4555	4097							
RPDR-24-632-B7	3/4		0.83	24	6933	6334	6165	5996	5149	4513	3700	3227					
RPDR-24-417-A7	3/4		0.87	48	6476	6150	6068	5978	5799	5619	5363	4978	4104				
RPDR-24-421-A10	1	1750	1.16	53	7647	7298	7206	7101	6892	6680	6453	6051	4994				
RPDR-24-428-A15	1-1/2		1.79	55	8981	8566	8462	8347	8108	7859	7553	6998	5650				
RPDR-24-622-A15			1.80	52	8459	8169	8096	8024	7869	7709	7548	7177	6426				
RPDR-24-432-A20	2		2.08	57	9462	8965	8853	8742	8512	8236	7943	7270	5732				
RPDR-24-625-A20			2.10	55	9177	8864	8786	8708	8538	8354	8170	7752	6927				
RPDR-30-618-C5	1/2	870			7801	6997	6741	6426	5603	4578	3485	2076					
RPDR-30-625-C7	3/4		0.75	28	9293	8298	7998	7692	6562	5237	4267						
RPDR-30-410-B5	1/2	1160	0.55	30	7219	6498	6308	6096	5621	5004	4139	2889					
RPDR-30-416-B7	3/4		0.83	36	9029	8257	8052	7836	7352	6751	5772	4080					
RPDR-30-617-B10	1		1.18	53	10105	9540	9381	9217	8891	8450	7888	6985	4932				
RPDR-30-625-B15	1-1/2		1.79	44	12391	11716	11522	11305	10868	10409	9843	8328	6174	4161			
RPDR-30-630-B20	2		2.19	48	13345	12620	12411	12172	11691	11135	10352	8202	5895				
RPDR-30-405-A10	1	1750	1.08	57	8271	7738	7621	7503	7255	6969	6684	6308					
RPDR-30-410-A15	1-1/2		1.80	64	10890	10424	10308	10188	9940	9692	9429	9008	8175	6901	5197		
RPDR-30-414-A20	2		2.29	69	12763	12291	12173	12049	11782	11515	11249	10808					
RPDR-30-420-A30	3		3.40	81	15185	14639	14503	14367	14091	13813	13535	13043					
RPDR-30-623-A50	5		5.53	97	17853	17431	17326	17220	17009	16796	16537	16147	15447	14670	13473	10345	
RPDR-36-410-C5	1/2	870	0.56	26	9299	7900	7569	7144	5751								
RPDR-36-611-C7	3/4		0.78	30	10555	9479	9216	8945	8315								
RPDR-36-617-C10	1		1.18	36	12506	11442	11138	10824	10129	8613	6952	5276					
RPDR-36-625-C15	1-1/2		1.77	45	14569	13180	12821	12391	11104	8909	7581	5713					
RPDR-36-409-B10	1		1.22	42	11904	10843	10577	10319	9810	9210	8464	6474					
RPDR-36-605-B10		1.17	47	10869	10079	9866	9654	9235	8811	8339	7260	5274					
RPDR-36-610-B15	1-1/2	1160	1.72	51	13614	12775	12584	12393	12011	11614	11218	10457					
RPDR-36-614-B20	2	2.32	56	15450	14659	14459	14258	13858	13444	13005	12171	9283					
RPDR-36-620-B30	3	3.17	69	17821	17120	16945	16740	16202	15664	15088	13982	10505					


Performance shown is for Model RPDR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	
RPDR Performance Limits																
RPDR-42-609-C10	1	870	1.21	43	14217	12909	12562	12204	11435	10354	8889	6836				
RPDR-42-613-C15	1-1/2		1.76	43	17100	15685	15307	14927	14120	13055	11451	9248	5983			
RPDR-42-618-C20	2		2.06	48	19782	18231	17820	17409	16323	15126	13430	11066				
RPDR-42-625-C30	3		3.30	55	21556	19467	19083	18698	17665	15743	14280	12748	10019			
RPDR-42-402-B10	1	1160	1.15	67	9651	8301	7827	7494	6750	5485	4541					
RPDR-42-405-B15	1-1/2		1.44	60	13631	12360	12040	11687	10941	10140	8970	7206				
RPDR-42-608-B20	2		2.42	71	17765	16812	16569	16311	15796	15260	14718	13724	11285			
RPDR-42-613-B30	3		3.66	73	22800	21739	21473	21208	20663	20093	19514	18586	16122	13175	10783	
RPDR-42-620-B50	5		5.42	87	27581	26356	26050	25738	25112	24419	23467	22144	19658	16427		
RPDR-42-627-B75	7-1/2		7.90	106	29289	27799	27398	26996	26241	25583	24925	23206				
RPDR-48-404-C7	3/4	870	0.86	37	12326	10408	9882	9227	7081	5552						
RPDR-48-407-C10	1		1.16	44	15460	13608	13081	12554	11153	8810	7026					
RPDR-48-411-C15	1-1/2		1.6	44	19017	17100	16617	16087	14886	13357	10947					
RPDR-48-611-C20	2		2.35	48	20781	19392	19033	18675	17863	16899	15599	12798	9166			
RPDR-48-616-C30	3		3.3	52	24740	23208	22835	22463	21716	20716	19576	17210	12510			
RPDR-48-625-C50	5		5.44	63	29935	28122	27670	27219	26306	25209	23983	21365	16034			
RPDR-48-630-C75	7-1/2		6.84	68	31440	29556	29089	28626	27687	26513	24967	20339	16291			
RPDR-48-402-B15	1-1/2		1.7	58	13075	11690	11330	10937	10015	8892	7495	5720				
RPDR-48-405-B20	2	2.24	72	18115	16674	16335	15996	15231	14412	13419	10766	7692				
RPDR-48-409-B30	3	3.22	71	23111	21700	21357	21013	20315	19537	18755	17254	13165				
RPDR-48-612-B50	5	5.81	84	28807	27732	27464	27195	26661	26126	25591	24613	22560	19581			
RPDR-48-618-B75	7-1/2	8.49	99	34759	33596	33305	33014	32426	31829	31233	30299	28412	25974			
RPDR-48-624-B100	10	11.4	90	39237	37922	37594	37265	36602	35930	35258	34192	32145				
RPDR-54-408-C30	3	870	3.27	58	23998	21915	21371	20987	20300	19383	17956	16148	12532			
RPDR-54-415-C50	5		5.23	70	32838	31114	30648	30182	29249	28189	27059	25422	22179			
RPDR-54-422-C75	7-1/2		8.47	75	40692	38668	38211	37755	36841	35888	34745	32728	28582			
RPDR-54-617-C75			8.18	81	38959	37368	36977	36605	35860	35115	34153	32712	30409			
RPDR-54-622-C100	10		11.36	100	44846	43262	42867	42456	41606	40756	39817	38281	35163	32619	29704	


Performance shown is for Model RPDR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Numbers in blue have a larger BHP and require the next largest size motor.

The model number system is designed to completely identify the fan. The correct code letters must be specified to designate belt drive with exhaust, supply or filtered supply air configuration. The remainder of the model number is determined by the size and performance selected from the following pages.

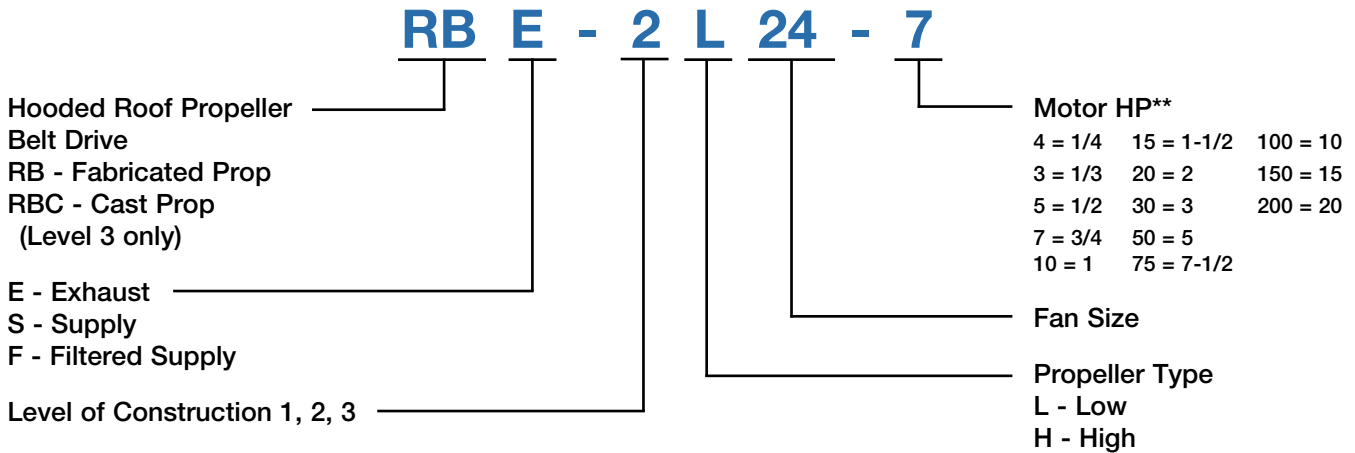

Reversible Model Number Code

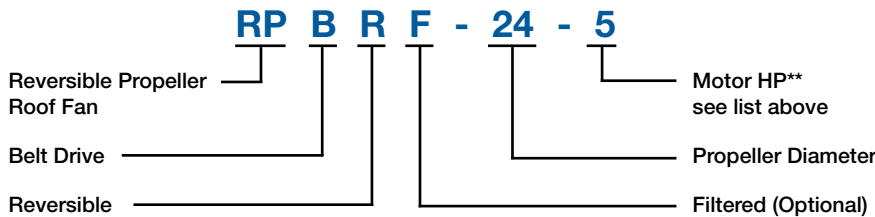

Using The Performance Table

Shown below is a portion of a typical performance table used in this catalog. Performance data shown offers the best selections for each propeller type (“L” or “H”) relative to sound, RPM and static pressure.

Consider “L” type propellers first for most applications.

When using the performance tables, look first at the “L” selections, because they offer the lowest speed and sound levels. Many applications can be met with the “L” type propeller.

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG												
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00	
Level 1 Performance					Max RPM		L - 696		H - 895		Max Motor Frame Size - 56					TS = RPM x 7.854	
RBE-L30-4	1/4	382	0.15	9.9	5454												
		449	0.25	11.4	6411	4506	3791										
		476	0.30	12.1	6797	5144	4417	3784									
RBE-H30-4	1/4	493	0.15	11.4	4802	3487	3001	2317									
		579	0.25	14.1	5639	4576	4285	3917	2793	2366							
		617	0.30	16.0	6010	5022	4754	4455	3686	2783							

“L” type low pressure propeller

“H” type high pressure propeller

Shows level of construction based on fan RPM and motor frame size. See performance pages.

Note that each max. BHP is cataloged at a 1.0 and 1.2 service factor. See Basics of Fan Selection.

Optimum selection range for the “L” type propeller.

Optimum selection range for the “H” type propeller.

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG															
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00				
Level 1 Performance		Max RPM	L - 1025	H - 1348	Max Motor Frame Size - 145T						TS = RPM x 5.235									
RBE-1L20-4	1/4	653	0.16	11.2	2883	2284	2043													
		768	0.25	12.7	3390	2932	2796	2589												
		817	0.31	13.4	3607	3177	3059	2908	2523											
RBE-1H20-4	1/4	856	0.15	16.9	2550	2176	2077	1976	1744	1341										
		1007	0.25	18.1	2999	2687	2606	2521	2351	2168	1844	1442								
		1075	0.30	18.7	3202	2908	2836	2758	2599	2439	2253	1767								
RBE-1L20-3	1/3	845	0.34	13.8	3730	3314	3206	3085	2712											
		894	0.40	14.6	3947	3553	3456	3346	3037	2687										
RBE-1H20-3	1/3	1117	0.33	19.3	3327	3044	2975	2902	2749	2595	2434	1992								
		1175	0.40	20	3500	3230	3164	3098	2954	2808	2661	2400	1725							
RBE-1L20-5	1/2	963	0.50	15.7	4251	3885	3795	3704	3483	3154										
		1025	0.60	16.9	4525	4180	4095	4010	3825	3562	3255									
RBE-1H20-5	1/2	1284	0.50	22	3824	3577	3516	3456	3331	3198	3065	2863	2253							
		1348	0.60	24	4015	3778	3721	3664	3549	3422	3296	3104	2733	2094						
Level 2 Performance		Max RPM	L - 1171	H - 1550	Max Motor Frame Size - 145T						TS = RPM x 5.235									
RBE-2L20-5	1/2	963	0.50	15.7	4251	3885	3795	3704	3483	3154	2830	2244	1498							
		1025	0.60	16.9	4525	4180	4095	4010	3825	3562	3255	2794	1941							
RBE-2H20-5	1/2	1284	0.50	22	3824	3577	3516	3456	3331	3198	3065	2863	2253							
		1348	0.60	24	4015	3778	3721	3664	3549	3422	3296	3104	2733	2094						
RBE-2L20-7	3/4	1102	0.75	18.7	4865	4543	4464	4385	4228	4042	3767	3340	2482	1863						
		1171	0.90	21	5169	4866	4791	4717	4569	4409	4212	3807	3135	2341	1759					
RBE-2H20-7	3/4	1451	0.75	27	4322	4101	4048	3994	3888	3777	3660	3482	3181	2643	2170					
		1550	0.90	31	4617	4410	4359	4309	4209	4109	4002	3837	3560	3244	2638					

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Exhaust RBE-24



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG														
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00			
Level 1 Performance		Max RPM	L - 809	H - 1152	Max Motor Frame Size - 145T						TS = RPM x 6.283								
RBE-1L24-4	1/4	493	0.15	11.1	3911	2832	2512												
		579	0.25	12.1	4594	3740	3480	3181											
		616	0.30	12.6	4887	4116	3864	3608	3095										
RBE-1H24-4	1/4	728	0.15	12.1	3417	2825	2661	2491											
		856	0.25	15.4	4018	3552	3403	3254	2976	2643									
		909	0.30	16.7	4266	3836	3705	3562	3296	3014	2611								
RBE-1L24-3	1/3	635	0.33	12.9	5038	4308	4057	3820	3302										
		678	0.40	13.6	5379	4736	4492	4265	3783	3342									
RBE-1H24-3	1/3	939	0.33	17.2	4407	3995	3873	3735	3472	3210	2908								
		1001	0.40	19.2	4698	4321	4207	4088	3830	3594	3336	2766							
RBE-1L24-5	1/2	730	0.50	14.6	5792	5214	5017	4791	4377	3907	3519								
		775	0.60	15.7	6149	5604	5461	5249	4844	4426	4015								
RBE-1H24-5	1/2	1080	0.50	22	5069	4732	4626	4520	4288	4057	3839	3469							
		1152	0.60	29	5407	5101	5003	4904	4698	4473	4264	3945							
RBE-1L24-7	3/4	809	0.68	16.6	6418	5895	5767	5588	5191	4813	4383								
Level 2 Performance		Max RPM	L - 888	H - 1311	Max Motor Frame Size - 145T						TS = RPM x 6.283								
RBE-2L24-5	1/2	730	0.50	14.6	5792	5214	5017	4791	4377	3907	3519	2606							
		775	0.60	15.7	6149	5604	5461	5249	4844	4426	4015	3266	2073						
RBE-2H24-5	1/2	1080	0.60	22	5069	4732	4626	4520	4288	4057	3839	3469	2633	1963					
		1152	0.60	29	5407	5101	5003	4904	4698	4473	4264	3945	3155	2556	1872				
RBE-2L24-7	3/4	835	0.75	17.2	6625	6117	5993	5845	5452	5091	4687	4144	2914						
		888	0.90	19.2	7045	6567	6450	6333	5991	5636	5293	4721	3650	2683					
RBE-2H24-7	3/4	1235	0.84	31	5796	5511	5432	5340	5155	4952	4742	4456	3925	3132	2603				
		1311	0.90	34	6153	5884	5817	5734	5560	5383	5184	4901	4430	3759	3144	1986			
Level 3 Performance		Max RPM	L - 1278	H - 1461	Max Motor Frame Size - 145T						TS = RPM x 6.283								
RBE-3L24-7	3/4	952	0.50	18.6	5460	5020	4907	4793	4577	4279	3934								
		1094	0.75	23	6274	5895	5797	5698	5501	5313	5075	4661							
		1161	0.90	24	6658	6303	6210	6117	5931	5750	5571	5202	4385						
RBE-3H24-7	3/4	1087	0.53	19.4	5222	4787	4670	4554	4326	4083	3830	3329	2272	1768					
		1249	0.78	23	6001	5631	5529	5427	5225	5027	4819	4501	3779	2734	2295				
		1327	0.90	25	6375	6031	5936	5840	5648	5461	5274	4975	4432	3493	2758				
RBE-3L24-10	1	1203	1.00	25	6899	6558	6468	6378	6199	6020	5850	5522	4830						
		1278	1.20	26	7329	7010	6926	6841	6672	6503	6338	6082	5502	4640					
RBE-3H24-10	1	1375	1.07	26	6606	6273	6185	6093	5907	5725	5545	5261	4756	3995	3034	2236			
		1461	1.20	29	7019	6706	6628	6541	6367	6193	6023	5766	5313	4800	3901	2764			

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Exhaust RBE-30

Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG															
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00				
Level 1 Performance		Max RPM	L - 696	H - 895	Max Motor Frame Size - 184T							TS = RPM x 7.854								
RBE-1L30-4	1/4	382	0.15	9.9	5454														CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.	
		449	0.25	11.4	6411	4506	3791													
		476	0.30	12.1	6797	5144	4417	3784												
RBE-1H30-4	1/4	493	0.15	11.4	4802	3487	3001	2317												
		579	0.25	14.1	5639	4576	4285	3917	2793	2366										
		617	0.30	16.0	6010	5022	4754	4455	3686	2783										
RBE-1L30-3	1/3	491	0.33	12.5	7011	5487	4778	4133												
		523	0.40	13.5	7468	6053	5536	4877												
RBE-1H30-3	1/3	634	0.33	16.3	6175	5218	4958	4691	3968	2965	2589									
		682	0.40	19.2	6643	5762	5524	5281	4716	3947	3115									
RBE-1L30-5	1/2	563	0.50	14.8	8039	6744	6385	5830	4681											
		599	0.60	15.9	8553	7350	7016	6672	5512											
RBE-1H30-5	1/2	733	0.50	20	7139	6329	6109	5886	5429	4829	3992	3163								
		780	0.60	22	7597	6844	6638	6431	6008	5520	4917	3669								
RBE-1L30-7	3/4	646	0.75	17.8	9224	8125	7820	7509	6634	5613										
		686	0.90	19.4	9795	8773	8488	8199	7573	6556	5651									
RBE-1H30-7	3/4	836	0.75	24	8143	7445	7258	7065	6675	6279	5786	4851	3537							
		895	0.90	23	8717	8072	7899	7722	7361	6992	6611	5871	4176							
RBE-1L30-10	1	696	0.95	19.8	9938	8931	8653	8370	7789	6795	5882									
Level 2 Performance		Max RPM	L - 864	H - 1125	Max Motor Frame Size - 184T							TS = RPM x 7.854								
RBE-2L30-7	3/4	646	0.75	17.8	9224	8125	7820	7509	6634	5613	4748	3597								
		686	0.90	19.4	9795	8773	8488	8199	7573	6556	5651	4512								
RBE-2H30-7	3/4	836	0.83	24	8143	7445	7258	7065	6675	6279	5786	4851	3537	2808	1877					
		895	0.90	23	8717	8072	7899	7722	7361	6992	6611	5871	4176	3510	2772					
RBE-2L30-10	1	710	1.00	20	10138	9152	8884	8606	8038	7127	6203	5042	3158							
		754	1.20	22	10766	9841	9601	9340	8810	8166	7243	6015	4342							
RBE-2H30-10	1	915	1.09	22	8912	8283	8114	7942	7589	7230	6869	6187	4404	3736	3065					
		980	1.16	25	9545	8965	8807	8648	8322	7992	7655	7106	5902	4449	3840	2395				
RBE-2L30-15	1 1/2	813	1.51	25	11608	10755	10534	10307	9822	9326	8642	7371	5672	4110						
		864	1.81	28	12337	11537	11329	11121	10675	10214	9746	8597	6789	5337	3697					
RBE-2H30-15	1-1/2	1063	1.69	29	10354	9827	9681	9535	9242	8938	8633	8166	7237	5881	4760	3632				
		1125	1.80	34	10958	10462	10329	10191	9915	9632	9345	8907	8114	7084	5500	4359				
Level 3 Performance		Max RPM	L - 996	H - 1239	Max Motor Frame Size - 184T							TS = RPM x 7.854								
RBE-3L30-15	1-1/2	817	1.00	23	9566	8908	8744	8548	8144	7739	7294	6182	4166	3210						
		938	1.50	28	10982	10410	10267	10123	9798	9446	9094	8537	7045	4976	4222					
		996	1.80	30	11661	11122	10987	10852	10573	10241	9910	9412	8026	6430	5042	3449				
RBE-3H30-15	1-1/2	923	1.01	24	9638	8982	8816	8650	8279	7892	7481	6880	5837	4622	3377					
		1060	1.52	29	11069	10500	10356	10211	9921	9600	9264	8739	7864	6963	5956	3785				
		1125	1.80	31	11748	11213	11077	10940	10668	10388	10072	9595	8755	7947	7063	5049				
RBE-3H30-20	2	1168	2.00	33	12197	11681	11551	11420	11157	10895	10599	10143	9339	8554	7733	5855				
		1239	2.41	36	12938	12452	12331	12207	11960	11712	11459	11029	10290	9534	8799	7147				

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Exhaust RBE-36



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG															
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00				
Level 1 Performance		Max RPM	L - 551	H - 679	Max Motor Frame Size - 184T						TS = RPM x 9.424									
RBE-1L36-3	1/3	326	0.25	11.1	8055	5191														CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.
		358	0.33	11.0	8846	6334	5591													
		382	0.40	11.4	9439	7135	6430	5787												
RBE-1H36-3	1/3	403	0.25	8.3	7760	5632	4935	4069												
		442	0.33	9.6	8511	6597	6072	5422	3682											
		472	0.40	10.6	9089	7300	6832	6303	4991	3516										
RBE-1L36-5	1/2	411	0.50	12.5	10155	8027	7458	6773												
		437	0.60	13.5	10798	8807	8285	7706	6544											
RBE-1H36-5	1/2	508	0.50	11.6	9782	8078	7710	7260	6190	4514	3600									
		540	0.60	12.6	10399	8757	8429	8047	7133	6003	4474									
RBE-1L36-7	3/4	471	0.75	14.4	11638	9806	9321	8836	7690	6720										
		500	0.90	15.3	12354	10641	10185	9728	8735	7698										
RBE-1H36-7	3/4	582	0.75	14.8	11207	9636	9331	9026	8268	7339	6248	4413								
		617	0.90	15.9	11881	10364	10070	9783	9133	8357	7426	5354								
RBE-1L36-10	1	518	1.00	16.1	12799	11153	10713	10272	9368	8290	7431									
		551	1.21	17.7	13614	12080	11667	11254	10425	9480	8542									
RBE-1H36-10	1	640	1.00	17.1	12324	10842	10551	10274	9691	8975	8112	6600								
		679	1.20	19.2	13075	11644	11361	11096	10574	9946	9244	7949	5287							
Level 2 Performance		Max RPM	L - 693	H - 856	Max Motor Frame Size - 184T						TS = RPM x 9.424									
RBE-2L36-10	1	518	1.00	16.1	12799	11153	10713	10272	9368	8290	7431	5096								
		550	1.20	17.6	13590	12053	11638	11224	10394	9445	8509	6827	3401							
RBE-2H36-10	1	640	1.00	17.1	12324	10842	10551	10274	9691	8975	8112	6600								
		679	1.20	19.2	13075	11644	11361	11096	10574	9946	9244	7949	5287							
RBE-2L36-15	1-1/2	593	1.51	20	14652	13225	12860	12476	11707	10937	10005	8780	5624							
		630	1.81	22	15566	14216	13894	13534	12811	12086	11319	10009	7555	4590						
RBE-2H36-15	1-1/2	732	1.50	22	14096	12724	12461	12199	11714	11229	10604	9552	7203	5161						
		778	1.81	26	14982	13651	13404	13157	12686	12230	11728	10845	8976	6420						
RBE-2L36-20	2	652	2.00	24	16110	14801	14490	14155	13457	12757	12056	10788	8961	5723						
		693	2.40	27	17123	15884	15591	15298	14644	13986	13327	12256	10416	7791	5177					
RBE-2H36-20	2	806	2.01	28	15521	14213	13974	13736	13272	12832	12392	11548	9871	7307	5769					
		856	2.40	34	16484	15209	14985	14760	14311	13893	13479	12777	11342	9566	7133					
Level 3 Performance		Max RPM	L - 922	H - 1357	Max Motor Frame Size - 184T						TS = RPM x 9.424									
RBE-3L36-20	2	689	1.57	23	14330	13423	13184	12942	12445	11898	11193	9948	7624	5080	3792					
		757	2.00	26	15744	14919	14712	14492	14053	13588	13090	12113	10014	8009	5630					
		805	2.40	29	16743	15966	15772	15574	15160	14747	14288	13542	11835	9788	6994	4634				
RBE-3H36-20	2	857	1.51	27	13552	12869	12698	12532	12187	11600	11140	10354	8812	6740	4949					
		941	2.00	32	14880	14258	14102	13947	13644	13287	12752	12134	10784	9369	7449					
		1000	2.40	34	15813	15228	15081	14935	14647	14361	13942	13231	12213	10883	9382	5957				
RBE-3L36-30	3	866	3.00	33	18011	17290	17109	16929	16551	16167	15781	15128	13741	11945	10171	6265				
		922	3.61	37	19176	18498	18329	18159	17814	17453	17092	16516	15416	13927	12092	7865				
RBE-3H36-30	3	1077	3.00	38	17031	16487	16351	16215	15944	15679	15414	14763	13832	12634	11499	8313				
		1144	3.60	41	18090	17578	17450	17322	17066	16815	16565	16105	15080	14291	13018	10499				
RBE-3H36-50	5	1277	5.00	49	20194	19735	19620	19506	19276	19047	18821	18485	17719	16823	16146	14042				
		1357	6.01	55	21459	21027	20919	20811	20595	20380	20164	19848	19309	18381	17651	15848				

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Exhaust RBE-72



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG														
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25	1.50			
Level 3 Performance		Max RPM	L - 508	H - 530	Max Motor Frame Size - 256T						TS = RPM x 18.802								
RBE-3L72-20	2	223	1.6	16.4	36120	28338	25951	18327	13349										
		245	2.01	18.6	39684	32769	30791	23682	19643	8142									
		261	2.41	20	42275	35821	34064	27764	22914	12416									
RBE-3H72-20	2	266	1.53	16.6	32832	27962	26612	21777	17274										
		292	2.02	19	36042	31687	30478	26666	23225										
		310	2.41	21	38263	34232	33080	29545	26840	16096									
RBE-3L72-30	3	280	3.11	23	45353	39381	37804	32337	28109	18519									
		297	3.61	25	48107	42515	41029	36254	32309	23453	12879								
RBE-3H72-30	3	334	3.02	23	41226	37577	36497	33283	31028	23252									
		355	3.63	25	43818	40468	39451	36447	34355	27879	17579								
RBE-3L72-50	5	332	5.48	29	53776	48853	47523	43463	40522	31480	24068	14381							
		353	6	31	57177	52563	51345	47594	44890	36937	29057	21236	13105						
RBE-3H72-50	5	396	5.03	30	48878	46017	45121	42399	40616	35891	29151	19316							
		420	6.01	32	51841	49143	48392	45814	44127	39746	34315	27129							
RBE-3L72-75	7-1/2	380	7.98	33	61550	57281	56182	52710	50365	43472	35429	29582	21117						
		403	9.01	35	65276	61264	60229	56993	54803	48851	41508	34102	28368	14011					
RBE-3H72-75	7-1/2	453	7.54	36	55914	53413	52787	50454	48867	44905	40749	34841	27475						
		481	9.02	40	59370	57014	56425	54338	52837	49153	45263	40639	34817						
RBE-3L72-100	10	418	11.01	37	67706	63847	62849	59755	57643	52013	45200	37717	32765	17620					
		445	12.1	41	72079	68466	67534	64673	62689	57568	51667	45017	38036	26379	14297				
RBE-3H72-100	10	498	10.02	43	61468	59193	58624	56676	55226	51655	47951	43965	38550	23339					
		530	12.1	49	65418	63280	62746	61040	59678	56300	52917	49364	45127	33918					
RBE-3L72-150	15	479	16.2	46	77586	74230	73385	70771	68941	64334	59295	53357	47095	36917	23487				
		508	18	52	82283	79119	78328	75876	74199	69854	65283	60221	54396	42796	32808	20643			
RBE-3H72-150	15	570	15	54	70355	68367	67870	66379	65174	62008	58907	55677	52373	43416	30699				
		606	18	59	74799	72929	72461	71059	70066	67088	64146	61218	58111	50925	41596	27100			

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Cast Aluminum Exhaust

RBCE-24—36



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG												
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00	
24 Performance		Max RPM H - 1605			Max Motor Frame Size - 145T						TS = RPM x 6.283						
RBCE-3H24-3	1/3	830	0.25	12.4	4483	3870	3719	3546	3133	2625	1585	1038					
		912	0.33	14.4	4926	4366	4230	4093	3757	3377	2905	1657	827				
		972	0.40	15.8	5250	4729	4593	4469	4186	3844	3472	2335	1305				
RBCE-3H24-5	1/2	1048	0.50	16.8	5661	5183	5053	4930	4692	4408	4083	3527	1876	1154			
		1113	0.60	17.7	6012	5560	5445	5323	5103	4857	4572	4104	2494	1661	980		
RBCE-3H24-7	3/4	1199	0.75	19.6	6476	6052	5955	5843	5626	5425	5185	4773	3970	2296	1664		
		1274	0.90	22	6882	6478	6386	6291	6078	5887	5684	5329	4650	3733	2228	1040	
RBCE-3H24-10	1	1320	1.00	23	7130	6738	6650	6561	6358	6166	5984	5658	5014	4233	2562	1415	
		1402	1.20	26	7573	7199	7116	7033	6852	6659	6487	6207	5642	5003	4159	2056	
RBCE-3H24-15	1-1/2	1511	1.50	31	8162	7809	7732	7654	7500	7321	7146	6908	6444	5880	5255	2863	
		1605	1.80	37	8669	8332	8259	8187	8041	7885	7716	7481	7075	6588	6049	4420	
30 Performance		Max RPM H - 1476			Max Motor Frame Size - 184T						TS = RPM x 7.854						
RBCE-3H30-5	1/2	665	0.33	12	6533	5397	5067	4701	3942	2621	1861						
		764	0.50	14.1	7506	6535	6281	5993	5375	4754	3587	2441					
		812	0.60	15.4	7978	7067	6832	6580	6024	5431	4786	3173					
RBCE-3H30-7	3/4	875	0.75	17.4	8597	7756	7538	7320	6831	6294	5747	4777	2707				
		930	0.90	19.3	9137	8350	8144	7940	7506	7029	6505	5730	3550	2041			
RBCE-3H30-10	1	963	1.00	21	9461	8704	8505	8307	7904	7448	6955	6210	4039	2753			
		1023	1.20	22	10051	9342	9155	8968	8596	8188	7756	7044	5739	3716	2328		
RBCE-3H30-15	1-1/2	1102	1.50	24	10827	10175	10002	9828	9481	9136	8741	8117	7030	5146	3786		
		1171	1.80	25	11505	10897	10733	10570	10243	9918	9579	9016	7993	6890	4823	2464	
RBCE-3H30-20	2	1213	2.00	27	11917	11334	11176	11018	10702	10388	10075	9538	8568	7588	5887	3373	
		1289	2.40	30	12664	12116	11972	11824	11526	11230	10935	10466	9594	8658	7655	4625	
RBCE-3H30-30	3	1389	3.00	36	13647	13138	13011	12874	12598	12323	12048	11637	10869	10026	9164	6298	
		1476	3.61	41	14501	14023	13903	13781	13522	13262	13003	12616	11935	11188	10361	8625	
36 Performance		Max RPM H - 1591			Max Motor Frame Size - 184T						TS = RPM x 9.424						
RBCE-3H36-7	3/4	693	0.50	17.1	9832	8385	7982	7550	6708	5725	4048						
		796	0.75	20	11293	10056	9727	9381	8642	7914	7112	5487					
		845	0.90	22	11988	10829	10526	10207	9532	8837	8142	6925					
RBCE-3H36-10	1	876	1.00	23	12428	11313	11021	10722	10086	9408	8747	7636					
		930	1.20	25	13194	12148	11876	11600	11017	10391	9761	8811	6671				
RBCE-3H36-15	1-1/2	1002	1.50	27	14216	13249	12999	12745	12223	11674	11079	10209	8601	5925			
		1065	1.80	30	15110	14204	13969	13733	13252	12743	12213	11378	9998	8226			
RBCE-3H36-20	2	1103	2.00	31	15649	14777	14550	14322	13860	13379	12880	12071	10749	9220	6745		
		1172	2.40	33	16628	15812	15598	15384	14953	14516	14049	13320	12069	10781	9173		
RBCE-3H36-30	3	1263	3.01	37	17919	17168	16969	16771	16374	15970	15562	14908	13743	12598	11344	7283	
		1342	3.61	40	19040	18338	18151	17964	17591	17215	16833	16238	15178	14083	12990	10251	
RBCE-3H36-50	5	1497	5.01	45	21239	20612	20452	20285	19950	19615	19280	18766	17868	16909	15923	13956	
		1591	6.01	50	22572	21982	21835	21681	21366	21050	20735	20257	19438	18573	17639	15808	

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Cast Aluminum Exhaust

RBCE-42—72



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25	1.50
42 Performance					Max RPM H - 1238			Max Motor Frame Size - 215T					TS = RPM x 10.995			
RBCE-3H42-10	1	620	0.75	17.3	13701	11858	11361	9776	8517	4001						
		681	1.00	19.7	15049	13395	12945	11579	10554	7347						
		724	1.20	22	15999	14447	14040	12760	11868	9118	5073					
RBCE-3H42-15	1-1/2	780	1.50	24	17237	15800	15434	14258	13461	11155	8145	4001				
		830	1.80	27	18342	16995	16651	15565	14821	12800	10286	6815				
RBCE-3H42-20	2	859	2.00	28	18982	17683	17351	16313	15596	13694	11413	8405	4645			
		911	2.40	30	20132	18910	18597	17638	16962	15256	13238	10809	7565			
RBCE-3H42-30	3	983	3.00	33	21723	20594	20305	19433	18817	17244	15540	13562	11224	4851		
		1043	3.60	36	23049	21985	21717	20895	20337	18860	17357	15631	13653	8237		
RBCE-3H42-50	5	1164	5.01	42	25722	24770	24531	23801	23310	22023	20696	19343	17796	14149	9092	
		1238	6.01	47	27358	26462	26238	25557	25095	23913	22668	21413	20072	16964	13130	7889
48 Performance					Max RPM H - 1299			Max Motor Frame Size - 215T					TS = RPM x 12.566			
RBCE-3H48-20	2	716	1.50	26	20726	18695	18077	16305	15035	11320	6243					
		787	2	30	22781	20988	20454	18833	17730	14693	10874	6074				
		836	2.4	33	24199	22498	22068	20506	19528	16806	13526	9417	4866			
RBCE-3H48-30	3	901	3.01	36	26081	24484	24118	22707	21781	19345	16622	13352	9283			
		957	3.6	38	27702	26183	25838	24592	23680	21459	19070	16209	12924			
RBCE-3H48-50	5	1068	5.01	45	30915	29524	29215	28258	27429	25456	23390	21237	18700	12639		
		1135	6.01	50	32854	31527	31236	30362	29655	27749	25888	23886	21748	16626	10065	
RBCE-3H48-75	7-1/2	1222	7.5	58	35373	34128	33845	33034	32493	30694	29005	27200	25334	21056	15907	9598
		1299	9.01	67	37602	36431	36143	35380	34871	33292	31648	30046	28305	24604	20260	14857
54 Performance					Max RPM H - 968			Max Motor Frame Size - 256T					TS = RPM x 14.135			
RBCE-3H54-30	3	532	1.99	22	24860	22718	22185	20702	19470	15727	11392					
		611	3.01	26	28552	26683	26219	24873	24014	21307	17904	14094	10436			
		648	3.60	28	30281	28517	28080	26784	25974	23630	20733	17182	13651			
RBCE-3H54-50	5	724	5.02	32	33833	32252	31859	30685	29920	28107	25806	23143	19990	13677		
		769	6.02	36	35935	34447	34075	32970	32233	30511	28535	26204	23524	17507	11235	
RBCE-3H54-75	7-1/2	828	7.51	40	38692	37310	36965	35936	35252	33609	32021	29987	27747	22424	16893	
		880	9.02	45	41122	39822	39497	38526	37882	36299	34808	33110	31170	26552	21244	16164
RBCE-3H54-100	10	911	10.00	48	42571	41315	41001	40062	39440	37888	36447	34939	33090	28913	23848	18844
		968	12.00	56	45235	44052	43757	42870	42285	40822	39428	38072	36508	32833	28458	23599
60 Performance					Max RPM H - 814			Max Motor Frame Size - 256T					TS = RPM x 15.691			
RBCE-3H60-50	5	517	3.08	25	32940	30485	29879	28146	26950	23106	18254	13380				
		608	5.01	32	38738	36639	36124	34579	33612	30975	27690	23760	19477			
		646	6.01	34	41159	39183	38695	37240	36296	34028	31105	27739	23811	15973		
RBCE-3H60-75	7-1/2	696	7.52	38	44345	42510	42052	40701	39801	37681	35274	32431	29182	21805	14227	
		740	9.03	42	47148	45423	44991	43716	42870	40836	38820	36297	33489	26823	19970	
RBCE-3H60-100	10	766	10.02	44	48805	47138	46721	45486	44668	42680	40772	38444	35848	29727	22992	16147
		814	12	49	51863	50294	49902	48734	47965	46050	44255	42335	40041	34764	28467	22272
72 Performance					Max RPM H - 714			Max Motor Frame Size - 256T					TS = RPM x 18.802			
RBCE-3H72-75	7-1/2	464	4.95	29	50660	46744	45715	42627	40365	33143	26752	10599				
		533	7.51	34	58193	54819	53945	51256	49464	44440	37857	32422	20045			
		567	9.04	38	61905	58734	57940	55413	53728	49262	43510	37958	32427			
RBCE-3H72-100	10	587	10.03	40	64089	61026	60260	57835	56208	51980	46771	40991	36055	13429		
		624	12.04	44	68128	65247	64526	62277	60746	56919	52645	46994	42022	27563		
RBCE-3H72-150	15	672	15	50	73369	70693	70024	67976	66554	63000	59236	54816	49539	40631	19366	
		714	18	56	77955	75436	74807	72914	71576	68231	64867	61125	56486	47522	37081	

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free inlet hemispherical sone levels.

*Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG																	
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00						
Level 1 Performance		Max RPM	L - 809	H - 1157	Max Motor Frame Size - 145T							TS = RPM x 6.283										
RBS-1L24-4	1/4	495	0.15	11.6	4501	3083	2469														CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.	
		582	0.25	12.9	5292	4271	3873	3387														
		619	0.30	13.6	5628	4677	4371	3968	3008													
RBS-1H24-4	1/4	726	0.15	11.8	3626	3093	2862	2563	1776													
		853	0.25	15.8	4261	3825	3703	3571	3077	2524	1955											
		914	0.30	19.1	4565	4156	4059	3936	3583	3122	2460											
RBS-1L24-3	1/3	638	0.33	13.9	5801	4881	4615	4249	3313													
		680	0.40	14.7	6183	5326	5098	4813	4049	3167												
RBS-1H24-3	1/3	943	0.33	19.8	4710	4312	4218	4107	3825	3355	2852											
		1006	0.40	22	5025	4649	4561	4473	4250	3872	3458	2503										
RBS-1L24-5	1/2	733	0.50	16.3	6665	5878	5667	5455	4852	4050	3273											
		779	0.60	17.9	7083	6364	6151	5952	5477	4819	4019											
RBS-1H24-5	1/2	1083	0.50	24	5410	5057	4975	4893	4708	4500	4079	3474										
		1157	0.60	25	5779	5445	5369	5292	5140	4945	4702	4125	2862									
RBS-1L24-7	3/4	809	0.67	18.9	7356	6677	6463	6271	5862	5269												
Level 2 Performance		Max RPM	L - 891	H - 1322	Max Motor Frame Size - 145T							TS = RPM x 6.283										
RBS-2L24-5	1/2	733	0.50	16.3	6665	5878	5667	5455	4852	4050	3273	1835										
		779	0.60	17.9	7083	6364	6151	5952	5477	4819	4019	2672										
RBS-2H24-5	1/2	1083	0.58	24	5410	5057	4975	4893	4708	4500	4079	3474	2411	1870								
		1157	0.60	25	5779	5445	5369	5292	5140	4945	4702	4125	2862	2355	1849							
RBS-2L24-7	3/4	839	0.75	20	7629	6988	6778	6588	6219	5707	5061	3980	1991									
		891	0.90	23	8102	7522	7325	7129	6782	6382	5843	4841	2866									
RBS-2H24-7	3/4	1230	0.75	29	6144	5828	5754	5683	5539	5377	5193	4725	3808	2814	2338							
		1322	0.90	37	6603	6309	6237	6170	6036	5902	5740	5484	4652	3599	2926	2025						
Level 3 Performance		Max RPM	L - 1278	H - 1420	Max Motor Frame Size - 145T							TS = RPM x 6.283										
RBS-3L24-7	3/4	951	0.50	22	6030	5614	5481	5348	5049	4591	3955											
		1093	0.75	27	6930	6577	6485	6369	6138	5899	5542	4739										
		1161	0.90	28	7361	7029	6946	6849	6631	6413	6152	5565	4383									
RBS-3H24-7	3/4	1063	0.49	22	5575	5215	5120	5024	4827	4572	4212	3446	2285									
		1221	0.77	25	6403	6090	6012	5931	5764	5597	5384	4992	3921	2925	1911							
		1299	0.90	28	6813	6518	6444	6371	6215	6058	5893	5580	4685	3787	2768							
RBS-3L24-10	1	1205	1.00	30	7640	7320	7240	7157	6947	6738	6527	6036	4861									
		1278	1.20	31	8103	7801	7726	7650	7467	7269	7071	6706	5641	4663								
RBS-3H24-10	1	1346	1.00	29	7059	6775	6704	6632	6484	6333	6182	5893	5205	4213	3302							
		1420	1.20	31	7447	7178	7110	7043	6906	6762	6619	6379	5852	4866	4121	2320						

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels. *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG												
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00	
Level 1 Performance		Max RPM	L - 696	H - 906	Max Motor Frame Size - 184T						TS = RPM x 7.854						
RBS-1L30-4	1/4	382	0.15	10.9	5857	3056	1565										CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.
		449	0.25	12.6	6885	5115	4215	2987									
		477	0.30	13.4	7314	5769	5045	4099									
RBS-1H30-4	1/4	505	0.17	13.1	5167	3875	3391	2484	1629								
		593	0.29	16.3	6068	5183	4863	4337	3094	2274	1591						
		624	0.30	17.8	6385	5558	5316	4850	3985	2773	2081						
RBS-1L30-3	1/3	493	0.33	13.9	7559	6135	5486	4654	2381								
		525	0.40	15.0	8050	6795	6258	5595	3716								
RBS-1H30-3	1/3	646	0.35	19.0	6610	5815	5587	5260	4419	3116	2431						
		686	0.40	22	7019	6273	6074	5854	5027	4212	3076	2145					
RBS-1L30-5	1/2	466	0.28	13.1	7145	5515	4736	3670									
		601	0.60	17.7	9215	8259	7879	7450	6315	4714	2796						
RBS-1H30-5	1/2	740	0.51	24	7572	6884	6706	6515	5964	5213	4309	3008					
		788	0.60	26	8063	7420	7253	7085	6708	5932	5363	3767	2412				
RBS-1L30-7	3/4	647	0.75	19.7	9921	9101	8772	8403	7518	6343	4714						
		689	0.90	22	10565	9858	9548	9239	8489	7533	6318	3852					
		696	0.90	22	10672	9983	9677	9370	8648	7725	6543	4146					
RBS-1H30-7	3/4	846	0.87	27	8657	8061	7905	7750	7420	7012	6243	5281	3336	2136			
		906	0.90	29	9271	8718	8573	8427	8136	7808	7299	6380	4289	3086			
Level 2 Performance		Max RPM	L - 869	H - 1136	Max Motor Frame Size - 184T						TS = RPM x 7.854						
RBS-2L30-7	3/4	647	0.75	19.7	9921	9101	8772	8403	7518	6343							
		689	0.90	22	10565	9858	9548	9239	8489	7533	6318						
RBS-2H30-7	3/4	846	0.75	27	8657	8061	7905	7750	7420	7012	6243	5281					
		906	0.90	29	9271	8718	8573	8427	8136	7808	7299	6380	4289				
RBS-2L30-10	1	712	1.00	23	10917	10268	9969	9669	8990	8137	7050						
		758	1.20	25	11623	11013	10800	10519	9922	9209	8341						
RBS-2H30-10	1	940	1.00	30	9619	9087	8948	8808	8527	8224	7903	6893	4983				
		991	1.20	31	10140	9637	9508	9375	9109	8840	8536	7751	6391	4453			
RBS-2L30-15	1-1/2	815	1.50	28	12497	11929	11788	11555	11032	10438	9734	8425					
		869	1.81	31	13325	12793	12660	12522	12031	11523	10949	9894					
RBS-2H30-15	1-1/2	1064	1.50	34	10887	10418	10301	10179	9931	9683	9424	8999	7637	6066	4535		
		1136	1.80	38	11624	11185	11075	10965	10733	10501	10269	9887	8793	7720	5659		
Level 3 Performance		Max RPM	L - 995	H - 1243	Max Motor Frame Size - 184T						TS = RPM x 7.854						
RBS-3L30-15	1-1/2	813	0.99	24	10284	9748	9614	9458	9002	8286	7513	6204	3921				
		934	1.50	30	11815	11349	11232	11115	10851	10496	9892	8937	7045	4752	3864		
		995	1.80	33	12587	12149	12039	11930	11711	11406	11012	10134	8432	6625	4791		
RBS-3H30-15	1-1/2	925	0.99	31	9858	9399	9284	9132	8829	8480	8083	7156	5525	4085			
		1063	1.50	39	11329	10930	10830	10730	10484	10220	9954	9435	8157	6701	5497		
		1129	1.80	43	12033	11656	11562	11468	11263	11014	10765	10334	9359	7874	6697	4273	
RBS-3H30-20	2	1170	2.00	46	12470	12106	12016	11925	11743	11503	11263	10883	10054	8734	7441	5166	
		1243	2.40	52	13248	12906	12820	12735	12564	12366	12140	11801	11109	10133	8746	6635	

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (Birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG														
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25	1.50			
Level 3 Performance		Max RPM	L - 504	H - 620	Max Motor Frame Size - 256T						TS = RPM x 18.802								
RBS-3L72-20	2	223	1.56	16.3	38315	29369	25855	17195											
		244	2.04	18.6	41923	34410	31457	22749	17564										
		259	2.42	20	44500	37707	35305	26547	22177										
RBS-3H72-20	2	273	1.55	17.0	34192	27163	25455	19460	13130										
		299	2.01	19.4	37448	32375	29435	24865	20334										
		319	2.40	21	39953	35119	32984	28035	25143	11923									
RBS-3L72-30	3	277	3.00	23	47593	41523	39402	31307	26404										
		295	3.62	25	50685	45115	43335	36197	31114	20299									
RBS-3H72-30	3	341	3.00	23	42709	38098	37121	31523	28874	18327									
		364	3.62	26	45589	41179	40263	35079	32516	24397									
RBS-3L72-50	5	329	5.01	30	56527	51771	50278	45008	40251	29959									
		352	6.05	32	60479	56198	54802	50197	46283	35646	27004								
RBS-3H72-50	5	405	5.01	30	50724	46543	45777	42085	38919	33334	24583								
		432	6.13	33	54106	50033	49332	47047	43001	37635	30848	20879							
RBS-3L72-75	7-1/2	376	7.55	34	64602	60688	59460	55431	52220	41955	33678	24659							
		400	9.00	36	68726	65046	64064	60380	57541	48509	39430	32178							
RBS-3H72-75	7-1/2	464	7.66	37	58114	54140	53487	51414	49751	42704	37899	30121	19945						
		493	9.04	42	61746	57840	57226	55325	53973	47203	42539	36936	29389						
RBS-3L72-100	10	416	10.17	38	71475	67937	67052	63566	61027	52755	43688	36618	28327						
		440	12.00	42	75599	72253	71417	68294	66061	58965	50061	42214	35806						
RBS-3H72-100	10	511	10.03	47	64000	60128	59536	57733	56428	49944	45380	41106	33628						
		545	12.31	55	68259	64435	63879	62212	61024	55293	50753	46581	41691	25918					
RBS-3L72-150	15	475	15.20	48	81612	78513	77738	75095	73026	67189	59507	51431	44632	30997					
		504	18.00	55	86595	83674	82944	80661	78711	73552	67046	59275	52057	40100					
RBS-3H72-150	15	585	15.80	57	73268	69479	68961	67408	66369	63521	56905	52918	49112	37652	22395				
		620	18.10	60	77652	73877	73388	71923	70946	68315	62164	58402	54641	45820	32595				

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	Sones @ F.A.	CFM / Static Pressure in Inches WG													
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00		
24 Performance					Max RPM H - 1535			Max Motor Frame Size - 145T					TS = RPM x 6.283					
RBCS-3H24-3	1/3	795	0.25	14.6	4722	4231	4110	3984	3299	1781	1086							
		873	0.33	16.1	5186	4736	4626	4516	4224	3360	1978	1025						
		930	0.40	17.3	5524	5101	4998	4895	4688	4267	2957	1693						
RBCS-3H24-5	1/2	1001	0.50	18.8	5946	5551	5456	5360	5168	4932	4448	2566	1098					
		1066	0.60	20	6332	5960	5870	5780	5600	5420	5146	4048	1864					
RBCS-3H24-7	3/4	1147	0.75	23	6813	6466	6382	6299	6131	5964	5796	5327	2838	1562				
		1220	0.90	25	7247	6919	6840	6761	6604	6447	6289	5991	4444	2405	1272			
RBCS-3H24-10	1	1261	1.00	26	7490	7173	7096	7020	6868	6715	6563	6333	5298	2869	1764			
		1342	1.20	29	7971	7673	7599	7527	7385	7242	7099	6884	6351	4247	2697			
RBCS-3H24-15	1-1/2	1444	1.50	33	8577	8300	8231	8162	8030	7897	7764	7564	7213	6409	4025	1894		
		1535	1.80	37	9118	8857	8792	8727	8601	8476	8351	8163	7850	7396	6295	2949		
30 Performance					Max RPM H - 1445			Max Motor Frame Size - 184T					TS = RPM x 7.854					
RBCS-3H30-5	1/2	652	0.33	15.2	7278	6272	5844	5149	3910	1970								
		749	0.50	19.2	8361	7522	7279	7012	5869	4844	2972							
		796	0.60	22	8886	8098	7896	7647	6786	5799	4729	2337						
RBCS-3H30-7	3/4	857	0.75	23	9567	8838	8651	8456	7989	6948	6076	3769						
		911	0.90	25	10169	9487	9311	9134	8721	8027	7062	5785	2402					
RBCS-3H30-10	1	943	1.00	26	10527	9869	9699	9528	9149	8710	7694	6511	3282					
		1002	1.20	28	11185	10568	10409	10248	9927	9528	8880	7597	4766	2076				
RBCS-3H30-15	1-1/2	1080	1.50	31	12056	11484	11340	11191	10893	10569	10199	9101	7332	4265				
		1147	1.80	34	12804	12265	12130	11993	11712	11432	11099	10500	8590	6780	3833			
RBCS-3H30-20	2	1188	2.00	36	13262	12741	12611	12480	12210	11939	11643	11138	9354	7746	4785			
		1264	2.41	40	14110	13621	13499	13376	13125	12871	12616	12164	10834	9269	7606	2498		
RBCS-3H30-30	3	1360	3.00	47	15182	14727	14613	14500	14271	14035	13798	13435	12700	11084	9700	5255		
		1445	3.60	53	16131	15703	15596	15489	15275	15055	14833	14499	13851	12790	11257	8297		
36 Performance					Max RPM H - 1488			Max Motor Frame Size - 184T					TS = RPM x 9.424					
RBCS-3H36-7	3/4	648	0.50	22	10280	8914	8516	8065	6680	4767								
		744	0.75	24	11803	10656	10326	9989	9212	8104	6588	3403						
		791	0.90	25	12548	11458	11185	10869	10211	9311	8095	5726						
RBCS-3H36-10	1	819	1.00	26	12992	11933	11690	11385	10759	9991	8982	6904						
		871	1.20	29	13817	12808	12583	12334	11760	11152	10310	8608	4541					
RBCS-3H36-15	1-1/2	938	1.50	33	14880	13926	13718	13509	13005	12462	11896	10622	7651					
		996	1.80	36	15800	14888	14691	14495	14065	13563	13040	12067	9620	6199				
RBCS-3H36-20	2	1032	2.00	38	16371	15490	15292	15103	14716	14232	13738	12929	10805	7852				
		1097	2.41	41	17403	16573	16371	16193	15836	15424	14969	14255	12623	10239	7087			
RBCS-3H36-30	3	1181	3.00	47	18735	17965	17772	17591	17260	16928	16518	15883	14675	12935	10564			
		1255	3.60	53	19909	19184	19003	18821	18502	18190	17862	17265	16230	14828	12941	7598		
RBCS-3H36-50	5	1400	5.00	67	22209	21559	21397	21234	20913	20634	20354	19914	19022	18084	16858	13339		
		1488	6.00	78	23605	22994	22841	22688	22382	22101	21838	21444	20653	19799	18907	16207		

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Model Number	Motor HP	Fan RPM	Max BHP	Sones @ F.A.	CFM / Static Pressure in Inches WG													
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25	1.50		
42 Performance					Max RPM H - 1210			Max Motor Frame Size - 215T					TS = RPM x 10.995					
RBCS-3H42-10	1	607	0.76	21	14494	12645	12189	10381	8657									
		667	1.00	25	15927	14239	13825	12300	11186	6444								
		708	1.20	27	16906	15312	14922	13581	12561	9024								
RBCS-3H42-15	1-1/2	762	1.50	29	18195	16693	16347	15242	14257	11548	6870							
		811	1.81	32	19365	17932	17621	16602	15788	13486	10123							
RBCS-3H42-20	2	839	2.00	33	20034	18635	18335	17361	16648	14479	11384	6908						
		893	2.41	37	21323	19985	19703	18807	18188	16204	13971	10641						
RBCS-3H42-30	3	961	3.00	42	22947	21672	21410	20603	20028	18333	16458	13742	10413					
		1021	3.61	46	24380	23156	22906	22165	21627	20188	18391	16458	13650					
RBCS-3H42-50	5	1139	5.00	53	27197	26100	25826	25160	24717	23506	22082	20482	18783	13953				
		1210	6.01	58	28893	27860	27602	26942	26526	25412	24257	22704	21234	17138	11188			
48 Performance					Max RPM H - 1315			Max Motor Frame Size - 215T					TS = RPM x 12.566					
RBCS-3H48-20	2	726	1.51	33	20514	18732	18206	16357	14968	11087	5981							
		797	2.00	37	22521	20912	20488	18936	17724	14581	10549							
		847	2.41	41	23933	22431	22031	20688	19598	16687	13260	9148						
RBCS-3H48-30	3	912	3.00	45	25770	24389	24018	22823	21908	19208	16460	12950	9004					
		970	3.61	49	27409	26123	25774	24697	23893	21471	18950	16027	12577					
RBCS-3H48-50	5	1081	5.00	59	30545	29395	29102	28163	27500	25562	23270	21049	18504	12182				
		1149	6.00	65	32467	31384	31114	30241	29651	27952	25905	23709	21605	16128	9542			
RBCS-3H48-75	7-1/2	1238	7.51	75	34982	33977	33726	32935	32388	30900	29153	27166	25172	20842	15435			
		1315	9.00	86	37158	36212	35975	35247	34733	33393	31867	30112	28148	24420	19684	14353		
54 Performance					Max RPM H - 912			Max Motor Frame Size - 256T					TS = RPM x 14.135					
RBCS-3H54-30	3	501	1.99	27	25648	23380	22606	20561	19091	14486	8587							
		575	3.01	35	29437	27649	27015	25102	23926	20645	16357	11166						
		611	3.61	39	31280	29597	29116	27245	26139	23206	19698	14854	10239					
RBCS-3H54-50	5	681	5.00	44	34863	33354	32976	31433	30336	27830	25065	21834	17547	7482				
		724	6.01	48	37064	35645	35290	33976	32904	30525	28038	25318	21936	13777				
RBCS-3H54-75	7-1/2	780	7.52	55	39931	38614	38284	37244	36249	33930	31724	29347	26769	19571	11876			
		829	9.02	60	42440	41200	40890	39960	39133	36855	34816	32647	30336	24690	17428			
RBCS-3H54-100	10	858	10.01	62	43924	42726	42427	41529	40823	38565	36595	34553	32399	27314	20364	13670		
		912	12.00	67	46689	45562	45280	44435	43871	41818	39860	38007	36019	31746	26163	19488		
60 Performance					Max RPM H - 733			Max Motor Frame Size - 256T					TS = RPM x 15.691					
RBCS-3H60-50	5	465	3.08	30	35105	32774	32192	29702	28334	22686	12143							
		547	5.01	39	41296	39314	38819	37088	35590	32390	27608	18953						
		582	6.02	45	43938	42076	41610	40204	38797	35827	32009	26676	17562					
RBCS-3H60-75	7-1/2	626	7.50	50	47260	45529	45096	43797	42756	39731	36800	32866	27547					
		665	9.00	54	50204	48574	48167	46945	46130	43132	40737	37364	33123	18949				
RBCS-3H60-100	10	690	10.04	57	52092	50521	50128	48950	48165	45436	42975	40082	36587	23624				
		733	12.05	62	55338	53859	53490	52381	51641	49344	46767	44599	41427	33284	18588			
72 Performance					Max RPM H - 720			Max Motor Frame Size - 256T					TS = RPM x 18.802					
RBCS-3H72-75	7-1/2	469	4.98	39	51921	49645	49076	46588	44683	38706	28381							
		538	7.52	47	59560	57576	57080	55540	53880	49446	44122	34897	18789					
		572	9.04	51	63324	61458	60991	59592	58303	54398	49522	43190	34195					
RBCS-3H72-100	10	592	10.02	54	65538	63735	63284	61932	60878	57106	52631	47792	38837					
		629	12.01	58	69634	67937	67513	66240	65392	62048	58269	53714	47878	25521				
RBCS-3H72-150	15	678	15.00	63	75058	73484	73091	71910	71123	68481	65187	61319	57093	43561				
		720	18.00	68	79708	78226	77855	76743	76002	73912	70810	67658	63679	53801	36647			

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (birdscreen). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Filtered Supply RBF-20

Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG																
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00					
Level 1 Performance		Max RPM	L - 1048	H - 1358	Max Motor Frame Size - 145T							TS = RPM x 5.235									
RBF-1L20-4	1/4	666	0.15	14.6	2933	2098	1739													CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.	
		783	0.25	16.3	3448	2801	2598	2338													
		832	0.30	17.1	3664	3076	2884	2683	2112												
RBF-1H20-4	1/4	858	0.15	17.7	2573	2183	2073	1952													
		1009	0.25	19.3	3025	2708	2615	2526	2326	2057											
		1076	0.30	20	3226	2937	2848	2762	2586	2375											
RBF-1L20-3	1/3	859	0.33	17.5	3783	3225	3039	2853	2337												
		916	0.40	18.4	4034	3534	3360	3186	2784												
RBF-1H20-3	1/3	1107	0.33	21	3319	3042	2955	2870	2704	2517	2262										
		1185	0.40	22	3553	3303	3223	3142	2987	2822	2631										
RBF-1L20-5	1/2	986	0.50	19.6	4342	3884	3745	3583	3260	2822											
		1048	0.60	21	4615	4190	4071	3927	3623	3282	2828										
RBF-1H20-5	1/2	1273	0.50	24	3817	3585	3520	3445	3296	3155	2994	2698									
		1358	0.60	26	4072	3854	3800	3733	3592	3457	3320	3092									
Level 2 Performance		Max RPM	L - 1200	H - 1554	Max Motor Frame Size - 145T							TS = RPM x 5.235									
RBF-2L20-5	1/2	986	0.50	19.6	4342	3884	3745	3583	3260	2822	2169	1659									
		1048	0.60	21	4615	4190	4071	3927	3623	3282	2828	2043	1165								
RBF-2H20-5	1/2	1273	0.60	24	3817	3585	3520	3445	3296	3155	2994	2698	1845	1603	1341						
		1358	0.60	26	4072	3854	3800	3733	3592	3457	3320	3092	2432	1867	1640						
RBF-2L20-7	3/4	1129	0.75	23	4972	4585	4474	4364	4084	3802	3461	2765	1855								
		1200	0.90	25	5284	4927	4823	4719	4479	4213	3948	3395	2297	1571							
RBF-2H20-7	3/4	1457	0.78	30	4369	4166	4115	4064	3933	3802	3679	3478	3054	2250	1951	1489					
		1554	0.90	34	4660	4469	4422	4374	4263	4140	4019	3845	3508	3014	2245	1848					

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Filtered Supply RBF-24



Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG																
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00					
Level 1 Performance		Max RPM	L - 809	H - 1154	Max Motor Frame Size - 145T						TS = RPM x 6.283										
RBF-1L24-4	1/4	497	0.15	12.1	4157	2604														CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.	
		584	0.25	13.1	4884	3766	3238	2898													
		620	0.30	13.6	5186	4168	3805	3321													
RBF-1H24-4	1/4	727	0.15	11.6	3469	2867	2639	2409	1651												
		855	0.25	15.9	4079	3648	3492	3275	2892	2341	1817										
		913	0.30	19.1	4356	3955	3849	3666	3294	2924	2290										
RBF-1L24-3	1/3	641	0.33	14.0	5361	4396	4074	3561													
		683	0.40	14.6	5712	4823	4547	4229	3449												
RBF-1H24-3	1/3	941	0.33	19.8	4490	4101	3999	3855	3480	3127	2614										
		1006	0.40	22	4800	4440	4344	4248	3902	3584	3246	2386									
RBF-1L24-5	1/2	736	0.50	15.7	6156	5350	5113	4846	4065												
		781	0.60	17.2	6532	5791	5566	5342	4760	4061											
RBF-1H24-5	1/2	1081	0.50	24	5158	4826	4736	4647	4414	4080	3781	3246									
		1154	0.60	25	5506	5196	5115	5031	4864	4564	4272	3841	2665								
RBF-1L24-7	3/4	809	0.67	18.1	6766	6062	5845	5629	5133	4386											
Level 2 Performance		Max RPM	L - 895	H - 1319	Max Motor Frame Size - 145T						TS = RPM x 6.283										
RBF-2L24-5	1/2	736	0.50	15.7	6156	5350	5113	4846	4065	3454	2687										
		781	0.60	17.2	6532	5791	5566	5342	4760	4061	3335	2467									
RBF-2H24-5	1/2	1081	0.59	24	5158	4826	4736	4647	4414	4080	3781	3246	2215	1707							
		1154	0.60	25	5506	5196	5115	5031	4864	4564	4272	3841	2665	2154	1678						
RBF-2L24-7	3/4	842	0.75	19.1	7042	6379	6170	5962	5507	4813	4290	3241									
		895	0.90	22	7486	6883	6686	6489	6095	5630	4905	4117	2720								
RBF-2H24-7	3/4	1235	0.83	30	5892	5603	5531	5452	5296	5112	4798	4409	3601	2628	2184						
		1319	0.90	37	6293	6022	5955	5885	5739	5592	5372	4965	4337	3320	2684	1833					
Level 3 Performance		Max RPM	L - 1285	H - 1364	Max Motor Frame Size - 145T						TS = RPM x 6.283										
RBF-3L24-7	3/4	956	0.50	22	5613	5146	5002	4851	4329	3951	3552	2736	1693								
		1098	0.75	27	6447	6087	5948	5820	5559	5105	4738	4227	3090	2141							
		1167	0.90	27	6852	6537	6407	6276	6042	5767	5273	4807	3888	2726	2040						
RBF-3H24-7	3/4	1008	0.46	20	5065	4689	4591	4474	4246	4028	3618	2858	1618								
		1158	0.76	23	5818	5495	5410	5326	5131	4930	4741	4321	3251	2200	1046						
		1264	0.90	26	6351	6058	5980	5902	5745	5557	5374	5114	4267	3376	2352						
RBF-3L24-10	1	1209	1.00	29	7099	6807	6683	6557	6326	6078	5660	5148	4361	3234	2398						
		1285	1.20	31	7545	7271	7180	7062	6834	6621	6367	5743	5029	4121	3067	1805					
RBF-3H24-10	1	1310	1.00	27	6582	6300	6225	6150	6000	5827	5645	5393	4764	3762	2939						
		1364	1.20	29	6853	6583	6512	6440	6296	6140	5966	5717	5210	4227	3522	1542					

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Filtered Supply RBF-30



Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG													
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00		
Level 1 Performance		Max RPM	L - 696	H - 927	Max Motor Frame Size - 184T						TS = RPM x 7.854							
RBF-1L30-4	1/4	380	0.15	10.7	5653													CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.
		447	0.25	12.5	6649	4830												
		476	0.30	13.3	7080	5610	4763											
RBF-1H30-4	1/4	511	0.15	13.3	5079	3960	3386	2775										
		601	0.25	16.8	5974	5107	4850	4471	3485									
		644	0.30	19.0	6401	5612	5377	5110	4243	3129								
RBF-1L30-3	1/3	490	0.33	13.7	7289	5986	5141											
		523	0.40	14.8	7780	6576	6022	5261										
RBF-1H30-3	1/3	662	0.33	20	6580	5815	5592	5363	4570	3648								
		707	0.40	23	7028	6311	6123	5908	5374	4518	3472							
RBF-1L30-5	1/2	562	0.50	16.2	8360	7244	6957	6297										
		599	0.60	17.6	8910	7875	7598	7301	5941									
RBF-1H30-5	1/2	760	0.50	25	7554	6887	6721	6538	6131	5480	4695	3382						
		808	0.60	26	8032	7403	7247	7091	6722	6262	5545	4389						
RBF-1L30-7	3/4	644	0.75	19.4	9580	8643	8365	8114	7142									
		685	0.90	21	10189	9332	9067	8816	8253	7057								
RBF-1H30-7	3/4	869	0.75	28	8638	8053	7908	7763	7448	7099	6627	5587	3772					
		927	0.90	29	9214	8665	8529	8393	8122	7798	7456	6641	4896					
RBF-1L30-10	1	696	0.95	22	10353	9516	9255	9003	8539	7351								
Level 2 Performance		Max RPM	L - 862	H - 1159	Max Motor Frame Size - 184T						TS = RPM x 7.854							
RBF-2L30-7	3/4	644	0.75	19.4	9580	8643	8365	8114	7142	5984	4745							
		685	0.90	21	10189	9332	9067	8816	8253	7057	6021	3787						
RBF-2H30-7	3/4	869	0.85	28	8638	8053	7908	7763	7448	7099	6627	5587	3772	2652				
		927	0.90	29	9214	8665	8529	8393	8122	7798	7456	6641	4896	3510	2523			
RBF-2L30-10	1	709	1.00	22	10546	9732	9476	9223	8767	7696	6647	4948						
		754	1.20	25	11216	10476	10235	9995	9548	8908	7828	6379						
RBF-2H30-10	1	954	1.13	30	9483	8948	8817	8685	8421	8119	7801	7137	5578	3941	2936			
		1022	1.20	32	10159	9660	9536	9413	9167	8917	8620	8132	6773	5057	3950	2149		
RBF-2L30-15	1-1/2	813	1.50	28	12093	11408	11217	10994	10553	10156	9406	7951	5450					
		862	1.80	31	12822	12176	12014	11814	11393	11001	10626	9258	7096	3895				
RBF-2H30-15	1-1/2	1096	1.72	36	10894	10429	10313	10198	9968	9738	9494	9079	8139	6760	5108	3305		
		1159	1.80	40	11520	11081	10971	10861	10644	10427	10209	9833	9090	7866	6662	4242		
Level 3 Performance		Max RPM	L - 984	H - 1239	Max Motor Frame Size - 184T						TS = RPM x 7.854							
RBF-3L30-15	1-1/2	806	0.99	23	9364	8543	8330	8013	7428	6844	6180	5073	3585					
		926	1.50	28	10759	10050	9867	9682	9183	8672	8178	7350	5746	4334	3517			
		984	1.80	31	11432	10766	10597	10423	10032	9516	9051	8331	6954	5092	4353			
RBF-3H30-15	1-1/2	909	0.95	30	9465	8994	8860	8725	8456	8168	7877	7170	5375					
		1044	1.44	36	10870	10462	10359	10245	10011	9777	9532	9151	8187	6512	5229			
		1126	1.80	42	11724	11345	11250	11156	10939	10722	10505	10158	9511	8066	6825			
RBF-3H30-20	2	1168	2.00	45	12161	11796	11705	11613	11411	11201	10992	10666	10100	9166	7551			
		1239	2.40	50	12901	12556	12470	12384	12204	12006	11809	11512	10981	10317	8997	6701		

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sonas at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG														
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00			
Level 1 Performance					Max RPM	L - 551	H - 623	Max Motor Frame Size - 184T					TS = RPM x 9.424						
RBF-1L36-3	1/3	323	0.25	11.8	8592														CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.
		354	0.33	12.3	9417	5820													
		377	0.40	12.8	10029	6628	5827												
RBF-1H36-3	1/3	370	0.25	9.9	7713	4288	3128	2496											
		406	0.33	10.5	8464	5619	4451	3444											
		432	0.40	11.2	9006	6459	5497	4285	3011										
RBF-1L36-5	1/2	406	0.50	13.4	10800	7730	6870												
		432	0.60	14.2	11492	8753	7795	7073											
RBF-1H36-5	1/2	466	0.50	12.6	9715	7440	6676	5747	3905										
		495	0.60	13.6	10319	8221	7600	6808	4768	3688									
RBF-1L36-7	3/4	465	0.75	15.6	12370	10302	9063	8231											
		494	0.90	16.9	13141	11416	10429	9343	7994										
RBF-1H36-7	3/4	533	0.75	15.2	11112	9218	8644	8035	6441	4670	3793								
		566	0.90	17.3	11800	10063	9525	8983	7677	5919	4661								
RBF-1L36-10	1	512	1.00	17.8	13620	12094	11211	10026	8635										
		544	1.20	19.7	14472	13058	12447	11589	9764	8637									
RBF-1H36-10	1	587	1.00	18.3	12237	10592	10075	9553	8366	6857	5195	4000							
		623	1.20	21	12988	11492	11001	10512	9515	8226	6621	4957							
RBF-1L36-15	1-1/2	551	1.25	20	14658	13265	12714	11893	10038	8890									
Level 2 Performance					Max RPM	L - 685	H - 785	Max Motor Frame Size - 184T					TS = RPM x 9.424						
RBF-2L36-10	1	512	1.00	17.8	13620	12094	11211	10026	8635	7189									
		544	1.20	19.7	14472	13058	12447	11589	9764	8637	6985								
RBF-2H36-10	1	587	1.00	18.3	12237	10592	10075	9553	8366	6857	5195	4000							
		623	1.20	21	12988	11492	11001	10512	9515	8226	6621	4957							
RBF-2L36-15	1½-1/2	586	1.51	23	15589	14292	13940	13255	11381	10130	9099								
		623	1.81	25	16573	15368	15036	14660	13083	11494	10432	8592							
RBF-2H36-15	1-1/2	672	1.51	24	14009	12726	12236	11784	10875	9860	8619	6255	4460						
		713	1.80	28	14864	13742	13266	12824	11970	11111	10053	8156	5557						
RBF-2L36-20	2	645	2.01	27	17158	16002	15682	15362	14077	12339	11204	9731							
		685	2.41	31	18222	17149	16848	16546	15626	13955	12689	11253	7831						
RBF-2H36-20	2	739	2.00	30	15406	14379	13920	13475	12653	11824	10893	9170	6230						
		785	2.40	35	16365	15418	15064	14632	13838	13061	12280	10841	7650	5893					
Level 3 Performance					Max RPM	L - 924	H - 1408	Max Motor Frame Size - 184T					TS = RPM x 9.424						
RBF-3L36-20	2	692	1.51	30	13959	12819	12468	12030	11176	10415	9657	8532	6092						
		760	2.01	34	15331	14339	14024	13705	12908	12140	11459	10417	8746	6153					
		807	2.41	37	16279	15377	15080	14783	14089	13350	12639	11709	10073	8166	5720				
RBF-3H36-20	2	857	1.43	32	12802	12072	11897	11722	11371	10813	10093	9123	7120	5307	3819				
		941	1.79	38	14057	13389	13227	13067	12748	12429	11893	10933	9330	7554	5866	3155			
		1035	2.40	46	15461	14854	14702	14555	14265	13975	13685	12924	11555	9883	8375	5538			
RBF-3L36-30	3	870	3.01	41	17550	16755	16481	16205	15641	14945	14266	13324	11817	10357	8398				
		924	3.61	44	18639	17891	17669	17410	16892	16292	15637	14691	13307	11861	10471	6353			
RBF-3H36-30	3	1117	3.00	51	16686	16124	15983	15842	15572	15304	15035	14632	13246	12034	10282	7604			
		1187	3.60	57	17732	17202	17070	16938	16679	16426	16173	15794	14746	13541	12296	9477			
RBF-3H36-50	5	1325	5.00	70	19793	19319	19200	19082	18845	18614	18388	18048	17482	16440	15344	13010			
		1408	6.01	81	21033	20587	20475	20364	20141	19918	19705	19385	18852	18238	17049	15104			

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.

*Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Filtered Supply RBF-72



Model Number	Motor HP	Fan RPM	Max BHP	Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25	1.50
Level 3 Performance		Max RPM	L - 505	H - 620	Max Motor Frame Size - 256T					TS = RPM x 18.802						
RBF-3L72-20	2	222	1.58	15.6	34977	24323	21410	13899								
		243	2.01	18.0	38286	28728	26069	19092	13018							
		258	2.41	19.9	40649	31772	29276	21989	18366							
RBF-3H72-20	2	272	1.59	15.0	27269	21917	20312	13744	9221							
		298	2.01	18.3	29876	25178	23721	19364	14280							
		317	2.41	21	31781	27455	26135	22013	18312							
RBF-3L72-30	3	278	3.01	23	43800	35852	33411	26467	22487							
		295	3.60	25	46479	39324	36830	30255	26074	14660						
RBF-3H72-30	3	341	3.06	23	34187	30240	29113	25283	22751	12928						
		363	3.61	25	36392	32753	31697	28196	25790	17135						
RBF-3L72-50	5	330	5.04	31	51993	45967	44002	37797	33867	25643						
		350	6.01	32	55144	49572	47932	41927	38240	29356	21490					
RBF-3H72-50	5	404	5.01	29	40503	37156	36410	33438	31283	25939	17013					
		430	6.02	32	43109	39911	39226	36662	34644	29582	21718	14566				
RBF-3L72-75	7-1/2	377	7.52	34	59398	54372	52850	47351	43934	35436	28868					
		401	9.05	36	63180	58586	57154	52317	48841	40773	33203	27344				
RBF-3H72-75	7-1/2	463	7.54	36	46418	43379	42743	40541	38796	34091	29452	21104				
		492	9.05	41	49325	46405	45807	43885	42327	37947	33534	26627	20272			
RBF-3L72-100	10	415	10.03	38	65385	61024	59641	55169	51649	43867	36378	30746				
		441	12.10	42	69482	65388	64218	60314	56984	49469	42165	35814	30378			
RBF-3H72-100	10	510	10.03	44	51130	48275	47698	45939	44436	40292	36010	31138	23627			
		542	12.10	49	54338	51585	51042	49413	48139	44378	40356	36369	29939	18023		
RBF-3L72-150	15	475	15.00	48	74839	71038	70088	66512	63902	56541	49731	43151	37776			
		505	18.10	54	79565	75991	75097	71898	69624	62605	56227	49789	43811	34038		
RBF-3H72-150	15	583	15.00	54	58448	55873	55299	53785	52775	49488	45761	42015	38335	26213		
		620	18.00	58	62158	59736	59131	57696	56746	53883	50505	46988	43467	33086	23071	

CFM values shown in black are the most efficient selections. Values shown in gray are not recommended.

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM in black type at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.
 Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Cast Aluminum Filtered Supply

RBCF-24—36



Model Number	Motor HP	Fan RPM	Max BHP	Sones @ F.A.	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00
24 Performance		Max RPM H - 1445			Max Motor Frame Size - 145T							TS = RPM x 6.283				
RBCF-3H24-3	1/3	748	0.25	13.7	4380	3846	3597	3100	1857	1424	948					
		821	0.33	15.1	4807	4363	4182	3954	3091	1973	1573	923				
		876	0.40	16.2	5129	4730	4595	4399	3752	2340	2000	1407				
RBCF-3H24-5	1/2	943	0.50	17.5	5522	5172	5046	4916	4523	3757	2454	1964	1020			
		1002	0.60	18.8	5867	5556	5438	5320	5005	4601	3716	2392	1542			
RBCF-3H24-7	3/4	1080	0.75	21	6324	6039	5950	5841	5608	5277	4737	2912	2196	1372		
		1147	0.90	23	6716	6448	6381	6282	6076	5805	5471	4516	2693	1953	1177	
RBCF-3H24-10	1	1188	1.00	24	6956	6697	6633	6550	6351	6121	5821	4958	2972	2295	1546	
		1263	1.20	26	7395	7152	7091	7030	6849	6662	6409	5949	4191	2877	2194	
RBCF-3H24-15	1-1/2	1360	1.50	30	7963	7737	7681	7624	7486	7313	7139	6759	5599	3535	2988	1680
		1445	1.80	33	8461	8248	8195	8142	8035	7875	7712	7420	6752	5339	3573	2421
30 Performance		Max RPM H - 1457			Max Motor Frame Size - 184T							TS = RPM x 7.854				
RBCF-3H30-5	1/2	657	0.33	15.4	6630	5596	5060	4501	3146	1807						
		755	0.50	19.5	7619	6740	6498	6090	5133	3933	2818					
		802	0.60	22	8093	7282	7047	6822	5950	4944	3798	2098				
RBCF-3H30-7	3/4	864	0.75	23	8719	7987	7766	7551	6902	6088	5131	3564				
		918	0.90	25	9264	8594	8385	8177	7782	6984	6166	4682	2072			
RBCF-3H30-10	1	951	1.00	26	9597	8954	8761	8559	8173	7490	6749	5399	3135			
		1010	1.20	29	10192	9587	9425	9236	8863	8482	7718	6586	4375	1597		
RBCF-3H30-15	1-1/2	1088	1.50	31	10979	10417	10277	10118	9766	9428	8970	7973	6004	4031		
		1157	1.80	35	11675	11147	11015	10883	10559	10230	9918	9056	7429	5470	3673	
RBCF-3H30-20	2	1198	2.00	37	12089	11579	11451	11324	11025	10706	10400	9704	8191	6304	4545	
		1273	2.40	41	12846	12366	12246	12126	11871	11570	11271	10846	9485	7912	6106	1818
RBCF-3H30-30	3	1371	3.00	47	13835	13389	13277	13166	12943	12684	12405	11996	10987	9712	8213	4988
		1457	3.60	54	14703	14283	14178	14073	13864	13650	13387	12993	12370	11128	9851	6784
36 Performance		Max RPM H - 1476			Max Motor Frame Size - 184T							TS = RPM x 9.424				
RBCF-3H36-7	3/4	643	0.49	22	9070	7804	7350	6751	5587	3653						
		739	0.75	24	10425	9292	9040	8742	7720	6728	5371	2552				
		784	0.90	25	11059	9975	9740	9503	8691	7740	6758	4338				
RBCF-3H36-10	1	812	1.00	26	11454	10391	10171	9942	9270	8331	7428	5436				
		863	1.20	28	12174	11143	10949	10734	10285	9428	8567	7191	3337			
RBCF-3H36-15	1-1/2	930	1.50	32	13119	12123	11945	11760	11361	10809	9997	8826	5969			
		988	1.80	36	13937	12966	12798	12630	12263	11886	11222	10067	8042	4655		
RBCF-3H36-20	2	1023	2.00	37	14431	13472	13310	13147	12802	12439	11925	10813	8986	6019		
		1087	2.40	41	15333	14393	14241	14088	13780	13437	13095	12187	10480	8447	5285	
RBCF-3H36-30	3	1171	3.00	46	16518	15597	15455	15313	15030	14731	14413	13873	12261	10697	8593	
		1245	3.61	52	17562	16658	16518	16385	16119	15852	15558	15110	13857	12352	10815	5701
RBCF-3H36-50	5	1389	5.01	66	19594	18783	18581	18456	18217	17978	17739	17349	16679	15429	14064	11120
		1476	6.01	77	20821	20058	19867	19699	19474	19249	19024	18679	18049	17200	15926	13408

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of appurtenances (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.
 *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Cast Aluminum Filtered Supply

RBCF-42—72



Model Number	Motor HP	Fan RPM	Max BHP	Sones @ F.A.	CFM / Static Pressure in Inches WG										
					0.00	0.10	0.125	0.20	0.25	0.375	0.50	0.625	0.75	1.00	1.25
42 Performance					Max RPM H - 1214			Max Motor Frame Size - 215T					TS = RPM x 10.995		
RBCF-3H42-10	1	608	0.75	21	12456	10544	10012	8186	6821	2587					
		668	1.00	25	13685	11981	11502	9962	8796	5400					
		710	1.20	27	14546	12967	12519	11116	10057	7091	3456				
RBCF-3H42-15	1-1/2	765	1.50	29	15672	14237	13823	12562	11648	9077	5957				
		813	1.81	32	16656	15328	14944	13762	12941	10616	7934	4757			
RBCF-3H42-20	2	842	2.01	34	17250	15982	15613	14476	13708	11494	9002	6071			
		894	2.40	37	18315	17146	16798	15737	15015	13039	10854	8309	5367		
RBCF-3H42-30	3	963	3.00	43	19729	18677	18354	17376	16712	14973	12994	10845	8432		
		1024	3.61	46	20978	20014	19715	18801	18180	16599	14812	12917	10761	5815	
RBCF-3H42-50	5	1142	5.01	53	23396	22531	22315	21502	20954	19554	18095	16476	14776	10931	6369
		1214	6.01	58	24871	24057	23854	23124	22611	21305	19974	18537	16950	13570	9614
48 Performance					Max RPM H - 1303			Max Motor Frame Size - 215T					TS = RPM x 12.566		
RBCF-3H48-20	2	718	1.51	32	17780	16003	15497	13944	12690	9025	4360				
		789	2.00	37	19538	17984	17504	16141	15153	12099	8590				
		839	2.41	41	20776	19359	18908	17609	16728	14016	10871	7344			
RBCF-3H48-30	3	904	3.01	45	22386	21128	20710	19483	18692	16461	13694	10612	7030		
		960	3.60	49	23773	22627	22244	21070	20325	18357	15852	13141	10225		
RBCF-3H48-50	5	1071	5.00	58	26522	25495	25238	24189	23492	21824	19991	17635	15253	9938	
		1138	6.00	64	28181	27215	26973	26045	25381	23796	22134	20168	17972	13173	7084
RBCF-3H48-75	7-1/2	1226	7.51	74	30360	29463	29239	28455	27839	26339	24878	23272	21316	17141	12573
		1303	9.01	84	32267	31423	31212	30543	29963	28526	27155	25712	24183	20324	16123
54 Performance					Max RPM H - 844			Max Motor Frame Size - 256T					TS = RPM x 14.135		
RBCF-3H54-30	3	463	1.98	24	22867	20549	19882	17810	16389	10651					
		532	3.01	30	26274	24428	23790	22033	20810	17374	12054	6316			
		565	3.60	33	27904	26251	25650	23959	22843	19936	15601	10639			
RBCF-3H54-50	5	631	5.02	40	31164	29695	29312	27727	26747	24199	21463	17378	12819		
		670	6.01	43	33090	31707	31361	29926	28988	26629	24178	20960	16742		
RBCF-3H54-75	7-1/2	722	7.52	48	35658	34375	34054	32855	31928	29789	27524	25245	21879	14166	
		767	9.01	53	37881	36672	36370	35358	34472	32422	30338	28197	25801	18570	11878
RBCF-3H54-100	10	795	10.03	57	39263	38098	37807	36903	36049	34039	32058	29996	27926	21685	14652
		844	12.00	61	41683	40586	40311	39488	38782	36834	35004	33080	31134	26198	19324
60 Performance					Max RPM H - 763			Max Motor Frame Size - 256T					TS = RPM x 15.691		
RBCF-3H60-50	5	485	3.09	32	38444	34309	33282	30117	27973	21185	14144				
		570	5.01	42	45182	41663	40783	38159	36353	31700	25886	19562			
		606	6.02	48	48036	44726	43898	41426	39767	35477	30611	24426	18963		
RBCF-3H60-75	7-1/2	652	7.51	52	51682	48605	47836	45534	44006	40055	35913	31013	25030		
		693	9.02	57	54932	52037	51314	49143	47706	44033	40282	36069	30977	20978	
RBCF-3H60-100	10	718	10.03	60	56913	54120	53421	51326	49936	46420	42799	38919	34499	24346	
		763	12.04	67	60480	57852	57194	55223	53910	50646	47243	43837	39955	30376	21833
72 Performance					Max RPM H - 766			Max Motor Frame Size - 256T					TS = RPM x 18.802		
RBCF-3H72-75	7-1/2	498	4.95	42	37357	34733	34076	31876	30066	24771	18795	10042			
		572	7.50	51	42908	40623	40052	38337	37049	33193	28196	22988	16911		
		608	9.01	56	45608	43459	42922	41308	40232	36637	31497	27381	22717		
RBCF-3H72-100	10	630	10.02	58	47258	45184	44666	43109	42070	38753	33340	30244	25605	12726	
		670	12.05	62	50259	48309	47821	46358	45381	42536	39227	34389	30469	21090	
RBCF-3H72-150	15	721	15.00	68	54084	52272	51819	50460	49553	47255	44130	41191	36569	28762	18919
		766	18.00	74	57460	55754	55328	54048	53195	51060	48399	45457	40367	34267	26318

Performance certified is for installation type A: free inlet, free outlet. Power rating (BHP) does not include transmission losses. Performance ratings include the effects of aperturancs (2 inch (51 mm) filters). The sound ratings shown are loudness values in fan sones at 5 feet (1.5 m) in a hemispherical free field calculated per AMCA Standard 301. Values shown are for installation type A: free outlet hemispherical sone levels.

*Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program.

Belt Drive Reversible (Exhaust and Supply)

RPBR-24—30



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00
24 Performance					Max RPM = 1635				Max Motor Frame Size - 145T				TS = RPM x 6.307			
RPBR-24-4	1/4	850	0.24	24	4457	3612	3269	2929	2140							
		905	0.29	24	4746	4013	3695	3375	2720							
RPBR-24-3	1/3	940	0.33	24	4929	4262	3961	3650	3034							
		995	0.39	25	5218	4626	4365	4075	3494	2866						
RPBR-24-5	1/2	1025	0.43	25	5375	4804	4581	4303	3737	3169						
		1070	0.48	26	5611	5069	4899	4637	4094	3553	2930					
		1100	0.53	27	5768	5244	5098	4854	4328	3804	3244					
		1135	0.58	28	5952	5448	5306	5105	4599	4090	3576					
RPBR-24-7	3/4	1195	0.68	30	6267	5794	5659	5524	5055	4567	4084	3262				
		1240	0.76	32	6503	6052	5922	5792	5387	4918	4453	3732				
		1295	0.86	34	6791	6366	6241	6117	5783	5341	4892	4221				
RPBR-24-10	1	1330	0.93	36	6974	6563	6443	6322	6032	5606	5167	4515				
		1370	1.02	37	7184	6785	6673	6555	6313	5904	5478	4846	3662			
		1425	1.15	39	7473	7089	6987	6874	6648	6302	5900	5289	4239			
RPBR-24-15	1-1/2	1460	1.23	40	7656	7282	7186	7076	6855	6552	6164	5565	4572			
		1505	1.34	42	7892	7529	7438	7334	7120	6871	6498	5917	4956	3809		
		1550	1.47	44	8128	7775	7687	7591	7383	7175	6824	6265	5333	4288		
		1590	1.60	46	8338	7994	7908	7819	7616	7414	7111	6572	5661	4706		
		1635	1.73	48	8574	8239	8156	8072	7877	7680	7431	6912	6024	5134		
30 Performance					Max RPM = 1450				Max Motor Frame Size - 184T				TS = RPM x 7.919			
RPBR-30-3	1/3	650	0.31	19.5	6943	5328										
		690	0.38	21	7371	6013	5233									
RPBR-30-5	1/2	745	0.47	23	7958	6730	6286	5506								
		805	0.59	26	8599	7493	7163	6686								
RPBR-30-7	3/4	835	0.66	28	8919	7869	7550	7222	5833							
		875	0.76	30	9347	8359	8061	7757	6666							
		920	0.88	33	9827	8904	8628	8339	7548							
RPBR-30-10	1	960	1.01	35	10255	9384	9122	8850	8265	7071						
		1000	1.10	38	10682	9861	9609	9354	8822	7900						
RPBR-30-15	1-1/2	1050	1.32	42	11216	10452	10213	9973	9471	8825	7711					
		1095	1.47	46	11697	10981	10751	10521	10047	9561	8645					
		1145	1.71	51	12231	11547	11344	11125	10679	10215	9574	8021				
RPBR-30-20	2	1180	1.88	52	12605	11941	11757	11544	11118	10667	10198	8749				
		1230	2.12	53	13139	12502	12343	12139	11730	11306	10873	9783				
		1265	2.29	54	13513	12894	12739	12554	12156	11749	11328	10431				
RPBR-30-30	3	1315	2.58	56	14047	13451	13302	13143	12760	12377	11972	11326	9115			
		1360	2.88	57	14528	13952	13808	13664	13299	12929	12545	11958	10049			
		1405	3.16	60	15008	14451	14311	14172	13836	13478	13113	12545	10984			
		1450	3.46	63	15489	14949	14814	14679	14369	14022	13675	13126	11851			

Performance shown is for Model RPBR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program. BHP does not include transmission losses.

Belt Drive Reversible (Exhaust and Supply)

RPBR-36—42



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG													
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00		
36 Performance					Max RPM = 1415				Max Motor Frame Size - 184T				TS = RPM x 9.490					
RPBR-36-5	1/2	625	0.50	21	9602	7847	6731											
		655	0.57	23	10063	8429	7707											
RPBR-36-7	3/4	710	0.73	26	10908	9473	8993	8255										
		750	0.85	29	11522	10203	9763	9244										
RPBR-36-10	1	800	1.05	33	12290	11098	10707	10281	8903									
		830	1.17	35	12751	11629	11253	10855	9786									
RPBR-36-15	1-1/2	875	1.39	38	13443	12418	12062	11704	10892	9151								
		910	1.55	39	13980	13027	12684	12341	11606	10490								
		945	1.74	41	14518	13631	13301	12971	12279	11363	9537							
RPBR-36-20	2	1010	2.11	45	15517	14712	14436	14127	13508	12832	11822							
		1040	2.29	48	15977	15196	14955	14655	14055	13411	12566							
RPBR-36-30	3	1110	2.81	54	17053	16321	16138	15876	15314	14741	14127	12734						
		1150	3.10	58	17667	16961	16784	16568	16025	15482	14897	13734						
		1195	3.45	63	18359	17679	17508	17338	16819	16297	15753	14838						
RPBR-36-50	5	1240	3.94	67	19050	18395	18231	18067	17607	17103	16600	15774	13048					
		1280	4.31	70	19665	19030	18871	18712	18302	17815	17327	16545	14661					
		1325	4.74	74	20356	19742	19589	19436	19081	18610	18139	17403	15787					
		1370	5.33	78	21047	20454	20306	20157	19854	19399	18944	18252	16893	13943				
		1415	5.83	83	21739	21164	21021	20877	20590	20183	19742	19081	17888	15771				
42 Performance					Max RPM = 1180				Max Motor Frame Size - 184T				TS = RPM x 11.061					
RPBR-42-5	1/2	500	0.43	20	11888	7929	6714											
		555	0.59	23	13196	10135	8716	7566										
RPBR-42-7	3/4	585	0.69	25	13909	11025	10066	8687										
		630	0.87	29	14979	12342	11615	10512	8421									
RPBR-42-10	1	665	1.02	32	15812	13406	12647	11969	9631									
		690	1.15	35	16406	14155	13373	12719	10577	8993								
RPBR-42-15	1-1/2	725	1.33	37	17238	15190	14429	13753	12020	10055								
		765	1.56	38	18189	16314	15634	14913	13734	11584	10121							
		795	1.75	40	18903	17100	16525	15831	14635	12700	11045							
RPBR-42-20	2	840	2.09	43	19972	18269	17836	17186	15963	14832	12764	10865						
		875	2.34	47	20805	19171	18756	18224	16979	15949	14099	11889						
RPBR-42-30	3	910	2.62	49	21637	20068	19669	19250	18036	16991	15770	13166						
		950	2.98	52	22588	21088	20706	20323	19247	18164	17215	14677						
		995	3.44	56	23658	22229	21863	21498	20589	19479	18558	16567	13282					
RPBR-42-50	5	1025	3.74	58	24371	22985	22631	22277	21473	20396	19440	17988	14207					
		1065	4.21	62	25322	23988	23650	23309	22627	21605	20603	19333	15745					
		1100	4.65	66	26154	24862	24538	24207	23547	22650	21646	20379	17061	14485				
		1140	5.14	70	27106	25859	25547	25229	24592	23832	22864	21560	18702	15651				
		1180	5.72	75	28057	26852	26551	26246	25631	25002	24067	22725	20603	17195				

Performance shown is for Model RPBR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program. BHP does not include transmission losses.

Belt Drive Reversible (Exhaust and Supply)

RPBR-48—54



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG													
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00		
48 Performance					Max RPM = 1130				Max Motor Frame Size - 215T				TS = RPM x 12.664					
RPBR-48-7	3/4	480	0.70	22	15117	11759	9863	8160										
		520	0.88	24	16377	13482	12394	10401	7791									
RPBR-48-10	1	545	1.03	26	17164	14448	13520	12121	8988									
		560	1.11	27	17636	15022	14185	13130	9689									
RPBR-48-15	1-1/2	615	1.48	32	19368	17071	16371	15607	13017	10316								
		650	1.77	35	20471	18313	17700	17022	15323	11928	10176							
RPBR-48-20	2	680	1.99	38	21415	19368	18815	18175	16682	14030	11595							
		705	2.28	40	22203	20239	19706	19124	17795	15743	12747	10309						
RPBR-48-30	3	755	2.73	44	23777	21967	21469	20971	19827	18415	16065	12718						
		805	3.26	48	25352	23678	23211	22744	21739	20633	19174	15240						
RPBR-48-50	5	830	3.69	50	26139	24527	24074	23621	22682	21620	20305	16988	12697					
		870	4.19	54	27399	25862	25448	25016	24151	23162	22083	19725	14601					
		905	4.84	57	28501	27024	26642	26227	25396	24494	23520	21664	16221	12956				
		940	5.34	61	29604	28181	27825	27430	26630	25811	24873	23240	18335	14775				
RPBR-48-75	7-1/2	975	5.89	65	30706	29334	28992	28627	27856	27085	26211	24791	20761	16432				
		1015	6.76	70	31966	30648	30319	29987	29247	28506	27722	26420	23476	18280	15476			
		1050	7.39	74	33068	31794	31476	31158	30456	29740	29024	27772	25242	20432	17151			
		1090	8.17	80	34328	33101	32794	32487	31831	31141	30451	29301	27040	23206	19021			
		1130	8.82	86	35587	34404	34108	33812	33198	32532	31867	30814	28809	25924	20955			
54 Performance					Max RPM = 830				Max Motor Frame Size - 254T				TS = RPM x 14.380					
RPBR-54-15	1-1/2	400	1.36	22	21919	17308	16286	14889	12572									
		430	1.70	24	23563	19934	18247	17296	15056	12438								
RPBR-54-20	2	455	2.04	26	24933	21732	19940	18947	16737	14760	11949							
		480	2.35	28	26303	23425	22219	20565	18661	16782	14492							
RPBR-54-30	3	505	2.80	31	27673	25051	24045	22449	20536	18466	16757	12966						
		525	3.10	33	28769	26278	25404	24266	21853	19923	18328	15064						
		545	3.43	35	29865	27496	26749	25778	23151	21531	19681	16967						
RPBR-54-50	5	570	4.07	38	31235	29008	28339	27483	24752	23317	21409	19214	13506					
		595	4.54	41	32605	30510	29869	29167	27006	24956	23425	21038	16226					
		620	5.07	44	33974	32003	31388	30773	29124	26570	25251	22717	18739					
		645	5.85	47	35344	33488	32897	32306	30839	28342	26895	24564	21011	15996				
RPBR-54-75	7-1/2	670	6.47	51	36714	34966	34397	33828	32534	30626	28517	26570	23130	18640				
		695	7.43	53	38084	36438	35889	35340	34211	32687	30117	28352	24830	21118	16083			
		725	8.23	57	39728	38152	37670	37144	36092	34742	32737	30322	26834	23838	19482			
		750	8.81	60	41098	39574	39147	38639	37622	36436	34994	31942	28786	25923	22080			
RPBR-54-100	10	770	9.68	63	42194	40710	40325	39830	38840	37779	36404	33224	30390	27286	23927			
		790	10.39	66	43290	41843	41481	41017	40052	39086	37773	34715	31907	28632	25737			
		810	11.62	69	44386	42975	42622	42200	41259	40317	39131	36548	33232	29963	27518	19602		
		830	11.90	73	45482	44105	43760	43380	42461	41542	40480	38359	34546	31493	28973	21740		

Performance shown is for Model RPBR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program. BHP does not include transmission losses. Numbers in blue have a larger BHP and require the next largest size motor.

Belt Drive Reversible (Exhaust and Supply)

RPBR-60—72



Model Number	Motor HP	Fan RPM	Max BHP	*Sones	CFM / Static Pressure in Inches WG											
					0.00	0.10	0.125	0.15	0.20	0.25	0.30	0.375	0.50	0.625	0.75	1.00
60 Performance					Max RPM = 805					Max Motor Frame Size - 254T				TS = RPM x 15.708		
RPBR-60-20	2	440	1.97	30	26801	22934	20935	19685	16982	14113						
		465	2.28	31	28324	24749	23472	21633	19147	16546						
RPBR-60-30	3	480	2.56	32	29238	25826	24765	22781	20422	17930	15228					
		495	2.78	33	30151	26859	25865	24173	21678	19255	16750					
		515	3.09	35	31370	28198	27318	26307	23275	20987	18655					
		530	3.46	36	32283	29197	28398	27437	24444	22269	20014	16247				
RPBR-60-50	5	555	3.91	39	33806	30851	30135	29262	26362	24367	22202	18879				
		580	4.41	42	35329	32493	31808	31066	28817	26352	24345	21252				
		605	4.98	45	36852	34125	33468	32811	31166	28288	26446	23473				
		630	5.76	49	38375	35754	35117	34486	33000	30229	28448	25640	20748			
RPBR-60-75	7-1/2	650	6.26	52	39593	37074	36429	35818	34451	32383	30006	27349	22676			
		670	6.79	55	40811	38388	37735	37142	35891	34371	31545	29033	24566			
		685	7.46	58	41725	39370	38711	38131	36964	35477	32687	30278	25906	21066		
		705	8.06	60	42943	40675	40017	39445	38318	36941	34720	31856	27664	23259		
		725	8.69	64	44161	41977	41336	40753	39657	38393	36852	33414	29396	25188		
RPBR-60-100	10	745	9.36	67	45379	43274	42651	42056	40990	39835	38468	34955	31108	27082		
		765	10.33	71	46598	44568	43961	43355	42316	41266	39935	36480	32800	28888	24768	
		785	11.07	75	47816	45858	45267	44676	43637	42625	41391	38473	34469	30649	26710	
		805	11.85	79	49034	47146	46569	45992	44952	43965	42838	40611	36072	32386	28619	
72 Performance					Max RPM = 705					Max Motor Frame Size - 256T				TS = RPM x 18.848		
RPBR-72-20	2	340	1.90	24	34031	26236	20400									
		360	2.29	26	36033	29279	24290	19836								
RPBR-72-30	3	380	2.66	29	38035	32645	29312	23838								
		395	3.12	30	39537	34778	31605	26730	19246							
		415	3.51	33	41538	36988	34846	31914	22763							
RPBR-72-50	5	430	3.86	36	43040	38632	37354	34212	25790							
		450	4.55	38	45042	40808	39812	37392	29697	22927						
		470	5.07	41	47043	42968	42014	40746	35422	26674						
		490	5.90	44	49045	45114	44200	43285	38511	30662	24621					
RPBR-72-75	7-1/2	510	6.50	47	51047	47249	46370	45491	41539	34519	28232					
		535	7.41	52	53549	49901	49064	48226	45766	41083	33242					
RPBR-72-100	10	555	8.50	56	55551	52013	51205	50398	48783	44148	37112	28724				
		580	9.50	60	58054	54662	53868	53095	51550	48112	44064	33551				
		600	10.50	63	60056	56777	55987	55240	53746	51477	47147	37528				
RPBR-72-150	15	620	11.60	67	62057	58885	58098	57376	55930	54484	50181	41395				
		640	13.00	71	64059	60986	60217	59502	58101	56701	53490	47044	33024			
		660	14.10	75	66061	63081	62336	61620	60262	58904	56846	51051	36772			
		685	15.60	81	68563	65692	64974	64257	62948	61640	60331	54869	41793			
		705	17.60	86	70565	67775	67078	66380	65088	63816	62545	58014	45701	35158		

Performance shown is for Model RPBR without ducts or filters. *Sones shown apply to the highest cataloged CFM at each fan RPM. For selections at other CFM and static pressure points, refer to the CAPS computerized selection program. BHP does not include transmission losses.

Belt Drive - Models RBE, RBS, RBF, RBCE, RBCS and RBCF

Belt-driven, axial type hooded propeller roof fans shall be provided as follows:

Propellers shall be constructed with fabricated steel or cast aluminum blades and hubs. A standard square key and set screw or tapered bushing shall lock the propeller to the motor shaft. All propellers shall be statically and dynamically balanced.

Fan hood and base construction shall be galvanized steel, painted steel or aluminum. Hood panels shall be arched with interlocking ribs. Fan bases shall be low profile except where tall bases are specified. (Where access doors are required for inspection and service of damper and actuator, tall bases should be specified.) Hood support angles shall be heavy-gauge galvanized steel. Birdscreens constructed of 1/2-inch galvanized mesh shall be horizontally mounted in the discharge/intake perimeter of the hood.

Motors shall be permanently lubricated, heavy-duty type, matched to the fan load, and furnished at the specified voltage, phase and enclosure.

Drive frame and panel assemblies shall be galvanized steel or painted steel. Drive frames shall be formed channels and fan panels shall have a deep formed inlet venturi.

Ground and polished steel fan shafts shall be mounted in sealed ball bearing pillow blocks with grease zerks. Bearings shall be selected for a minimum (L_{10}) life in excess of 100,000 hours (L_{50} average life of 500,000 hours) at maximum cataloged operating speeds. Drives shall be sized for a minimum of 150 percent of driven horsepower. Pulleys shall be fully machined cast iron, keyed and securely attached to propeller and motor shafts. Motor sheaves shall be adjustable for final system balancing.

The axial exhaust, supply and filtered supply fans shall bear the AMCA Certified Ratings seal for FEI, Sound and Air Performance.

Fans shall be models RBE, RBS, RBF, RBCE, RBCS, and RBCF as manufactured by Greenheck Fan Corporation, Schofield, Wisconsin, USA.

Reversible - Models RPBR and RPBRF

All hooded reversible roof ventilators shall be belt drive axial type. Propeller construction shall be cast aluminum, airfoil, reversible design. A standard square key and set screw or taper lock bushing shall lock the propeller to the motor shaft. Propellers shall be statically and dynamically balanced.

Fan hood and base construction shall be aluminum, galvanized steel or painted steel as specified. Hood panels shall be arched with interlocking seams for weather protection. Fan bases shall be low profile except where tall bases are specified. (Where access doors are required to service dampers and actuators, tall bases should be specified).

Birdscreens constructed of 1/2-inch galvanized mesh shall be horizontally mounted in the discharge/intake perimeter of the hood. Hood support members shall be heavy-gauge galvanized steel angles.

Motors shall be heavy-duty ball bearing type carefully matched to the fan load and furnished at the specified voltage, phase and enclosure.

Drive frame assemblies shall be constructed of heavy-gauge steel angles. Fan panels shall be heavy-gauge steel with formed flanges and a double venturi.

Safety guards of heavy welded wire construction shall be attached to the underside of the fan panel.

Ground and polished steel fan shafts shall be mounted in sealed ball bearing pillow blocks with grease zerks. Bearings shall be selected for a minimum (L_{10}) life in excess of 100,000 hours (L_{50} average life of 500,000 hours) at maximum cataloged operating speed. A standard square key and set screws or tapered lock bushing shall attach the propeller securely to the fan shaft. Retaining rings shall be provided at each end of the fan shaft. Pulleys shall be of the fully machined cast iron type, keyed and securely attached to the wheel and motor shafts. The motor sheaves shall be adjustable for final system balancing. Drives shall be sized for a minimum of 150 percent of driven horsepower.

Each unit shall bear a permanently affixed nametag with a fan model number, a serial number and a mark. Optional control centers shall bear a nametag with identical information.

Hooded reversible axial roof ventilators shall be belt drive models RPBR and RPBRF (filtered) as manufactured by Greenheck Fan Corporation, Schofield, Wisconsin, USA.

Direct Drive - Models RE2, RS2, RCE3 and RCS3

Direct driven axial type hooded propeller roof fans shall be provided as follows:

Propellers shall be constructed with fabricated steel or cast aluminum blades and hubs. A standard square key and set screw or tapered bushing shall lock the propeller to the motor shaft. All propellers shall be statically and dynamically balanced.

Fan hood and base construction shall be galvanized steel, painted steel or aluminum. Hood panels shall be arched with interlocking ribs.

Fan bases shall be low profile except where tall bases are specified. (Where access doors are required for inspection and service of damper and actuator, tall bases should be specified.) Hood support angles shall be heavy-gauge galvanized steel. Birdscreens constructed of 1/2-inch galvanized mesh shall be horizontally mounted in the discharge/intake perimeter of the hood.

Motors shall be permanently lubricated, heavy-duty type, matched to the fan load, and furnished at the specified voltage, phase and enclosure.

Motor drive frame and panel assemblies shall be galvanized steel or painted steel. Drive frames shall be formed channels and fan panels shall have a deep formed inlet venturi.

The axial exhaust and supply fans shall bear the AMCA Certified Ratings seal for FEI, Sound and Air Performance.

Fans shall be models RE2, RS2, RCE3, and RCS3 as manufactured by Greenheck Fan Corporation, Schofield, Wisconsin, USA.

Reversible - Models RPDR and RPDRF

All hooded reversible roof ventilators shall be direct drive axial type. Propeller construction shall be cast aluminum, airfoil, reversible design. A standard square key and set screw or taper lock bushing shall lock the propeller to the motor shaft. Propellers shall be statically and dynamically balanced.

Fan hood and base construction shall be aluminum, galvanized steel or painted steel as specified. Hood panels shall be arched with interlocking seams for weather protection. Fan bases shall be low profile except where tall bases are specified. (Where access doors are required to service dampers and actuators, tall bases should be specified.)

Birdscreens constructed of 1/2-inch galvanized mesh shall be horizontally mounted in the discharge/intake perimeter of the hood. Hood support members shall be heavy-gauge galvanized steel angles.

Motors shall be heavy-duty ball bearing type carefully matched to the fan load and furnished at the specified voltage, phase and enclosure.

Motor support frame assemblies shall be constructed of heavy-gauge steel angles. Fan panels shall be heavy-gauge steel with formed flanges and a double venturi.

Safety guards of heavy welded wire construction shall be attached to the underside of the fan panel.

Each unit shall bear a permanently affixed nametag with a fan model number, a serial number and a mark. Optional control centers shall bear a nametag with identical information.

Hooded reversible axial roof ventilators shall be direct drive models RPDR and RPDRF (filtered) as manufactured by Greenheck Fan Corporation, Schofield, Wisconsin, USA.

Basics of Fan Selection

The first consideration in any fan selection is the amount of air to be moved and the resistance to this air movement. With specific performance and application criteria in mind, propeller fan selections typically require decisions based on the following criteria:

Belt Drive vs. Direct Drive

Belt drive fans offer the ability to adjust fan speed for system balancing if necessary. They also offer more flexibility in speeds and motor selections. In a cost comparison, belt drive fans are typically less costly than comparable size direct drive fans with low speed motors.

Direct drive fans are often preferred for jobs where maintenance access is difficult. Maintenance costs are generally lower with direct drive fans since there are no belts or bearings to replace and no pulleys to adjust.

Larger Fans vs. Smaller Fans

In most applications, several fans may meet the specified airflow and pressure requirements. Just as larger fans tend to turn slower and generate less sound, they also tend to have higher initial costs but lower operating costs. Smaller fans have more stable performance curves, lower initial costs, higher sound levels and higher operating costs because of their higher speeds.

Low Sound vs. High Static Pressure

Fans selected for high static pressures run at higher speeds and produce higher tip speeds resulting in higher sound levels. Conversely, in low pressure applications fans generally run at lower speeds producing lower sound levels and are recommended for sound sensitive applications.

How Accessories Affect Static Pressure



All accessory losses must be accounted for when calculating the static pressure load for a fan. In reality, dampers and damper guards add very little to the total system pressure when properly installed. This means propeller roof fans can be specified with low-pressure capabilities (below 3/8 in. wg) when used in conjunction with properly applied accessories (as within our installation recommendations).

When fans are over-specified to compensate for losses that do not exist, both cost and sound levels can be higher than necessary. This results primarily from larger motors and higher tip speeds.

Motor Service Factor

Hooded roof fan motors are cooled by the airstream. With an uninterrupted flow of cooling air, motors may operate in the service factor range (up to 20% above the motor nameplate horsepower) without damage due to overheating. Lesser overloads are recommended for applications using totally enclosed or explosion resistant motors.

Belt drive performance tables in this catalog show two RPM selections for each propeller type (L or H) at a given motor horsepower. The first selection is a 1.0 brake horsepower (BHP) service factor. The second speed selection is at 1.2 Bhp service factor. Direct drive performance tables show BHP levels with service factors ranging up to 1.2 Bhp. When a selection at 1.2 Bhp service factor is not desirable for the application, specify the next higher motor horsepower.



Our Commitment

As a result of our commitment to continuous improvement, Greenheck reserves the right to change specifications without notice.

Specific Greenheck product warranties are located on greenheck.com within the product area tabs and in the Library under Warranties.

