


TECHNICAL DATA

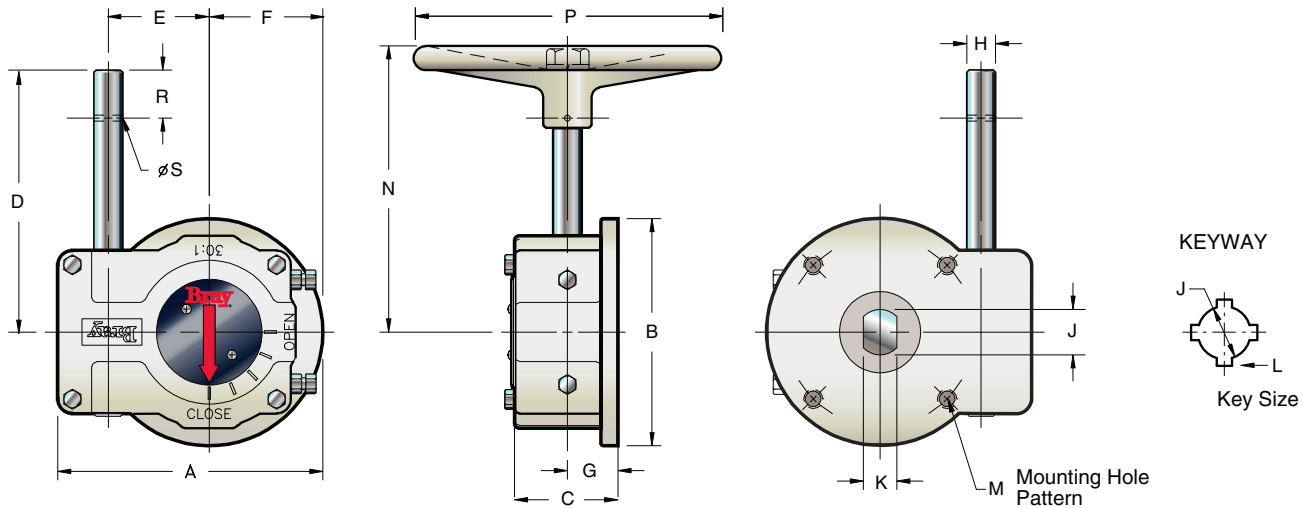

Unit Size	Ratio	Torque Output lb. in. [Nm]	DIMENSIONS SERIES 4 Stainless Steel Gear Operator - Inches [mm]																					
			A	B	C	D	E	F	G	H	J	K	L	Mounting Holes Pattern				Weight lb. [Kg]	N		P		R	S
														BC	No Holes	Threads UNC 28	Depth		STD	OPT	STD	OPT		
0200	20:1	2,000 [226]	4.53 [115]	3.50 [90]	2.56 [65]	4.72 [120]	1.62 [41]	1.75 [45]	1.44 [37]	.63 [16]	0.75 [19]	.51 [13]	-	2.76 [70]	4	.31-18 [M8x1.25]	.50 [13]	9.8 [4.5]	5.34 [136]	-	8 [203]	-	1.25 [32]	.156 [4]
0300	30:1	8,000 [904]	6.89 [175]	5.91 [150]	2.50 [64]	6.87 [175]	2.62 [67]	2.95 [75]	1.25 [32]	.75 [19]	**1.18 [30]	.87 [22]	-	4.92 [125]	4	.50-13 [M8x1.25]	.63 [16]	15.8 [7.2]	7.50 [191]	7.69 [195]	8 [203]	12 [305]	1.25 [32]	.156 [4]
0300	30:1	8,000 [904]	6.89 [175]	5.91 [150]	2.50 [64]	6.87 [175]	2.62 [67]	2.95 [75]	1.25 [32]	.75 [19]	**1.38 [35]	-	.39X.39 [10x10]	4.92 [125]	4	.50-13 [M12x1.75]	.63 [16]	15.8 [7.2]	7.50 [191]	7.69 [195]	8 [203]	12 [305]	1.25 [32]	.156 [4]
0500	50:1	13,000 [1469]	7.53 [191]	5.91 [150]	3.28 [83]	11.00 [279]	3.12 [79]	2.95 [75]	1.69 [43]	.75 [19]	1.38 [35]	-	.39X.39 [10x10]	4.92 [125]	4	.50-13 [M12x1.75]	.75 [19]	29.0 [13.2]	11.81 [300]	-	12 [305]	-	1.62 [41]	.188 [5]
0800	80:1	24,000 [2710]	10.51 [267]	8.27 [210]	4.39 [112]	14.00 [356]	4.56 [116]	4.14 [105]	2.38 [60]	1.00 [25]	**1.97 [50]	-	.47X.39 [12x10]	6.50 [165]	4	.75-10 [M20x2.5]	1.00 [25]	62.5 [28.4]	14.81 [376]	14.88 [378]	12 [305]	18 [305]	1.62 [41]	.188 [5]
0800	80:1	24,000 [2710]	10.51 [267]	8.27 [210]	4.39 [112]	14.00 [356]	4.56 [116]	4.14 [105]	2.38 [60]	1.00 [25]	**2.50 [64]	-	.62X.62 [16x16]	6.50 [165]	4	.75-10 [M20x2.5]	1.00 [25]	69.8 [31.7]	14.88 [376]	-	18 [305]	-	1.50 [38]	.250 [6]

* FKM is the ASTM D1418 designation for Fluorinated Hydrocarbon.

** Size 0300 has a double D and a keyway connection
Size 0800 has 2 keyway size variations



All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved.



A Division of BRAY INTERNATIONAL, Inc.
13333 Westland East Blvd. Houston, Texas 77041
281.894.5454 FAX 281.894.9499 www.bray.com

Patents applied for in U.S. and foreign countries.
Bray® is a registered trademark of BRAY INTERNATIONAL, Inc.

© 2009 Bray International. All rights reserved.

B-1026_EL_SERIES 4_ 2009-12