

## Application

QB-24 is a refractory thermal blanket consisting of a non-asbestos high temperature ceramic fiber blanket covered with quilted fiberglass cloth. This quilted thermal blanket material is listed with UL to be used as an accessory to Greenheck's ceiling radiation dampers or to be used as a batt and blanket material.

## Specifications

**Color**

Gray

**Nominal Density**10-12lb/ft<sup>3</sup> (160-192 kg/m<sup>3</sup>)**Use Temperature Limit**


2300°F (1260°C)

**Melting Point**

3200°F (1760°C)

**Thickness**

0.10 in. (2.5mm)

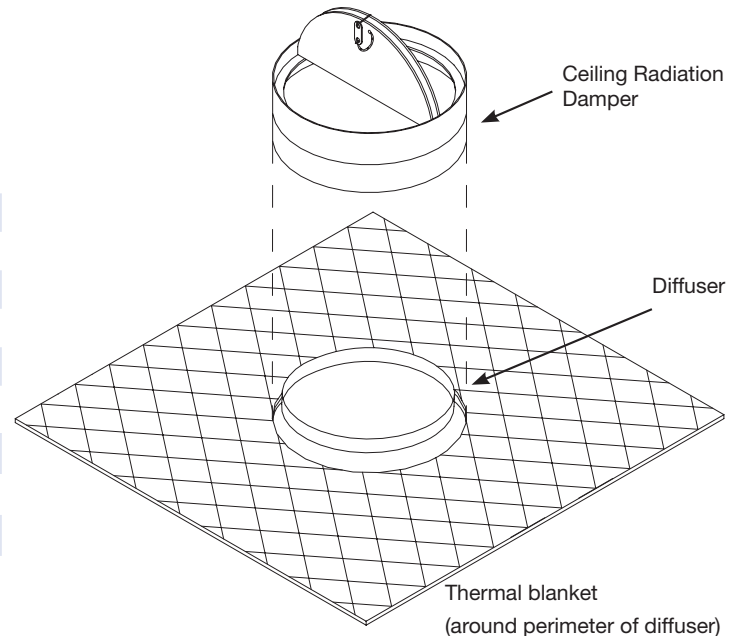

Stock size available is 24 in. x 24 in. (610mm x 610mm).