

### Application

Model SMD-201M is a leakage rated modulating smoke damper with 3V style blades. Model SMD-201M may be installed vertically (with blades running horizontally) or horizontally and is rated for airflow and leakage in either direction.

### Ratings

#### UL 555S Leakage Rating

Leakage Class: I

Operational Rating: Actual ratings are size dependent

Velocity: Up to 2000 fpm (10.2 m/s)

Pressure: Up to 4 in. wg (1 kPa)

Temperature: Up to 250°F (121°C) - depending upon the actuator

### Construction

|                          | Standard  |
|--------------------------|---|
| Frame Material           | Galvanized steel                                    |
| Frame Material Thickness | 16 ga. (1.5mm)                                      |
| Frame Type               | 5 in. x 1in.<br>(127mm x 25mm)<br>hat channel       |
| Blade Material           | Galvanized steel                                    |
| Blade Material Thickness | 16 ga. (1.5mm)                                      |
| Blade Type               | 3V  |
| Blade Action             | Parallel  |
| Linkage                  | Plated steel out of airstream,<br>concealed in jamb |
| Axle Bearings            | 316SS   |
| Axle Material            | Plated steel  |
| Blade Seals              | Silicone  |
| Jamb Seals               | Stainless Steel                                     |

#### Note:

The frames are constructed with reinforced corners. Low profile head and sill are used on sizes less than 17 in. (432mm) high for lower pressure drop and improved damper performance.



W&H dimensions furnished approximately ¼ in. (6mm) undersize. (Add sleeve thickness for overall sleeved damper dimension) Actuator is shown as left hand internal. External is available.



See complete marking on product.  
UL 555S Classification  
R13317

Model SMD-201M meets the requirements for smoke dampers established by:

**National Fire Protection Association**  
NFPA Standards 90A, 92, 101 & 105

**IBC International Building Codes**

**CSFM California State Fire Marshal**  
Leakage (Smoke) Damper Listing (#3230-0981:104)

| W x H                            | Minimum Size | Maximum Size   |                  |
|----------------------------------|--------------|----------------|------------------|
|                                  |              | Single Section | Multiple Section |
| <b>4 in. wg (1 kPa) pressure</b> |              |                |                  |
| <b>Inches</b>                    | 6 x 6        | 36 x 36        | 72 x 72          |
| <b>mm</b>                        | 152 x 152    | 914 x 914      | 1829 x 1829      |

## Options

---

- [Breakaway connections](#)
- Clean wrap
- [Greenheck test switches \(GTS\)](#)
- [Grille tabs](#)
- [Momentary test switch](#)
- [Retaining angles](#)
- [OCI \(Open closed indication switches\)](#)
- Sealed transitions and sleeves
- [Security bars](#)
- Smoke detectors
- Transitions: C, O, R

## Document Links

---



[INSTALLATION](#)



[CATALOG](#)



[DAMPER  
SELECTION GUIDE](#)




[SPECIFICATIONS](#)



[WARRANTY](#)

# Pressure Drop

AMCA Figure 5.2

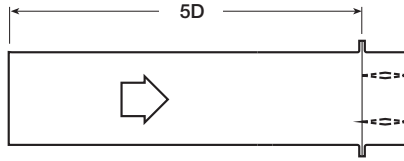

12 in. x 12 in. (305mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.04                   |
| 1000           | 0.14                   |
| 1500           | 0.31                   |
| 2000           | 0.55                   |
| 2500           | 0.86                   |
| 3000           | 1.24                   |
| 3500           | 1.69                   |
| 4000           | 2.20                   |

24 in. x 24 in. (610mm x 610mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.02                   |
| 1000           | 0.07                   |
| 1500           | 0.16                   |
| 2000           | 0.29                   |
| 2500           | 0.45                   |
| 3000           | 0.65                   |
| 3500           | 0.89                   |
| 4000           | 1.16                   |

36 in. x 36 in. (914mm x 914mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.01                   |
| 1000           | 0.04                   |
| 1500           | 0.09                   |
| 2000           | 0.16                   |
| 2500           | 0.25                   |
| 3000           | 0.36                   |
| 3500           | 0.49                   |
| 4000           | 0.64                   |


12 in. x 48 in. (305mm x 1219mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.01                   |
| 1000           | 0.06                   |
| 1500           | 0.13                   |
| 2000           | 0.23                   |
| 2500           | 0.36                   |
| 3000           | 0.52                   |
| 3500           | 0.70                   |
| 4000           | 0.92                   |

48 in. x 12 in. (1219mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.03                   |
| 1000           | 0.10                   |
| 1500           | 0.23                   |
| 2000           | 0.41                   |
| 2500           | 0.63                   |
| 3000           | 0.91                   |
| 3500           | 1.24                   |
| 4000           | 1.62                   |

AMCA Figure 5.3

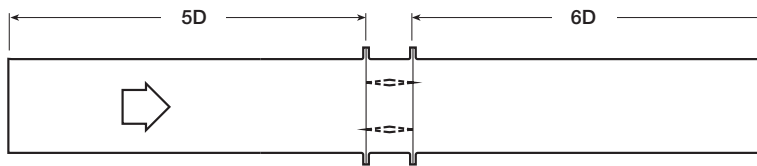

12 in. x 12 in. (305mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.02                   |
| 1000           | 0.09                   |
| 1500           | 0.20                   |
| 2000           | 0.36                   |
| 2500           | 0.56                   |
| 3000           | 0.81                   |
| 3500           | 1.10                   |
| 4000           | 1.44                   |

24 in. x 24 in. (610mm x 610mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.01                   |
| 1000           | 0.04                   |
| 1500           | 0.09                   |
| 2000           | 0.16                   |
| 2500           | 0.25                   |
| 3000           | 0.35                   |
| 3500           | 0.48                   |
| 4000           | 0.63                   |

36 in. x 36 in. (914mm x 914mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.01                   |
| 1000           | 0.03                   |
| 1500           | 0.06                   |
| 2000           | 0.11                   |
| 2500           | 0.17                   |
| 3000           | 0.24                   |
| 3500           | 0.33                   |
| 4000           | 0.42                   |


12 in. x 48 in. (305mm x 1219mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.01                   |
| 1000           | 0.04                   |
| 1500           | 0.10                   |
| 2000           | 0.17                   |
| 2500           | 0.27                   |
| 3000           | 0.39                   |
| 3500           | 0.53                   |
| 4000           | 0.70                   |

48 in. x 12 in. (1219mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.02                   |
| 1000           | 0.07                   |
| 1500           | 0.16                   |
| 2000           | 0.29                   |
| 2500           | 0.45                   |
| 3000           | 0.64                   |
| 3500           | 0.88                   |
| 4000           | 1.14                   |

AMCA Figure 5.5

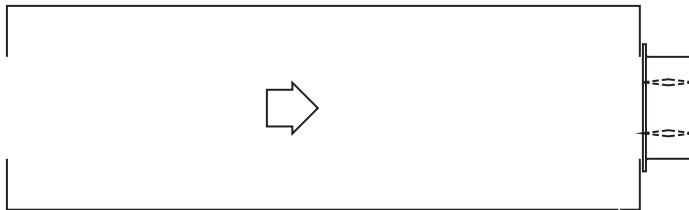

12 in. x 12 in. (305mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.06                   |
| 1000           | 0.22                   |
| 1500           | 0.50                   |
| 2000           | 0.89                   |
| 2500           | 1.39                   |
| 3000           | 2.00                   |
| 3500           | 2.72                   |
| 4000           | 3.55                   |

24 in. x 24 in. (610mm x 610mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.03                   |
| 1000           | 0.14                   |
| 1500           | 0.31                   |
| 2000           | 0.54                   |
| 2500           | 0.85                   |
| 3000           | 1.22                   |
| 3500           | 1.66                   |
| 4000           | 2.17                   |

36 in. x 36 in. (914mm x 914mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.03                   |
| 1000           | 0.12                   |
| 1500           | 0.26                   |
| 2000           | 0.46                   |
| 2500           | 0.73                   |
| 3000           | 1.05                   |
| 3500           | 1.42                   |
| 4000           | 1.86                   |

12 in. x 48 in. (305mm x 1219mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.03                   |
| 1000           | 0.13                   |
| 1500           | 0.30                   |
| 2000           | 0.53                   |
| 2500           | 0.83                   |
| 3000           | 1.19                   |
| 3500           | 1.62                   |
| 4000           | 2.11                   |

48 in. x 12 in. (1219mm x 305mm)

| Velocity (fpm) | Pressure Drop (in. wg) |
|----------------|------------------------|
| 500            | 0.04                   |
| 1000           | 0.17                   |
| 1500           | 0.38                   |
| 2000           | 0.67                   |
| 2500           | 1.04                   |
| 3000           | 1.50                   |
| 3500           | 2.05                   |
| 4000           | 2.67                   |



Greenheck Fan Corporation certifies that the model SMD-201M shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Programs. The AMCA Certified Ratings Seal applies to air performance ratings only.


# Space Envelopes

Externally mounted actuators always require space outside of the damper sleeve. The “S” dimension illustrates the clearance required for various available actuators.

Worst case space envelopes shown below. Exact dimensions may vary based on specific damper configuration. Consult factory for specific space envelope if necessary.


| Actuator Type/Model      | B*                    | T*                    | S             |               |
|--------------------------|-----------------------|-----------------------|---------------|---------------|
|                          | With OCI, RRL, or TOR | With OCI, RRL, or TOR | Piggy back    |               |
|                          |                       |                       | No            | Yes           |
| FSAFB24 SR(-S)<br>Belimo | 1½ in. (38mm)         | 9¼ in. (235mm)        | 6 in. (152mm) | 9 in. (229mm) |

\*These dimension are 0 in. for damper heights of 18 in. (457mm) or more.

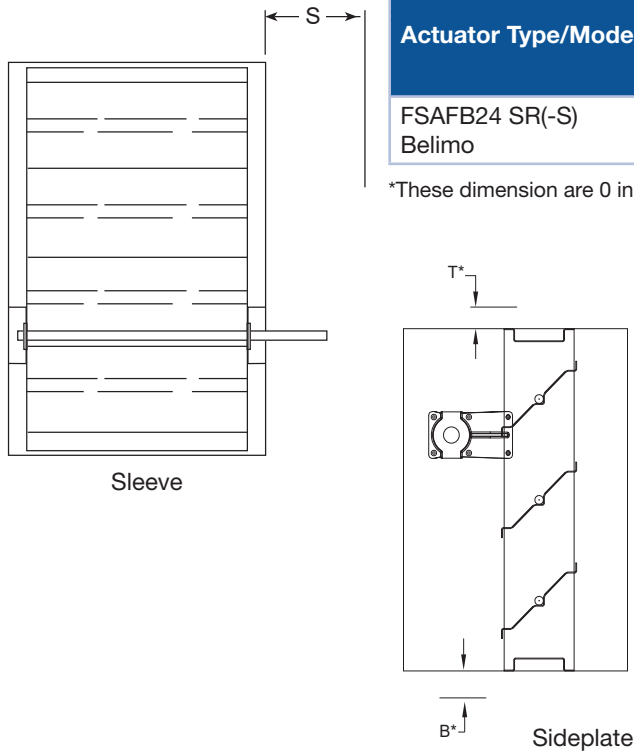

# Contained Actuator Option



Dampers can be ordered with a “contained actuator option”. This option will result in the actuator being oriented such that it extends no more than 1½ inches above or below the sleeve. Note that some damper configurations that are 11 inches high or less will have the OCI mounted on the side opposite the actuator when the contained actuator option is selected.

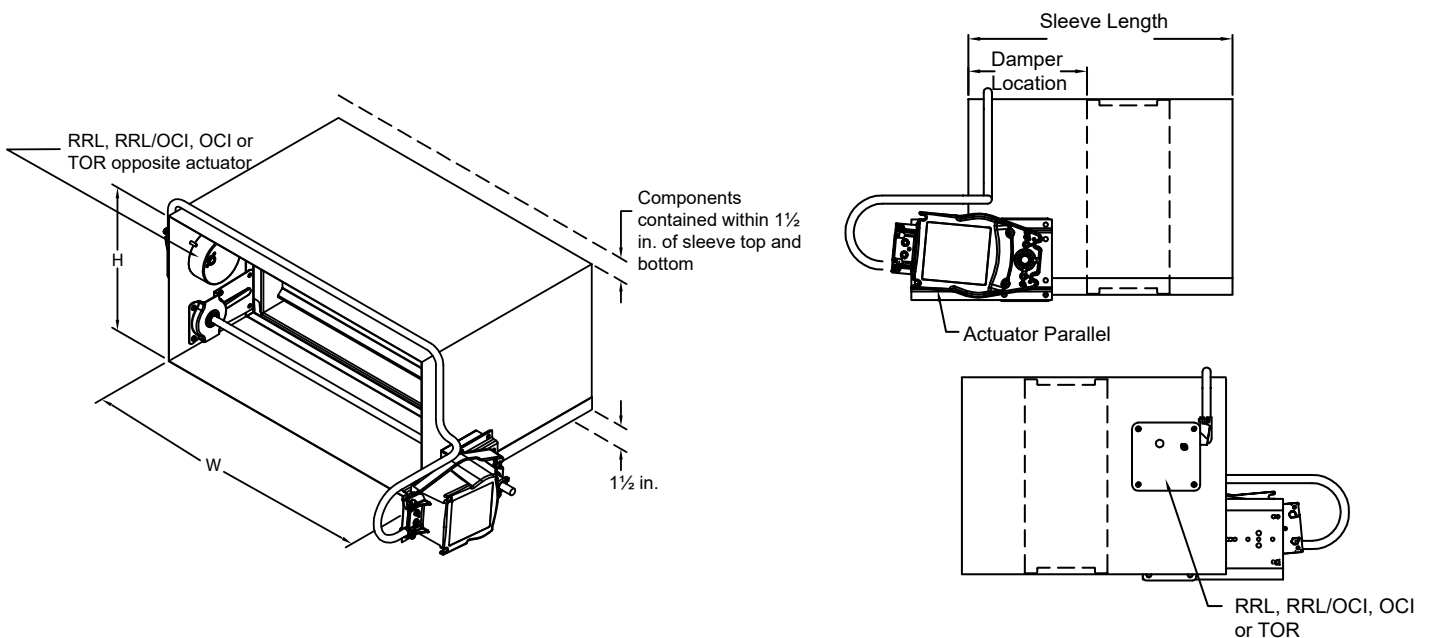

## Sleeve and Sideplate Dimensions

The drawings below and corresponding table show the position of the SMD-201M damper when mounted in a factory sleeve ("A" dimension). The standard mounting locations provide enough space for the mounting of actuators, controls and allow space for installation of retaining angles and duct connections. The following options may affect the range of available mounting locations: smoke detector, NEMA 7 enclosure, transitions, security bars, grille tabs.

The standard location of a damper mounted in a factory sleeve ("A" dimension) is shown below. The damper can be positioned at other locations within a range of 6 in. (152mm) to 16 in. (406mm) for the "A" dimension.

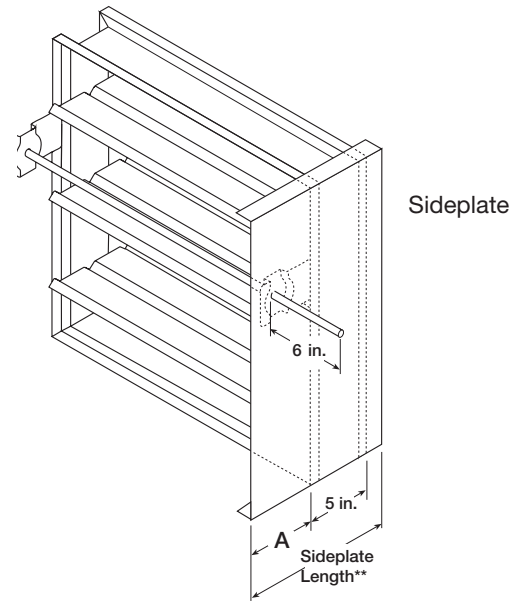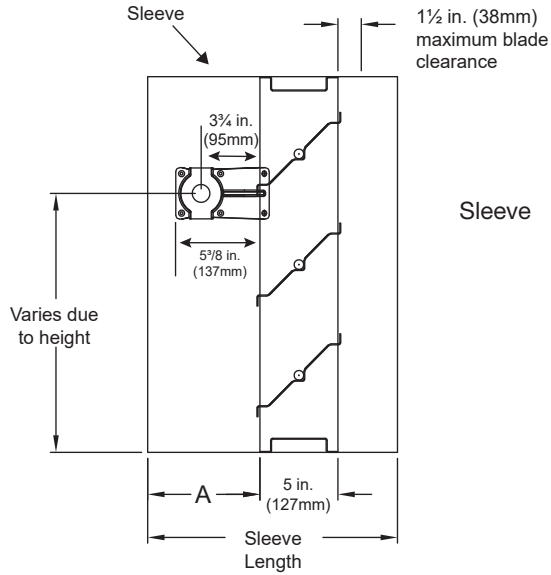


| in. (mm)                     | With Sleeve                              |                             | Sideplate Damper Location "A"        |
|------------------------------|--|-----------------------------|--------------------------------------|
|                              | Minimum Damper Location "A"              | Maximum Damper Location "A" |                                      |
| Dampers with no OCI          | 7 <sup>3</sup> / <sub>16</sub> in. (183) | 16 (406)                    | 6 <sup>3</sup> / <sub>16</sub> (157) |
| Height < 12 in. (305)<br>OCI | 12 (305)                                 | 16 (406)                    | 12 (305)                             |
| Height ≥ 12 in. (305)<br>OCI | 7 <sup>3</sup> / <sub>16</sub> in. (183) | 16 (406)                    | 12 (305)                             |

**NOTE:** Entire damper frame is not required to be installed within the wall. The damper blades, when closed should be contained within the wall.

## Transitioned Damper Dimensions


When a smoke damper is being used in conjunction with round or oval ductwork, the SMD-201M can be supplied in a factory sleeve with round or oval transitions on both ends of the sleeve. Dampers should be ordered to the duct dimensions. Drawings below show overall damper size.

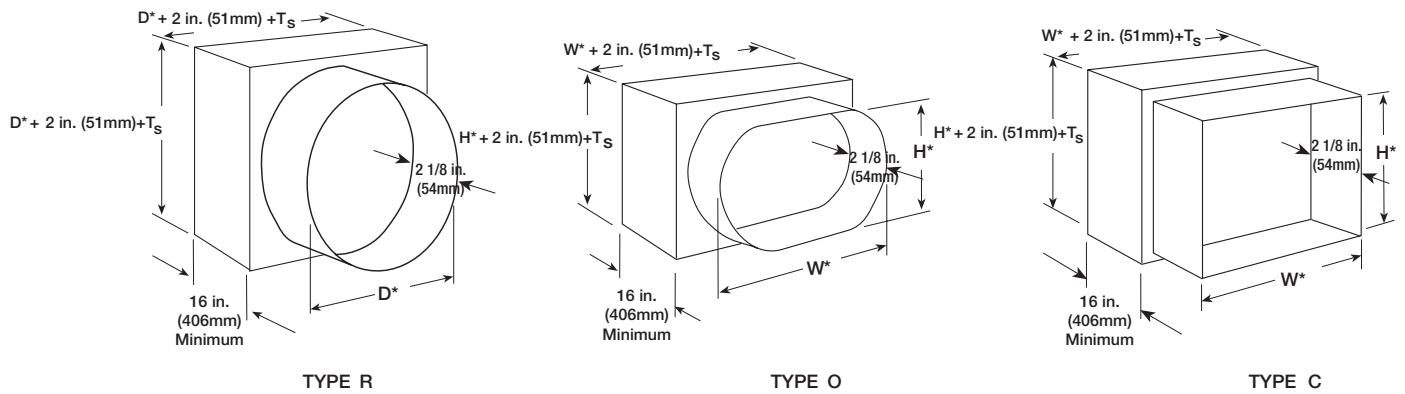

## Multiple Section Dampers

Dampers larger than maximum single section size are supplied as a factory assembly of two or more sections of equal size. The following figures show maximum damper section size and assembly configurations for multi-section dampers.

**2 sections wide**

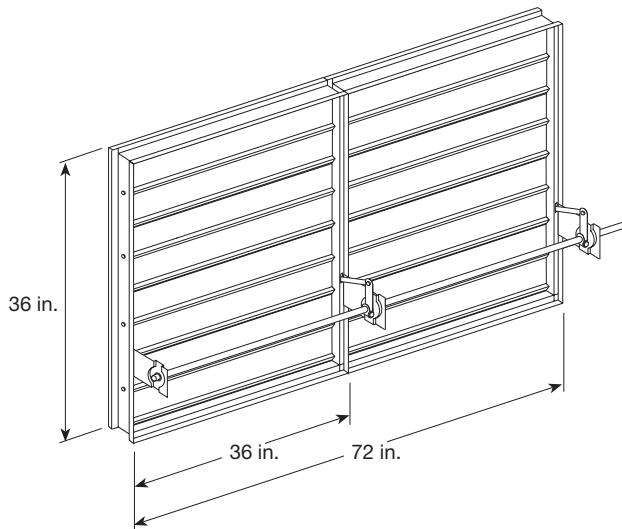

**2 sections wide  
2 sections high**

