

Application

The VCD-42 is a low leakage damper with extruded aluminum airfoil blades and galvanized steel frame. Smooth profile extruded aluminum airfoil blades insure the lowest resistance to airflow in HVAC systems. The VCD-42 is intended for application in medium to high pressure and velocity systems.

VCD-42 is IECC (International Energy Conservation Code) compliant with a leakage rating of 3 cfm/ft² at 1 in. wg (55 cmh/m² at .25 kPa) or less.

Damper Ratings

Velocity

Up to 6000 fpm (30.5 m/s)

Leakage

6 cfm/ft² at 4 in. wg (110 cmh/m² at 1 kPa)

3 cfm/ft² at 1 in. wg (55 cmh/m² at .25 kPa)

Pressure

Up to 6 in. wg (1.5 kPa) pressure differential

Temperature

-40°F to 250°F (-40°C to 121°C).

Construction

| | Standard | Optional |
|------------------------|--|--|
| Frame Material | Galvanized Steel | 304SS |
| Frame Thickness | 16 ga. (1.5 mm) | 12 ga. (2.7 mm)* |
| Frame Type | 5 in. x 1 in. (127mm x 25mm) hat channel | Single flange, Reversed flange, Double flange |
| Blade Material | Extruded Aluminum (6063T5) | - |
| Blade Type | Airfoil | - |
| Blade Action | Opposed | Parallel |
| Linkage | Plated steel out of airstream, concealed in jamb | 316SS |
| Axle Bearings | Synthetic (acetal) sleeve | 316SS |
| Axle Material | Plated steel | 316SS |
| Blade Seals | TPE | Silicone |
| Jamb Seals | Stainless Steel | - |
| Finish | Mill finish | Baked Enamel, Hi Pro Polyester, Industrial Epoxy |

*When 12 ga. frame is selected and the damper height is less than 17 inches, low profile top and bottom frame members are utilized. These low profile frame members will be made from 16 ga. material.




*W&H dimension furnished approximately 1/4 in. (6mm) undersize.

Size Limitations

| W x H | Minimum Size | Maximum Size | |
|---------------|--------------|----------------|------------------|
| | | Single Section | Multiple Section |
| Inches | 6 x 6 | 60 x 74 | Unlimited |
| mm | 152 x 152 | 1524 x 1880 | Unlimited |

Blade Operation

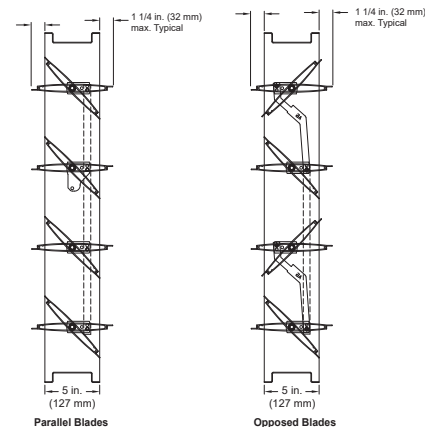


Notes:

- Low profile head and sill are used on sizes less than 17 in. (432mm) high
- Electric actuator and manual quadrant available. Factory supplied actuators are sized for 1500 fpm (7m/s) and fully closed differential pressure of 2 in. wg (.5 kPa). Contact factory for actuator sizing on applications exceeding those limits.
- In applications where airflow could be uneven, such as a discharge fan, it is imperative to verify that at no point the maximum velocity exceeds the damper's cataloged velocity.
- Blades must be horizontal for either horizontal or vertical mount.

Options

- Actuators (24V, 120V, manual, pull chain)
- Actuator mounting (external, external kit (field assembly), internal)
- Flanges
- NEMA enclosures (3, 4, 4X, 7)
- [Retaining angles](#)
- Transformers

Flange options

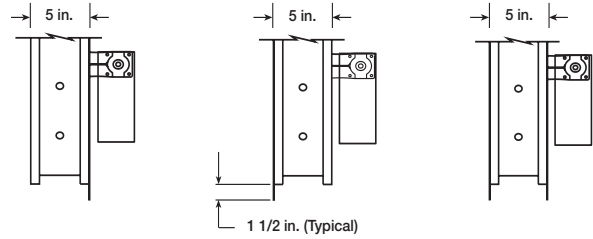

Single Flange

Reversed Flange

Double Flange

Shown with optional internally mounted actuator.

Document Links



[INSTALLATION](#)



[CATALOG](#)



[SELECTION GUIDE](#)



[SPECIFICATIONS](#)



[WARRANTY](#)

Pressure Drop Data

This pressure drop testing was conducted in accordance with AMCA Standard 500-D using the three configurations shown. All data has been corrected to represent standard air at a density of 0.075 lb/ft³ (1.201 kg/m³).


Actual pressure drop found in any HVAC system is a combination of many factors. This pressure drop information along with an analysis of other system influences should be used to estimate actual pressure losses for a damper installed in a given HVAC system.

AMCA Test Figures

Figure 5.3 Illustrates a fully ducted damper. This configuration has the lowest pressure drop of the three test configurations because entrance and exit losses are minimized by straight duct runs upstream and downstream of the damper.

Figure 5.2 Illustrates a ducted damper exhausting air into an open area. This configuration has a lower pressure drop than Figure 5.5 because entrance losses are minimized by a straight duct run upstream of the damper.


Figure 5.5 Illustrates a plenum mounted damper. This configuration has the highest pressure drop because of extremely high entrance and exit losses due to the sudden changes of area in the system.

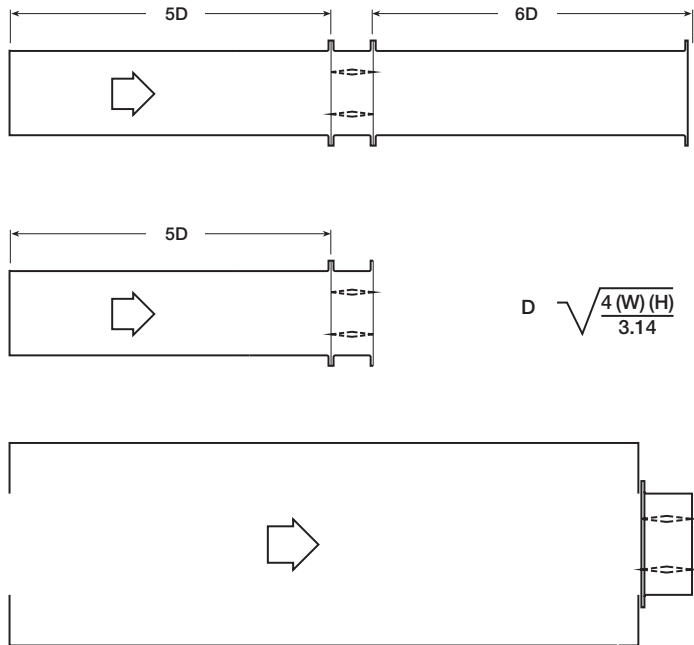


| Dimension inches | 12x12 | | | 24x24 | | | 36x36 | | | 12x48 | | | 48x12 | | |
|-------------------|----------------------|------|------|-------|-----|------|-------|-----|------|-------|-----|------|-------|------|------|
| | 5.2 | 5.3 | 5.5 | 5.2 | 5.3 | 5.5 | 5.2 | 5.3 | 5.5 | 5.2 | 5.3 | 5.5 | 5.2 | 5.3 | 5.5 |
| AMCA figure | Pressure Drop in. wg | | | | | | | | | | | | | | |
| Velocity (ft/min) | | | | | | | | | | | | | | | |
| 500 | .05 | .03 | .07 | .01 | .01 | .04 | .01 | .01 | .02 | .01 | .01 | .03 | .03 | .02 | .05 |
| 1000 | .18 | .12 | .28 | .05 | .03 | .17 | .04 | .02 | .12 | .01 | .04 | .18 | .11 | .06 | .19 |
| 1500 | .43 | .28 | .62 | .12 | .06 | .37 | .09 | .05 | .28 | .14 | .09 | .40 | .25 | .14 | .44 |
| 2000 | .76 | .49 | 1.11 | .22 | .11 | .66 | .17 | .08 | .50 | .25 | .16 | .72 | .44 | .25 | .78 |
| 2500 | 1.19 | .77 | 1.73 | .34 | .17 | 1.04 | .26 | .13 | .78 | .39 | .25 | 1.12 | .69 | .39 | 1.21 |
| 3000 | 1.71 | 1.11 | 2.50 | .49 | .24 | 1.50 | .38 | .19 | 1.13 | .57 | .36 | 1.62 | 1.0 | .57 | 1.75 |
| 3500 | 2.33 | 1.51 | 3.41 | .66 | .33 | 2.04 | .51 | .26 | 1.53 | .77 | .49 | 2.21 | 1.36 | .77 | 2.38 |
| 4000 | 3.04 | 1.98 | 4.45 | .87 | .43 | 2.66 | .67 | .34 | 2.01 | 1.01 | .64 | 2.88 | 1.78 | 1.01 | 3.11 |

Leakage


Damper leakage (with blades fully closed) varies based on the type of low leakage seals applied. Model VCD-42 is available with silicone blade seals and stainless steel jamb seals. Leakage testing was conducted in accordance with AMCA Standard 500-D and is expressed as cfm/ft² of damper face area. All data has been corrected to represent standard air at a density of 0.075 lb/ft³ (1.201 kg/m³).

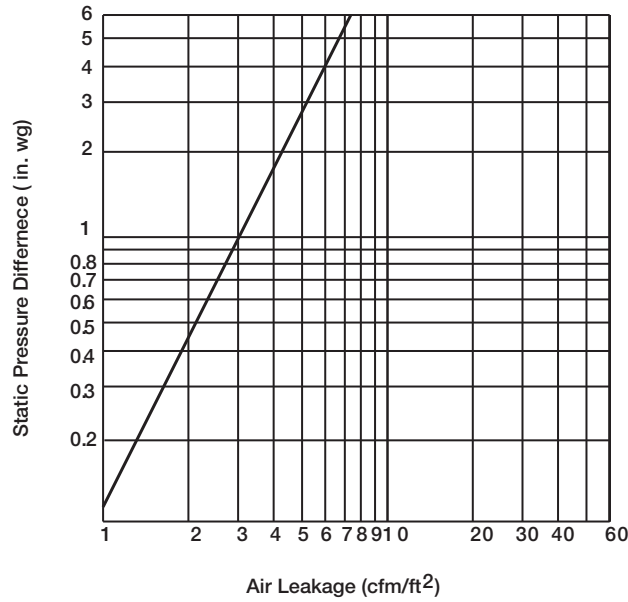

Pressure Limitations

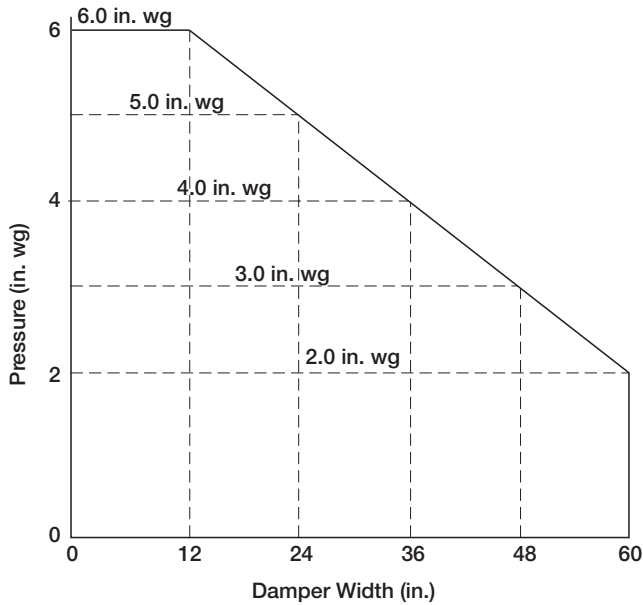

Velocity Limitations

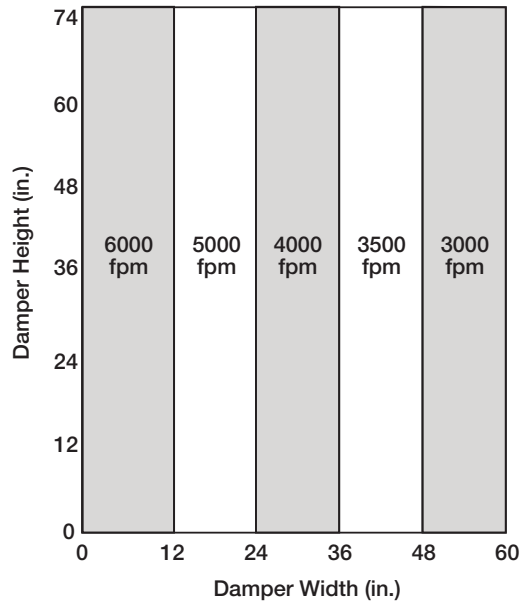


Temperature Limitations

| Blade Seal | Temperature Range |
|------------|---------------------------------|
| TPE | -10°F to 180°F (-23°C to 82°C) |
| Silicone | -40°F to 250°F (-40°C to 121°C) |

NOTE: VCD-42 will withstand higher pressures and velocities. Displayed ratings are conservative to prevent misapplication. Consult factory if you have an application outside these limitations.

Space Envelopes

On dampers less than 18 in. (457mm) high, actuators may also require clearances above and/or below the damper frame. “B” and “T” dimensions are worst case clearance requirements for some dampers less than 18 in. (457mm) high. All damper sizes under 18 in. (457mm) high do not require these worst case clearances. If space availability above or below the damper is limited, each damper size should be individually evaluated.

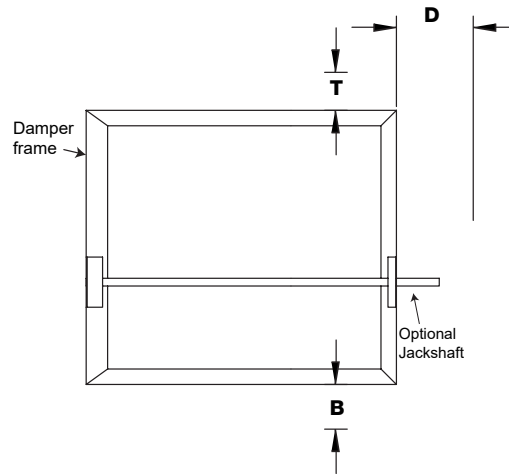


| Actuator Type/Model | Height | T | B | D |
|---|------------|--------|--------------------------------|-------------------------------|
| | Inches | Inches | | |
| AFBUP (-S) and FSNF Series, Belimo MSxx20 Series, Honeywell | ≥6 to <10 | 0 | 12 ³ / ₄ | 6 ¹ / ₄ |
| | ≥10 to <18 | 0 | 2 | 6 ¹ / ₄ |
| | ≥18 | 0 | 0 | 6 ¹ / ₄ |
| FSLF, LF and TFB Series, Belimo | ≥6 to <10 | 0 | 3 ¹ / ₂ | 6 ¹ / ₄ |
| | ≥10 | 0 | 0 | 6 ¹ / ₄ |
| MSxx04 & MSxx09 Series, Honeywell | ≥6 to <9 | 0 | 4 ³ / ₄ | 6 ¹ / ₄ |
| | ≥9 | 0 | 0 | 6 ¹ / ₄ |
| MS75xx Series, Honeywell | ≥6 to <10 | 0 | 12 ³ / ₄ | 6 ¹ / ₄ |
| | ≥10 to <18 | 0 | 7 | 6 ¹ / ₄ |
| | ≥18 | 0 | 0 | 6 ¹ / ₄ |
| GRD and GVD Series, Siemens | ≥6 to <10 | 0 | 12 ³ / ₄ | 6 ¹ / ₄ |
| | ≥10 to <18 | 0 | 2 | 6 ¹ / ₄ |
| | ≥18 | 0 | 0 | 6 ¹ / ₄ |
| GJD Series, Siemens | ≥6 to <10 | 0 | 3 ¹ / ₂ | 6 ¹ / ₄ |
| | ≥10 to <18 | 0 | 0 | 6 ¹ / ₄ |
| | ≥18 | 0 | 0 | 6 ¹ / ₄ |

Actuator Mounting

Actuators may be installed at the factory, shipped loose with the necessary linkage and brackets for mounting, or field supplied. For more detail information on actuator mounting, click on link below or scan QR code.



[ACTUATOR MOUNTING](#)

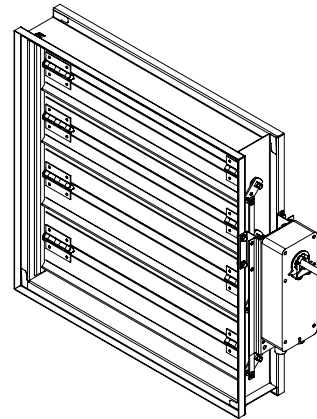


Non-jackshaft external right

Clearance Requirements

This drawing depicts the worst case clearance requirements for an actuator with a jackshaft.


| Internal mount only Actuator model | A | B | C |
|---------------------------------------|--------------------|-------------------|--------------------|
| All except - EFB & EFCX Series | 7 ¾ in (197 mm) | 3 ¾ in (95 mm) | 5 ⅜ in (137 mm) |
| EFB & EFCX Series | 8 ½ in (216 mm) | 6 in (152mm) | 8 ½ in (216 mm) |

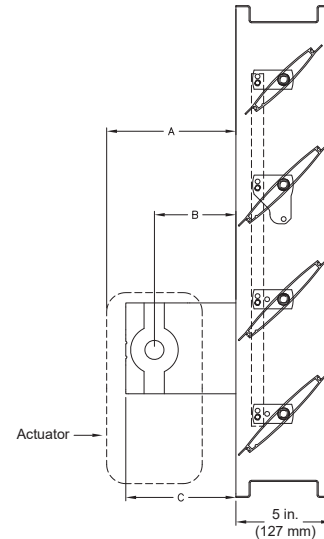


Multi-Section Dampers

Dampers larger than the maximum single section size, will be made up of a multiple of equal size sections.

Note: Dampers larger than 60 in. x 74 in. (1524mm x 1880mm) are not intended to be structurally self supporting. Refer to IOM document 463384 for structural support requirements on multi-section assemblies.

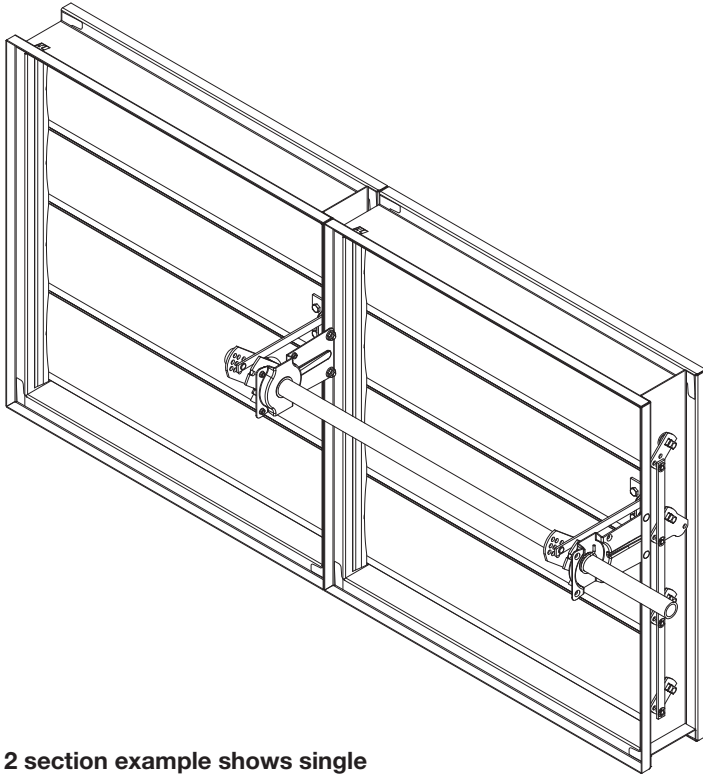

2 section example shows single jackshaft driving multiple sections

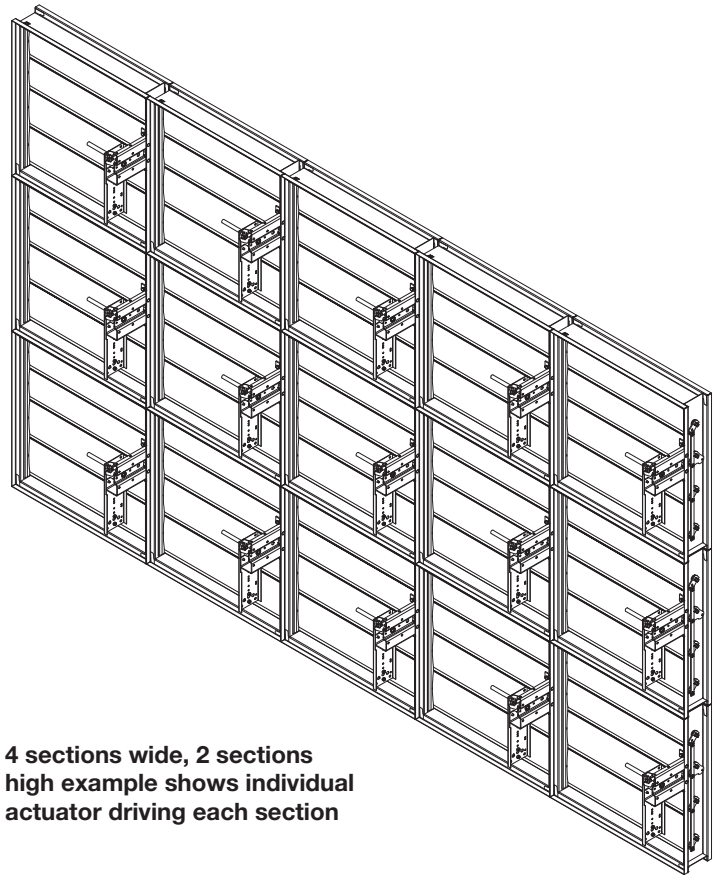

4 sections wide, 2 sections high example shows individual actuator driving each section