
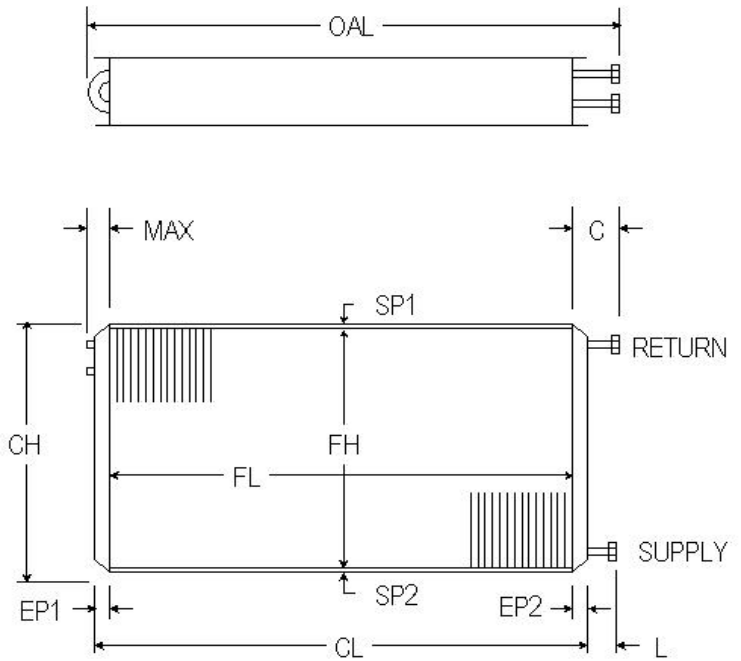


SLIP BOOSTER DRIVE

ROWS AVAILABLE	1	2	
FPI AVAILABLE	8	10	12
TUBES OD & Wall Thickness <i>COPPER ONLY</i>	5/8	.020	
	1/2	.016	
FINS Material & Thickness	ALUM.	.006	.010
	COPPER	.006	
CASING	16 GA. GALV. STEEL 16 GA. STAINLESS STEEL		
MODEL NO. (Example)	SP - Slip & Drive 8 - 8 fpi 1 - 1 row 12 - Fin Height 24 - Fin Length N - Non Headered		

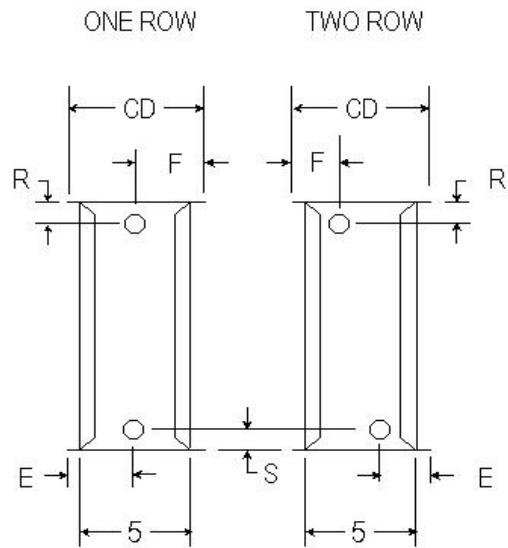

DIMENSIONAL DATA IN INCHES

$$OAL = MAX + FL + C$$

CONNECTION SIZES
3/4 MPT 1 MPT

ITEM	QTY	ROWS	FPI	SP1	FH	SP2	CH	EP1	FL	EP2	CL	CD	MAX	C	OAL	SUPPLY	RETURN	CU
				1/16		1/16		3/16		3/16		6	2 1/4	5				

P.O. #							CUSTOMER											
W.O. #							MODEL NO.											
APPROVED BY							TAG:											
DATE							NOTES											



Performance Data	CFM		EDB/EWB		LDB/LWB		CAPACITY		EWT		LWT		GPM	
------------------	-----	--	---------	--	---------	--	----------	--	-----	--	-----	--	-----	--